




10W Ultra Wide Band Power Amplifier 0.5GHz~6GHz

Features

- Gain: 42dB Typical
- Output power: +38dBm Typical
- Supply Voltage: +28V



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.5		2	2		6	GHz
Gain	35	42	46	36	40	45	dB
Gain Flatness		±3.0			±2.0		dB
Gain Variation Over Temperature (-40°C~+85°C)		±1.5			±1.5		dB
Input VSWR		1.8	2.5		1.8	2.5	: 1
Output 1dB Compression Point (P1dB)	35	38		35	37		dBm
Saturated Output Power (Psat)		40			39		dBm
Isolation S12		-65			-65		dB
Supply Current (Vcc=+28V)		600	1500		600	1500	mA
Efficiency at P1dB		20			20		%

Weight	6.5 Max ounces	Impedance	50 ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Nickel Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+29V @25°C	
RF Input Power (+28V)	@0.5~1GHz	+1dBm @25°C
	@1~6GHz	+3dBm @25°C

Biassing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +28V biasing

Power OFF Procedure

Step 1	Turn off +28V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C ~+85°C (Case Temperature)
Storage Temperature	-50°C ~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

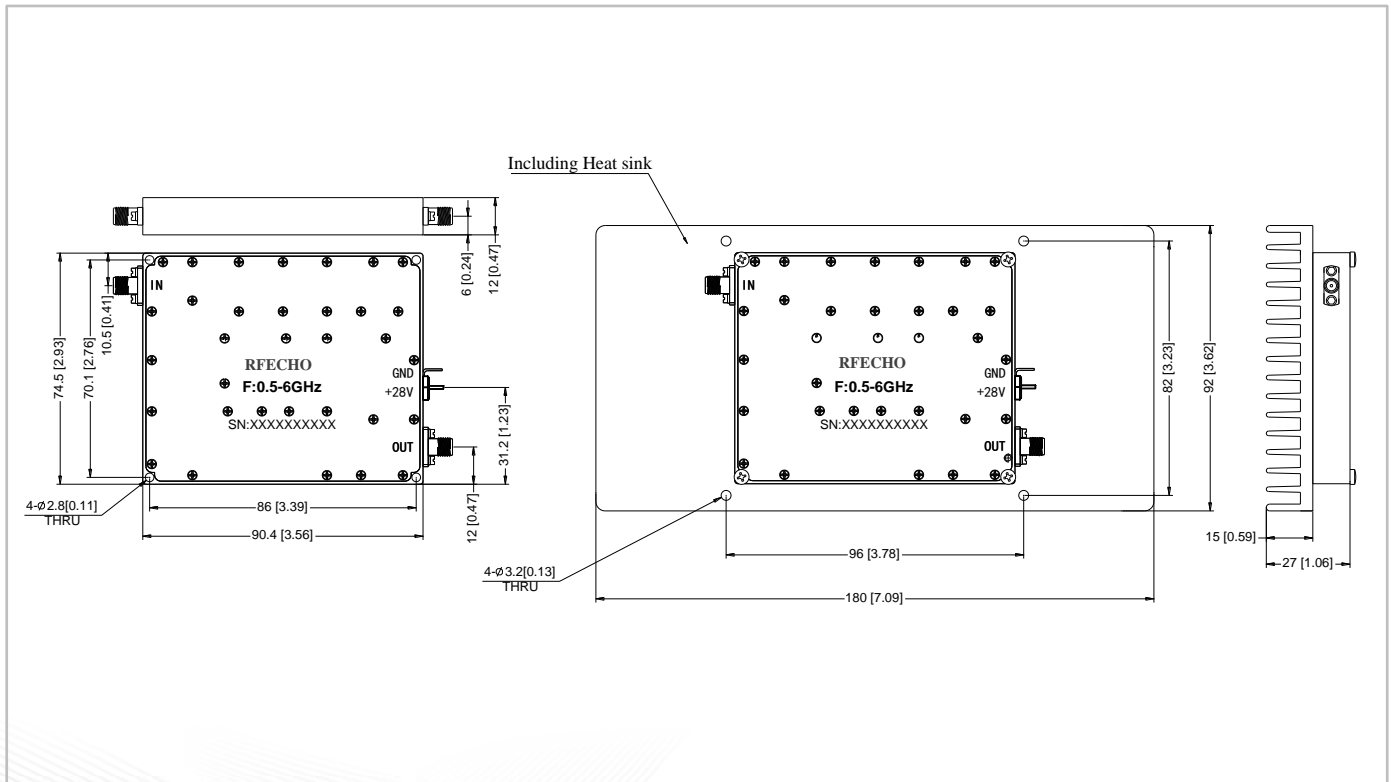





Gain@+25°C

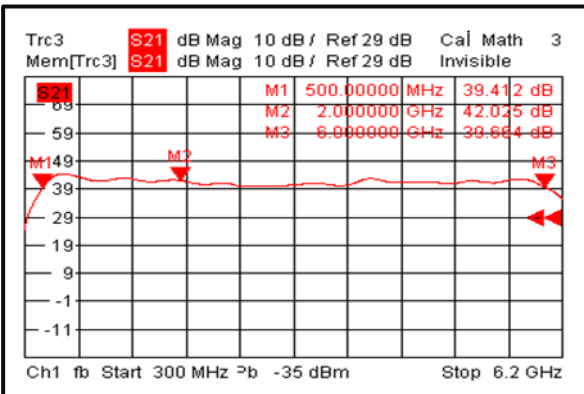


Input VSWR@+25°C

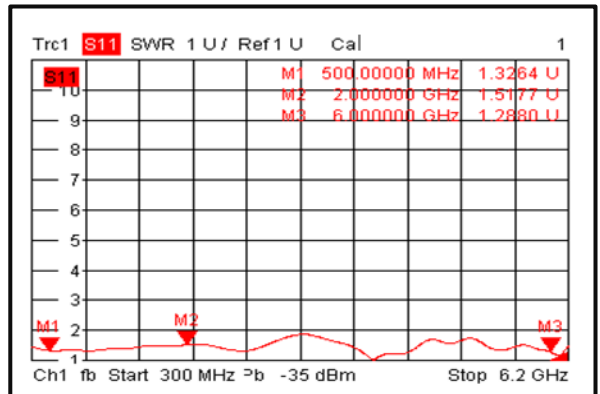


Isolation@+25°C

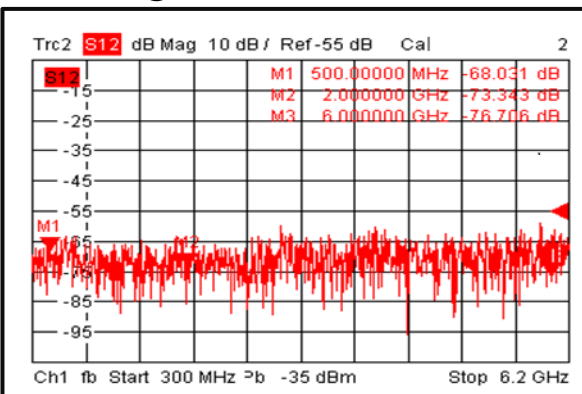


Gain@-40°C

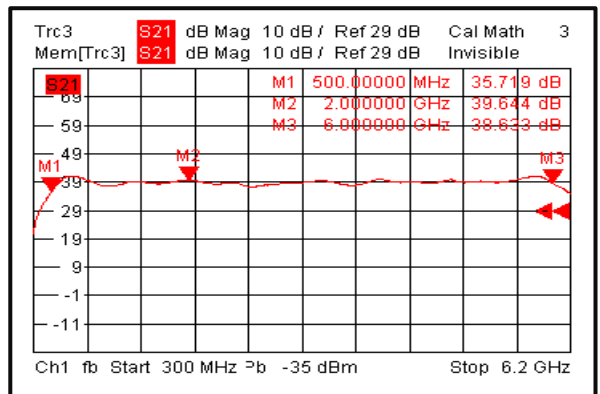

Input VSWR@-40°C

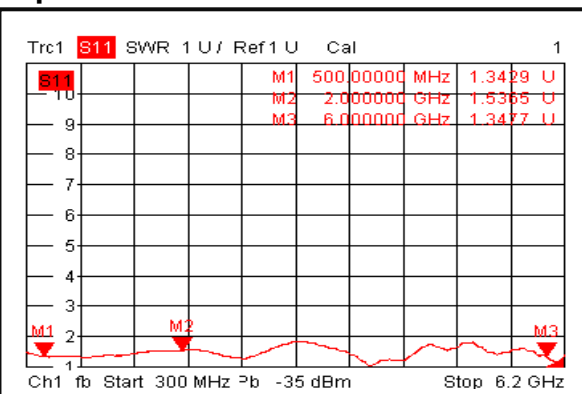


Isolation@-40°C

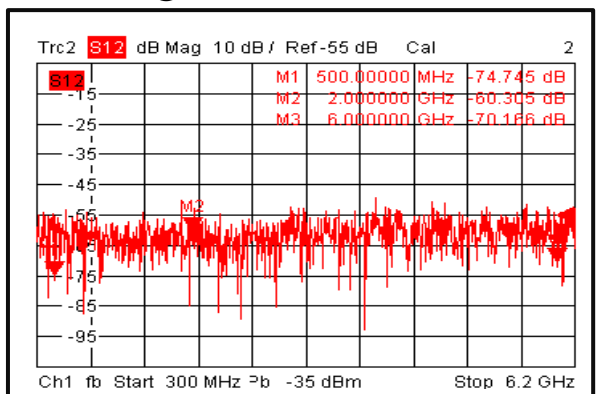





Gain @+85°C

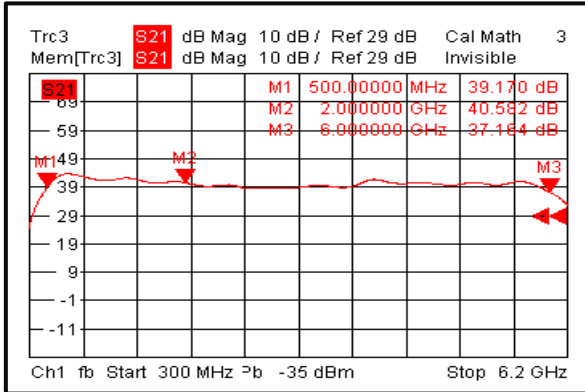


Input VSWR @+85°C

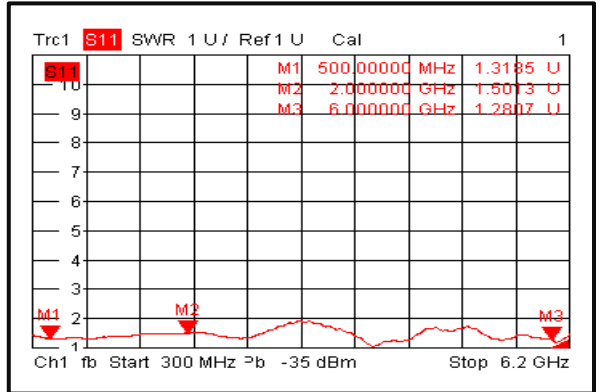


Isolation @+85°C

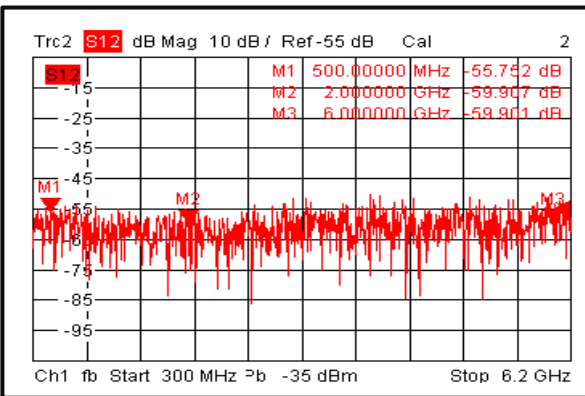


Gain vs. Output Power

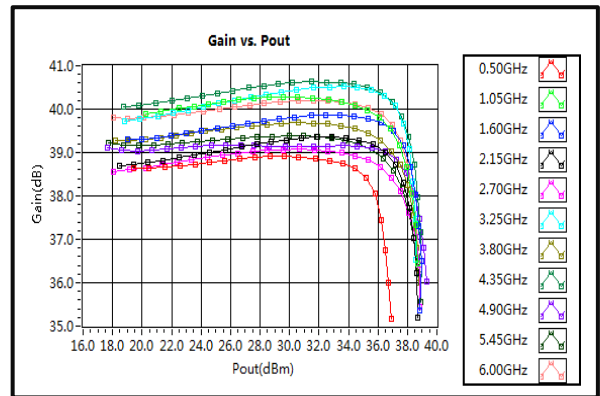

2nd Harmonic Wave Output Power

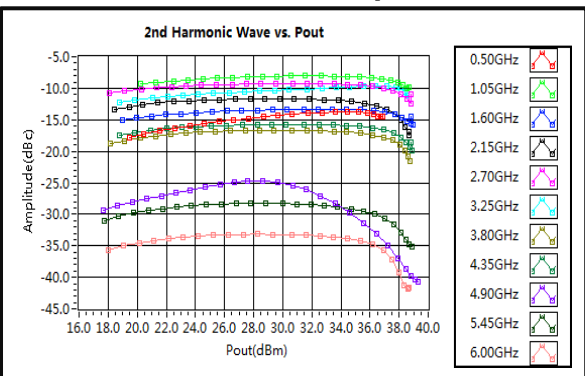


3rd Harmonic Wave Output Power

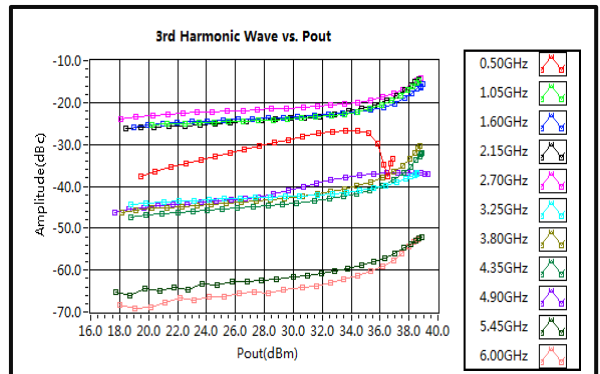





4th Harmonic Wave Output Power

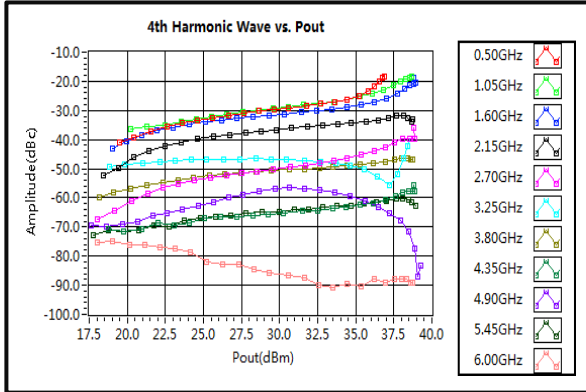


P1dB & P3dB vs. Frequency

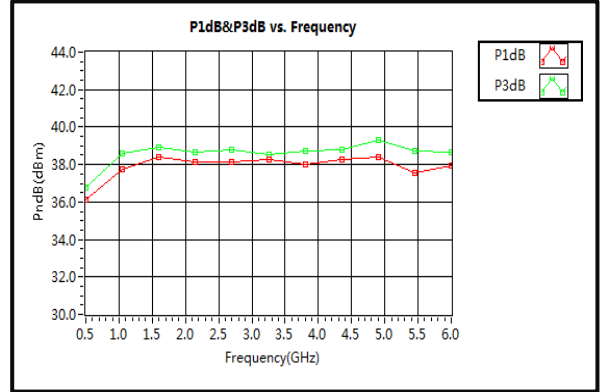


Left IM3 vs. Pout

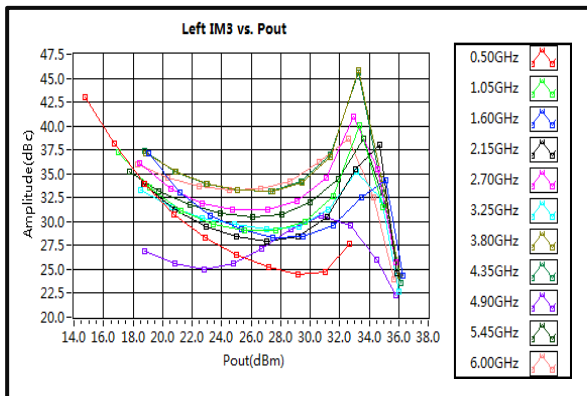

Right IM3 vs. Pout

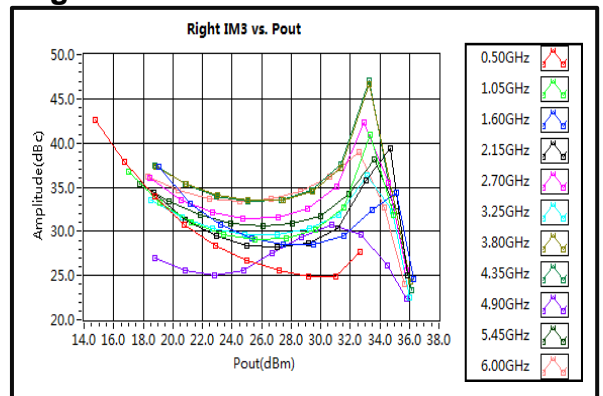

Power Added Efficiency

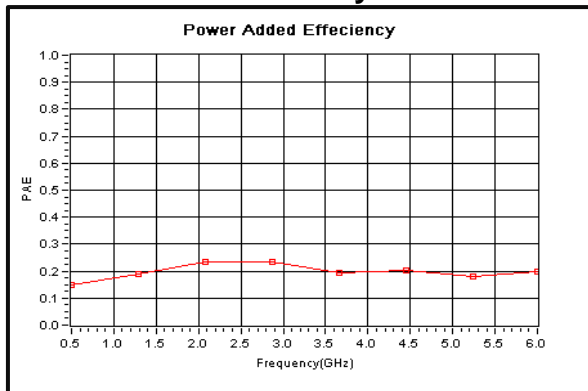

Current

