




Reflective 0.02-18GHz Coaxial SP3T Switch

Features

- Ultra Wide Band Operation 0.02-18GHz
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	0.02~6			6~12			12~18			GHz
Insertion Loss		1.8	2.5		3.8	4.5		4.2	4.8	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ °C
Isolation	60	80		70	85		70	85		dB
Input VSWR		1.5	1.8		1.6	1.8		1.6	1.8	: 1
Output VSWR		1.5	1.8		1.6	1.8		1.6	1.8	: 1
RF Input power			1			1			1	W
DC Power Dissipation (CW)		0.6			0.6			0.6		W
0.1dB Compression Point (P0.1dB)		30			30			30		dBm
IIP3		55			55			55		dBm
Switching Speed	200									ns
Weight	1.06									ounces
Impedance	50									Ω
Bias Current (+5V / -5V)	120/50									mA
Input / Output Connectors	SMA-Female									
Finish	Gold Plated									
Material	Aluminum									
Sealing	Hermetically Sealed (optional)									



Absolute Maximum Ratings

Biassing	+5V±10%/-5V±10%
----------	-----------------

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Ordering Information

Part No.	Description
DBSR0300021800A	SP3T 0.02-18GHz PIN Diode Switch

Outline Drawing:

All Dimensions in mm (inches)


Truth Table

TTL Control Voltage THRESHOLD		Low(0)=0~0.8V
Control Input TTL		High(1)=2.8~5V
C1	C2	Signal Path State
0	0	J0-J1
0	1	J0-J2
1	0	J0-J3
1	1	OFF


Control Pin Customization available upon request




Insertion Loss

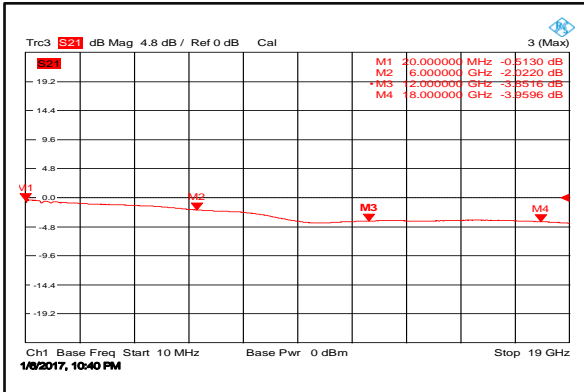


Input VSWR

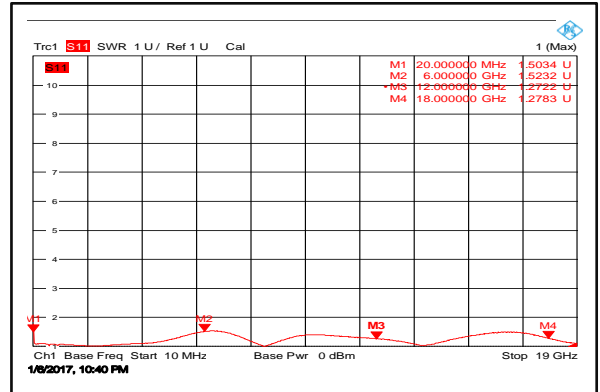


Output VSWR

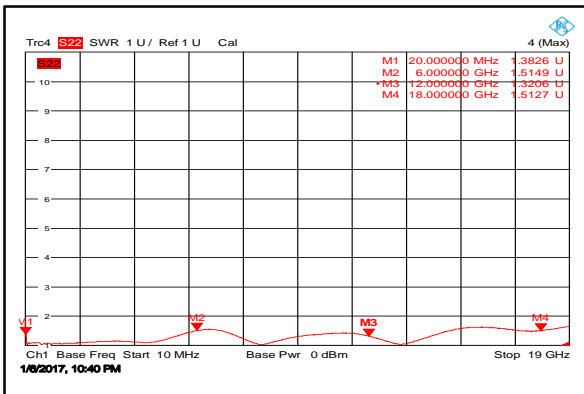

Isolation

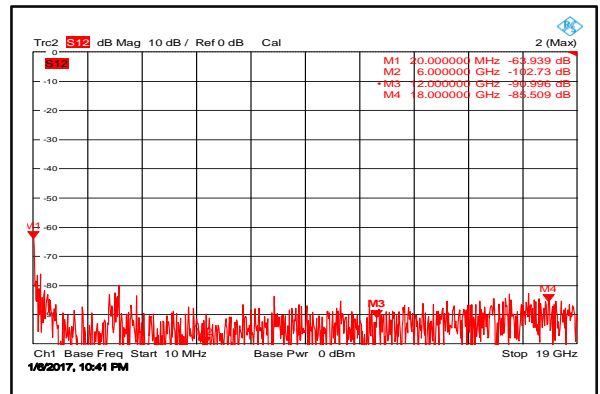

Turn on Switching Speed

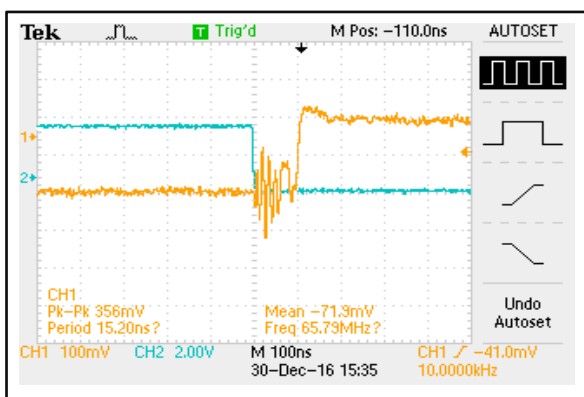

Turn off Switching Speed

