

# Reflective 50-700MHz Coaxial SP2T Switch

## Features

- Wide Band Operation 50-700MHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- High Power Cold Switching
- Customization available upon request



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameters	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		50 - 300			300 - 700		MHz
Insertion Loss		0.4	0.6		0.8	1.1	dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ ° C
Isolation	60	68		60	65		dB
Input VSWR		1.2	1.3		1.4	1.7	: 1
Output VSWR		1.2	1.3		1.4	1.7	: 1
RF Input Power (CW)			100			100	W
DC Power Dissipation		1.3			1.3		W
0.1dB Compression Point ( P0.1dB )		50			50		dBm
IIP3		55			55		dBm
Switching Speed			1.2			1.2	us
Weight		1.41					ounces
Impedance		50					Ω
Bias Current (+5V/-28V)		250/50					mA
Input / Output Connectors		SMA - Female					
Finish		Gold Plated					
Material		Aluminum					
Sealing		Hermetically Sealed (Optional)					

## Absolute Maximum Ratings

Biasing	+5V±10%/-28V±10%
---------	------------------

## Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


## Ordering Information

Part No.	Description
DBSR0200100030A	SP2T 50-700MHz PIN Diode Switch

## Outline Drawing:

All Dimensions in mm (inches)


Housing Tolerances  $\pm 0.1$  [0.004]

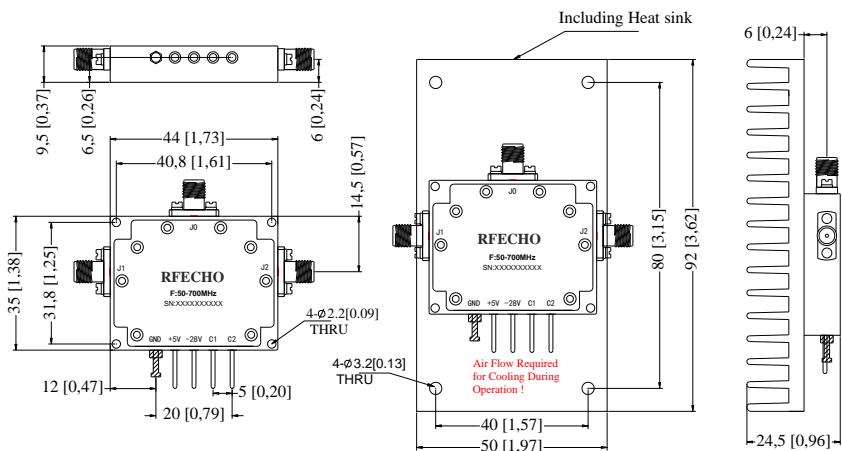


## Truth Table

<b>TTL Control Voltage THRESHOLD</b>	Low(0)=0~0.8V	
	High(1)=2.8~5V	
<b>Control Input TTL</b>	Signal Path State	
C2	C1	
0	0	OFF
0	1	J0-J1
1	0	J0-J2
1	1	NC
Control Pin Customization available upon request		


### Insertion Loss @+25°C

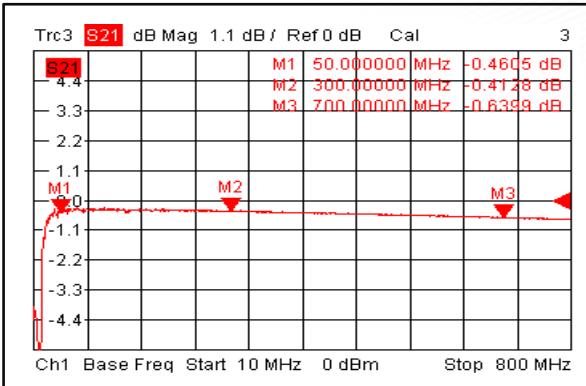


### Input VSWR @+25°C

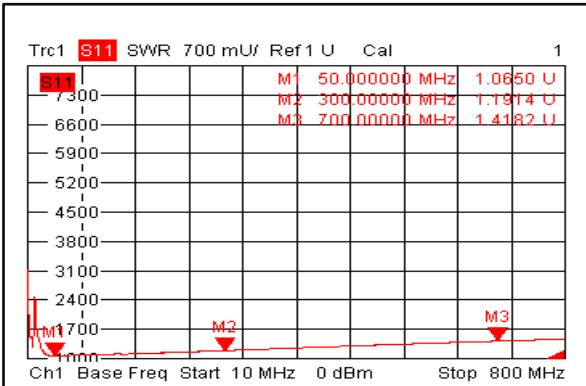


### Output VSWR @+25°C

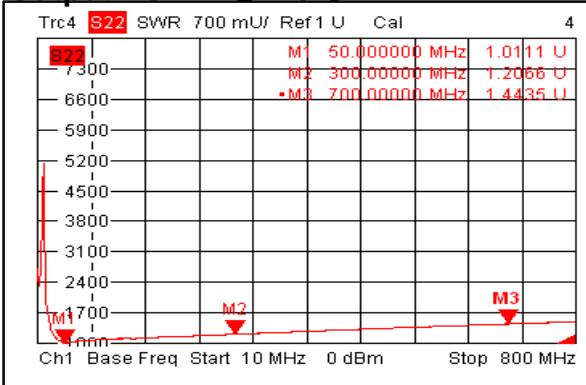


### Isolation @+25°C

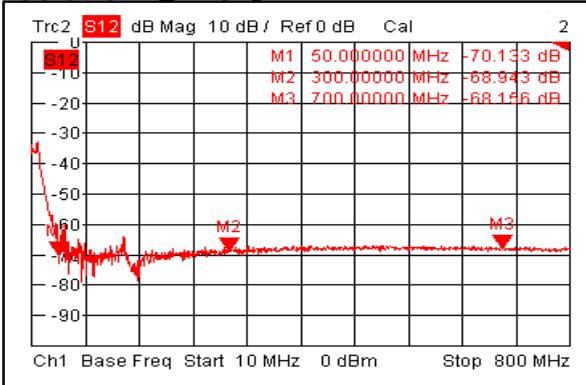


### Insertion Loss @-40°C

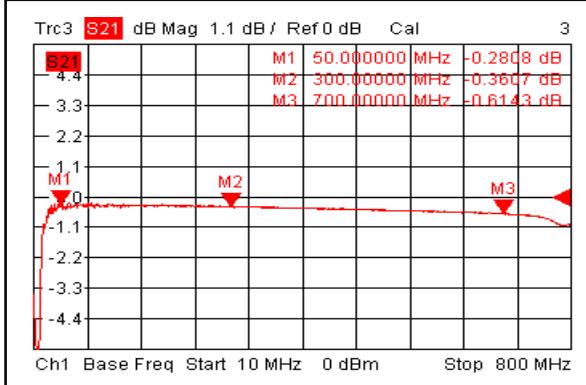


### Input VSWR @-40°C

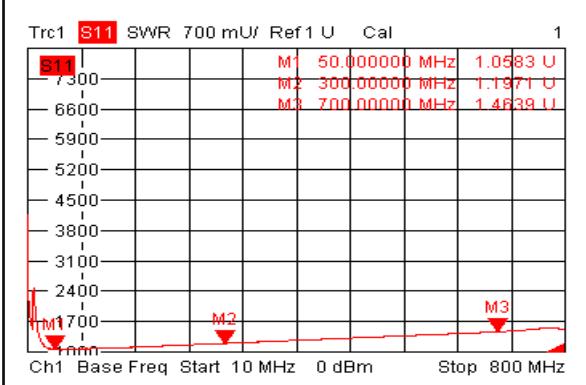


### Output VSWR @-40°C

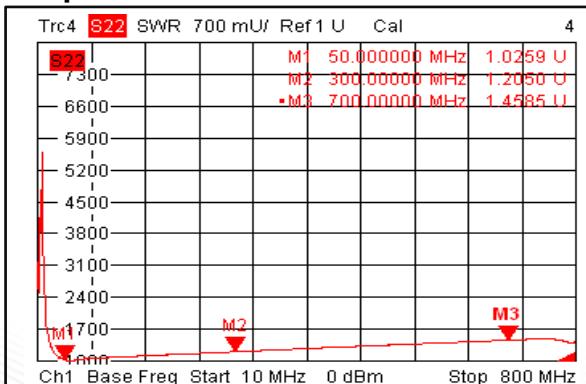


### Isolation @-40°C

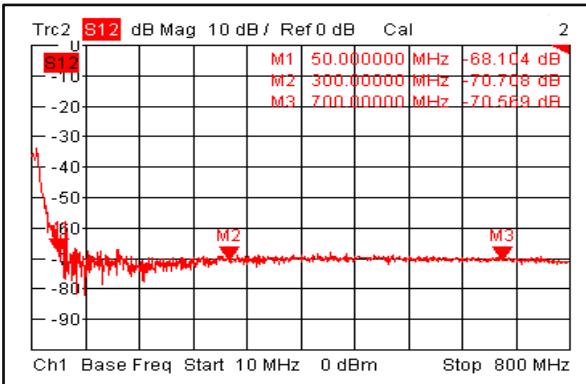


### Insertion Loss @+85°C

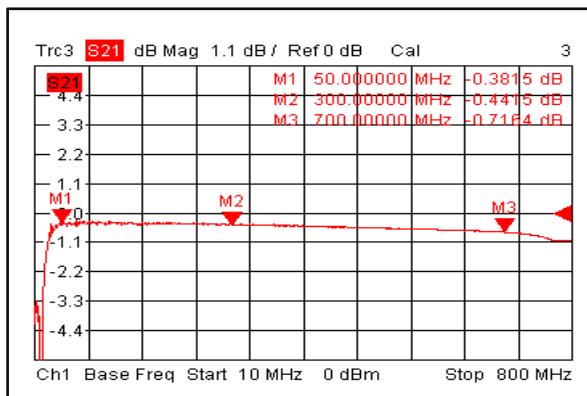


### Input VSWR @+85°C

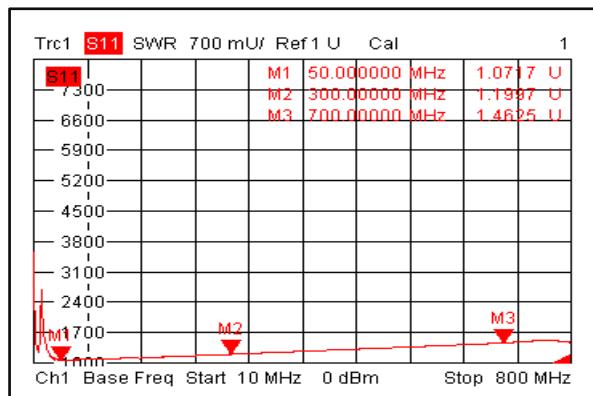


### Output VSWR @+85°C

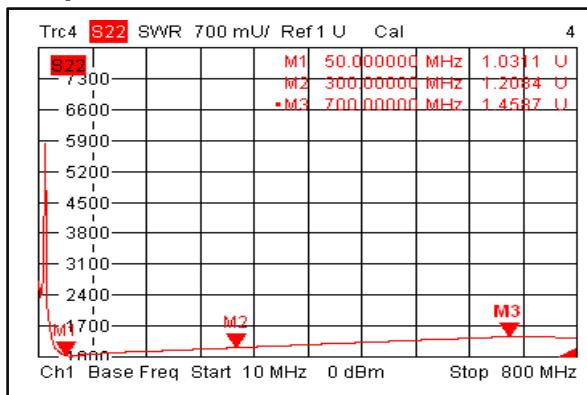

### Isolation @+85°C

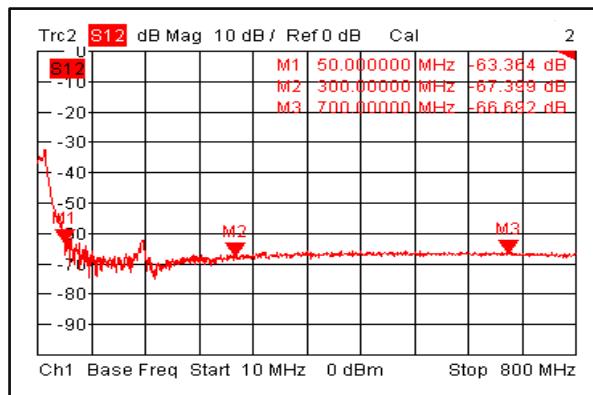

### Switching Speed

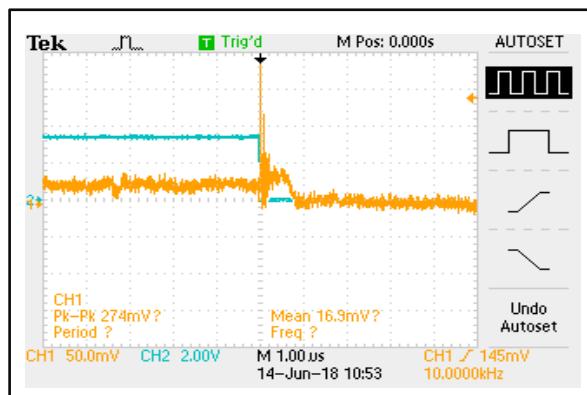

### Switching Speed

