


Absorptive 0.09-5.7GHz Coaxial SPST Switch

Features

- Ultra Wide Band Operation 0.09-5.7GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min.	Typ.	Max.	Units
Frequency Range	0.09~5.7			GHz
Insertion Loss		1.6	1.8	dB
Insertion Loss Temperature Coefficient		0.003		dB/ ° C
Isolation (J0→J1)	80	85		dB
Input VSWR		1.2	1.5	: 1
Output VSWR		1.2	1.5	: 1
RF Input Power (CW)			30	dBm
DC Power Dissipation (CW)		0.3		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed			150	ns
Weight	0.35			ounces
Impedance	50			Ω
Bias Current (+5V / -5V)	50/50			mA
Input / Output Connectors	SMA-Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			



Absolute Maximum Ratings

Biasing	+5V $\pm$ 10%/-5V $\pm$ 10%
---------	-----------------------------

Ordering Information


Part No.	Description
DBSA0100090570B	SPST 0.09-5.7GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C(Case Temperature)
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)

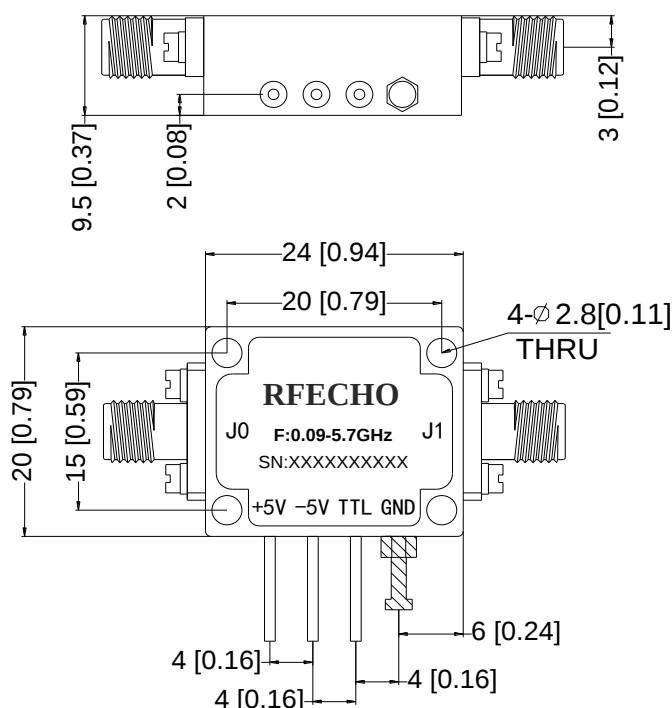

Notes:

J0: Absorptive Port


J1: Reflective port

Truth Table


TTL Control Voltage THRESHOLD	Low(0)=0~0.8V
	High(1)=2.8~5V
Control Input TTL	State
0	ON
1	OFF
Control Pin Customization available upon request	




Insertion Loss@+25°C

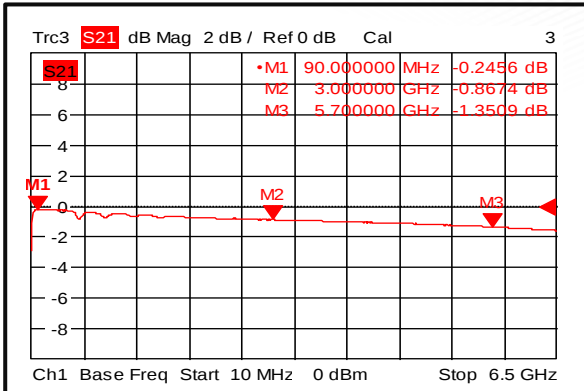


Input VSWR@+25°C

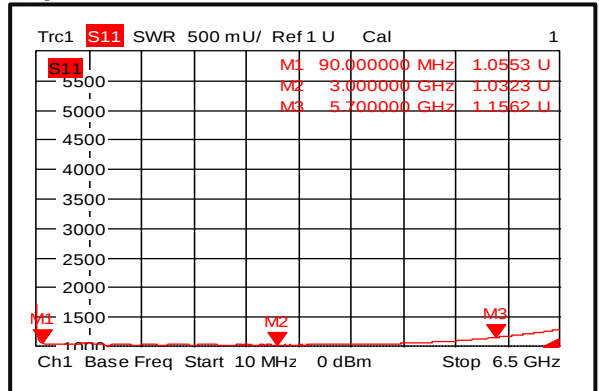


Output VSWR@+25°C

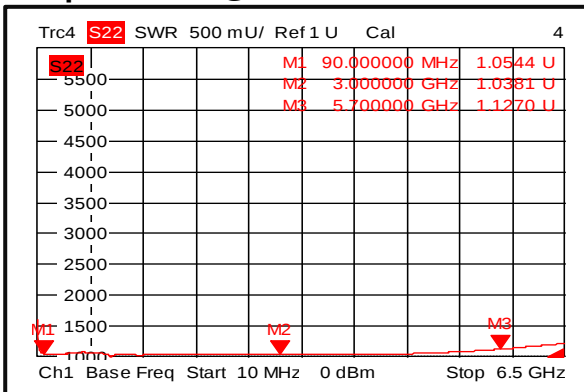


Isolation@+25°C

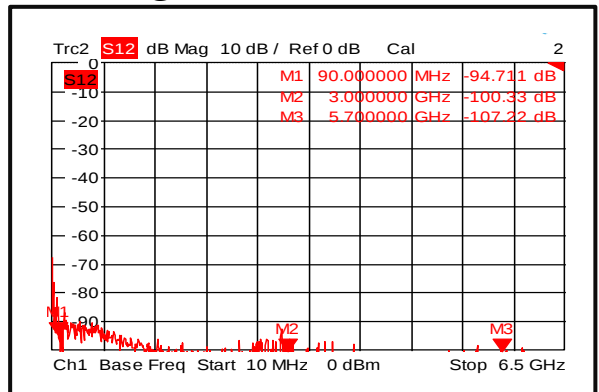


Insertion Loss @-40°C

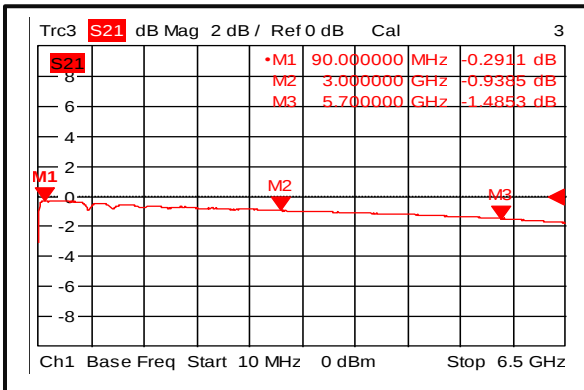


Input VSWR @-40°C

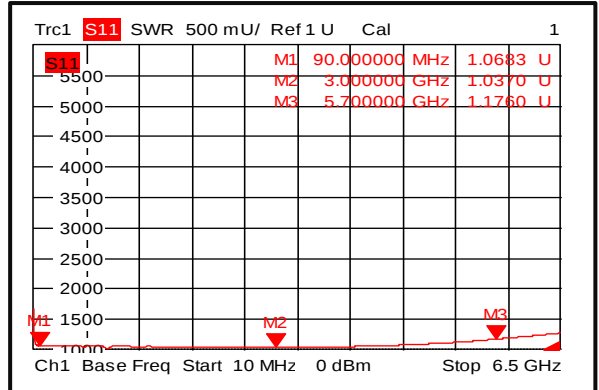


Output VSWR @-40°C

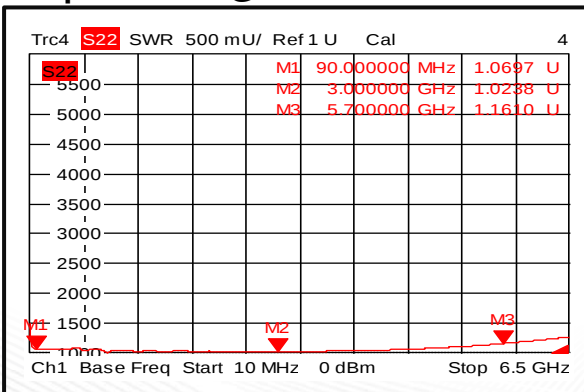


Isolation @-40°C

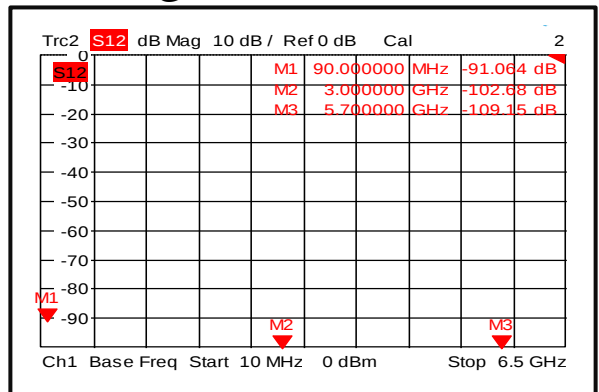


Insertion Loss @+85°C

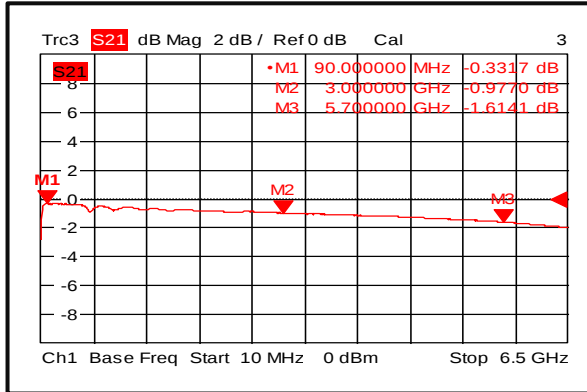


Input VSWR @+85°C

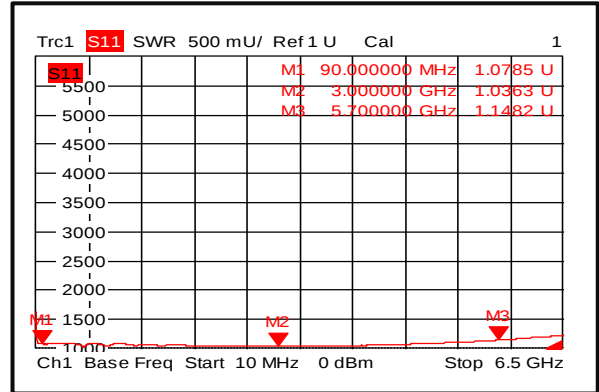


Output VSWR @+85°C

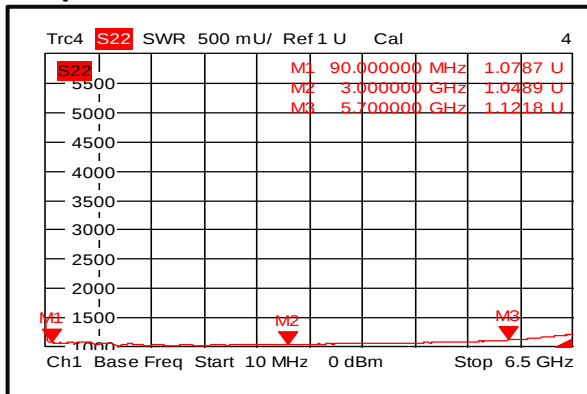

Isolation @+85°C

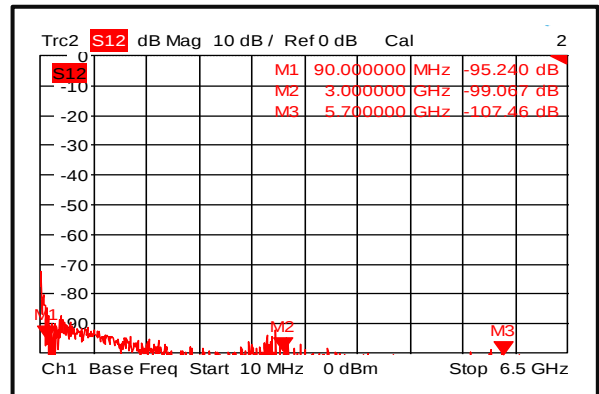

Switching Speed

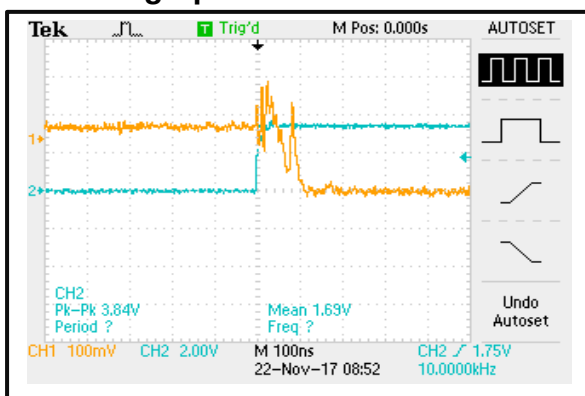

Switching Speed

