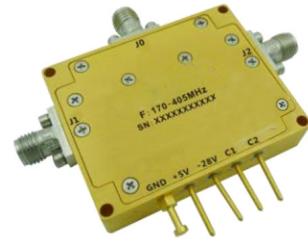


# Reflective 170-405MHz Coaxial SP2T Switch

## Features

- Wide Band Operation 170-405MHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

| Parameters                             | Min | Typ                            | Max | Units  |
|--|-----|--------------------------------|-----|--------|
| Frequency Range                        |     | 170-405                        |     | MHz    |
| Insertion Loss                         |     | 0.5                            | 0.7 | dB     |
| Insertion Loss Temperature Coefficient |     | 0.003                          |     | dB/ °C |
| Isolation                              | 60  | 65                             |     | dB     |
| Input VSWR                             |     | 1.4                            | 1.5 | : 1    |
| Output VSWR                            |     | 1.4                            | 1.5 | : 1    |
| RF Input Power (CW)                    |     |                                | 100 | W      |
| DC Power Dissipation                   |     | 1.3                            |     | W      |
| 0.1dB Compression Point( P0.1dB )      |     | 50                             |     | dBm    |
| IIP3                                   |     | 55                             |     | dBm    |
| Switching Speed                        |     |                                | 1.2 | us     |
| Weight                                 |     | 1.41                           |     | ounces |
| Impedance                              |     | 50                             |     | Ω      |
| Bias Current (+5V/-28V)                |     | 250/50                         |     | mA     |
| Input / Output Connectors              |     | SMA - Female                   |     |        |
| Finishing                              |     | Gold Plating                   |     |        |
| Material                               |     | Aluminum                       |     |        |
| Sealing                                |     | Hermetically Sealed (Optional) |     |        |



## Absolute Maximum Ratings

|          |                  |
|----------|------------------|
| Biassing | +5V±10%/-28V±10% |
|----------|------------------|

## Environmental Specifications

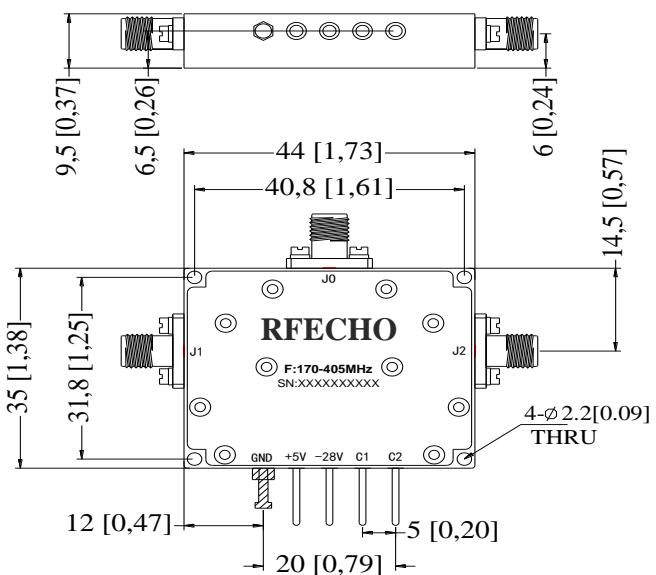
|                         |   |
|-------------------------|---|
| Operational Temperature | -40°C~+60°C   |
| Storage Temperature     | -50°C~+105°C  |
| Altitude                | 30,000 ft. (Epoxy Sealed Controlled environment)                                |
|                         | 60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional) |
| Vibration               | 25g RMS (15 degrees 2KHz) endurance, 1 hour per axis                            |
| Humidity                | 100% RH at 35°C, 95%RH at 40°C  |
| Shock                   | 20G for 11msec half sine wave, 3 axis both directions                           |

## Ordering Information

| Part No.        | Description                      |
|-----------------|----------------------------------|
| DBSR0200170040A | SP2T 170-405MHz PIN Diode Switch |

## Outline Drawing:

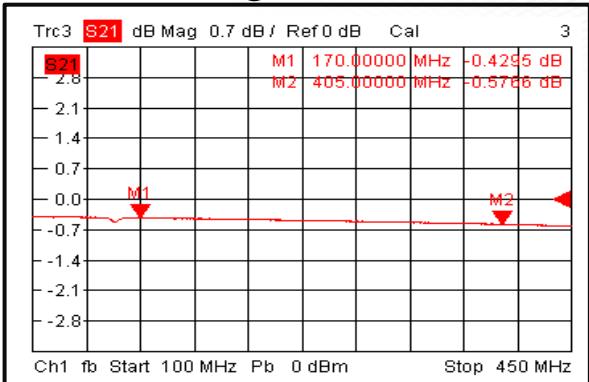
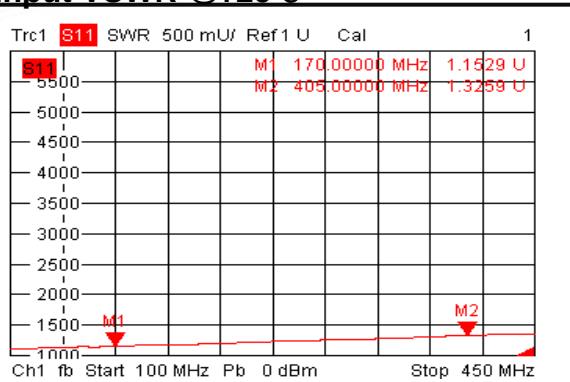
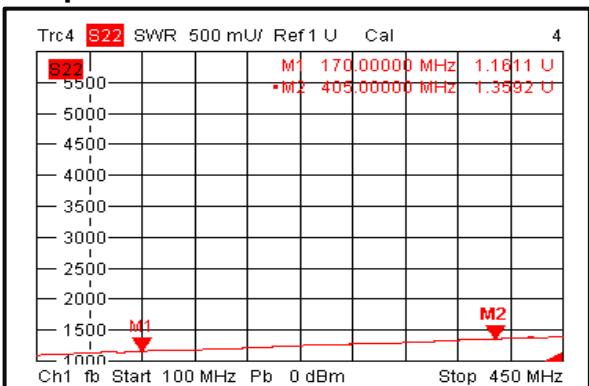
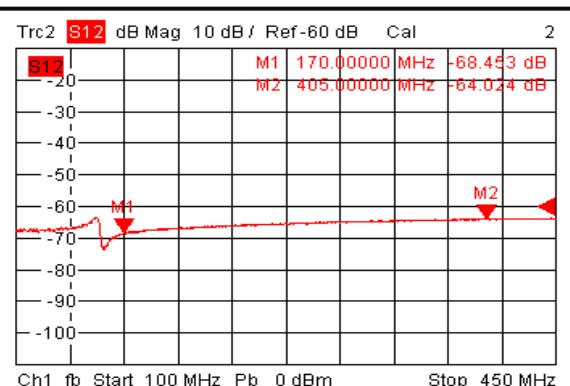
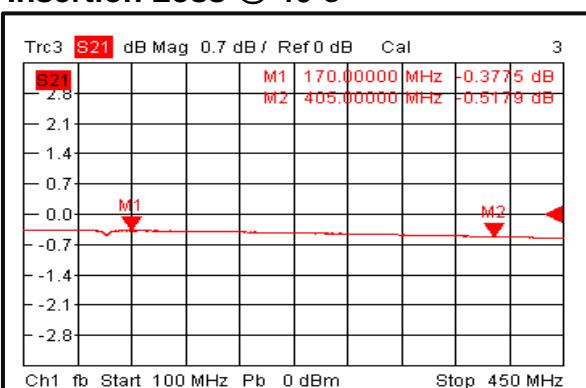
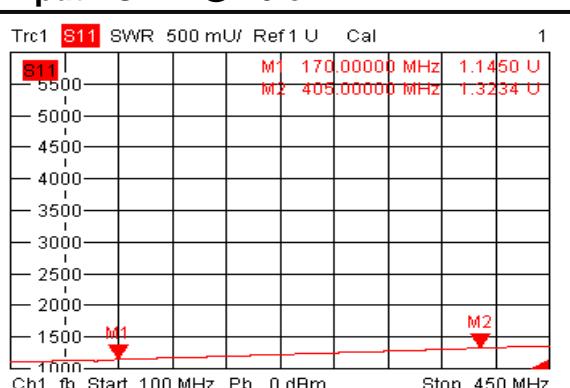
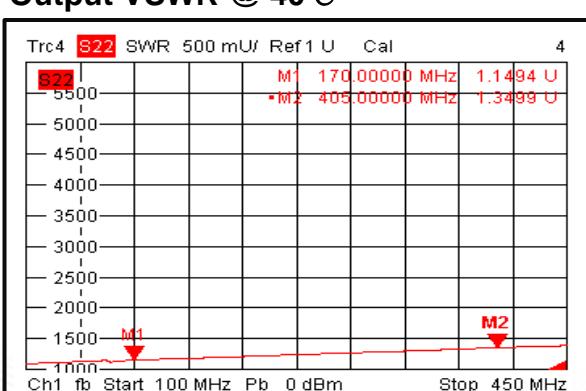
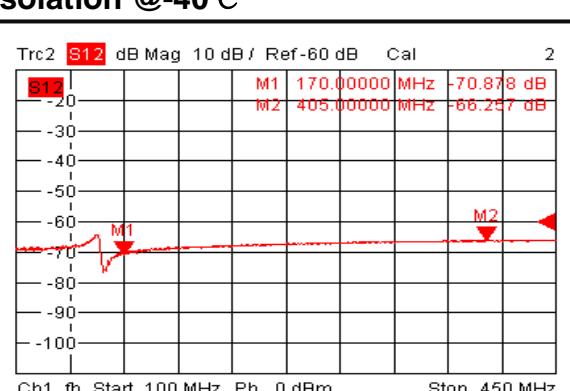
All Dimensions in mm (inches)



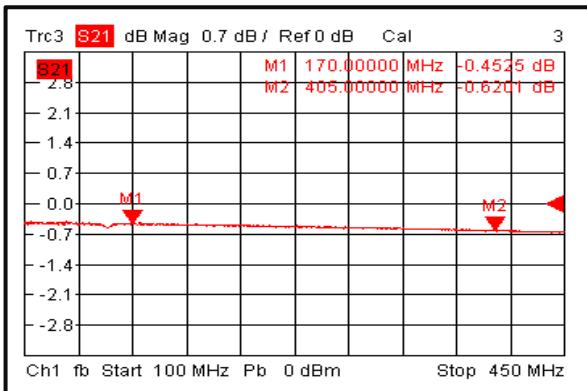
## Truth Table

| TTL Control Voltage | Low(0)=0~0.8V     |          |
|---------------------|-------------------|----------|
| THRESHOLD           | High(1)=2.8~5V    |          |
| Control Input TTL   | Signal Path State |          |
| C2                  | C1                |          |
| 0                   | 0                 | OFF      |
| 0                   | 1                 | J0-J1    |
| 1                   | 0                 | J0-J2    |
| 1                   | 1                 | Not Used |

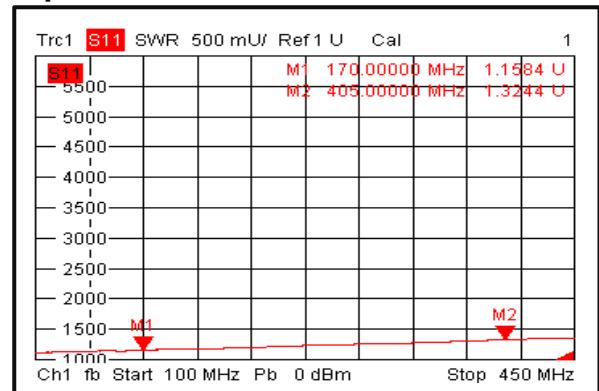
Control Pin Customization available upon request

**Insertion Loss @+25°C**

**Input VSWR @+25°C**

**Output VSWR @+25°C**

**Isolation @+25°C**

**Insertion Loss @-40°C**

**Input VSWR @-40°C**

**Output VSWR @-40°C**

**Isolation @-40°C**


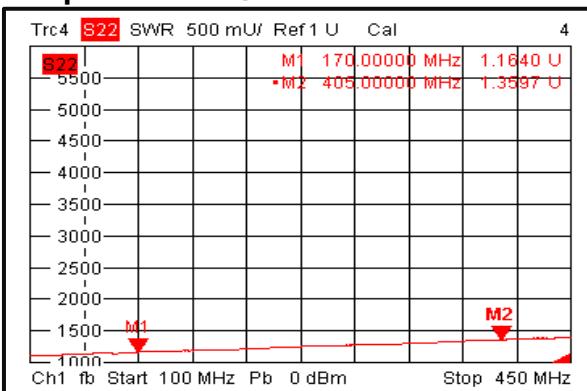
### Insertion Loss @+60°C



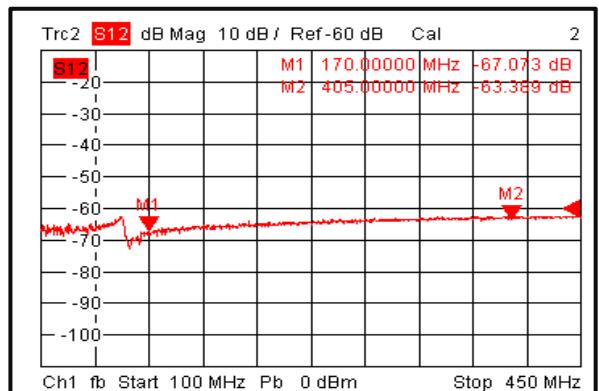
### Input VSWR @+60°C



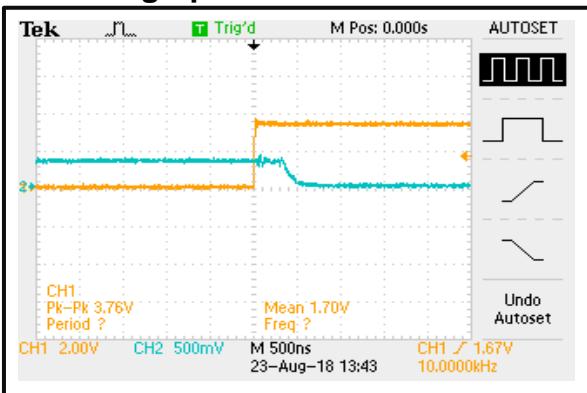
### Output VSWR @+60°C



### Isolation @+60°C



### Switching Speed



### Switching Speed

