




Absorptive 0.5-43.5GHz Coaxial SP8T Switch

Features

- Ultra Wide Band Operation 0.5-43.5GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- Test and measurement Instrument
- Fiber Optics

RF Microwave & VSAT

5G communication

Parameters	Min	Typ.	Max	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	0.5		8	8		26.5	26.5		43.5	GHz
Insertion Loss		4.2	4.5		6.5	7		7.5	8.5	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ ° C
Isolation (Adjacent channels)	60	70		50	58		48	55		dB
Isolation (Between any channels)	60	70		50	58		42	50		dB
Input VSWR		2	3		1.9	3		1.8	2.5	: 1
Output VSWR		2	3		1.9	3		1.8	2.5	: 1
RF Input power			23			23			23	dBm
DC Power Dissipation		0.8			0.8			0.8		W
0.1dB Compression Point(P0.1dB)		23			23			23		dBm
IIP3		42			43			36		dBm
Switching Speed	50 typ. 100 Max.									ns
Weight	1.8Max.									ounces
Impedance	50									Ω
Bias Current (+5V/-5V)	200/50 Max.									mA
Input / Output Connectors	2.92mm - Female									
Finish	Gold Plated									
Material	Aluminum									



Absolute Maximum Ratings

Biassing	+5V ± 10%/-5V ± 10%
----------	---------------------


Ordering Information

Part No.	Description
DBSA0800504350A	SP8T 0.5-43.5GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°c
Shock	20G for 11msec half sine wave,3 axis both directions

Outline Drawing:
All Dimensions in mm (inches)

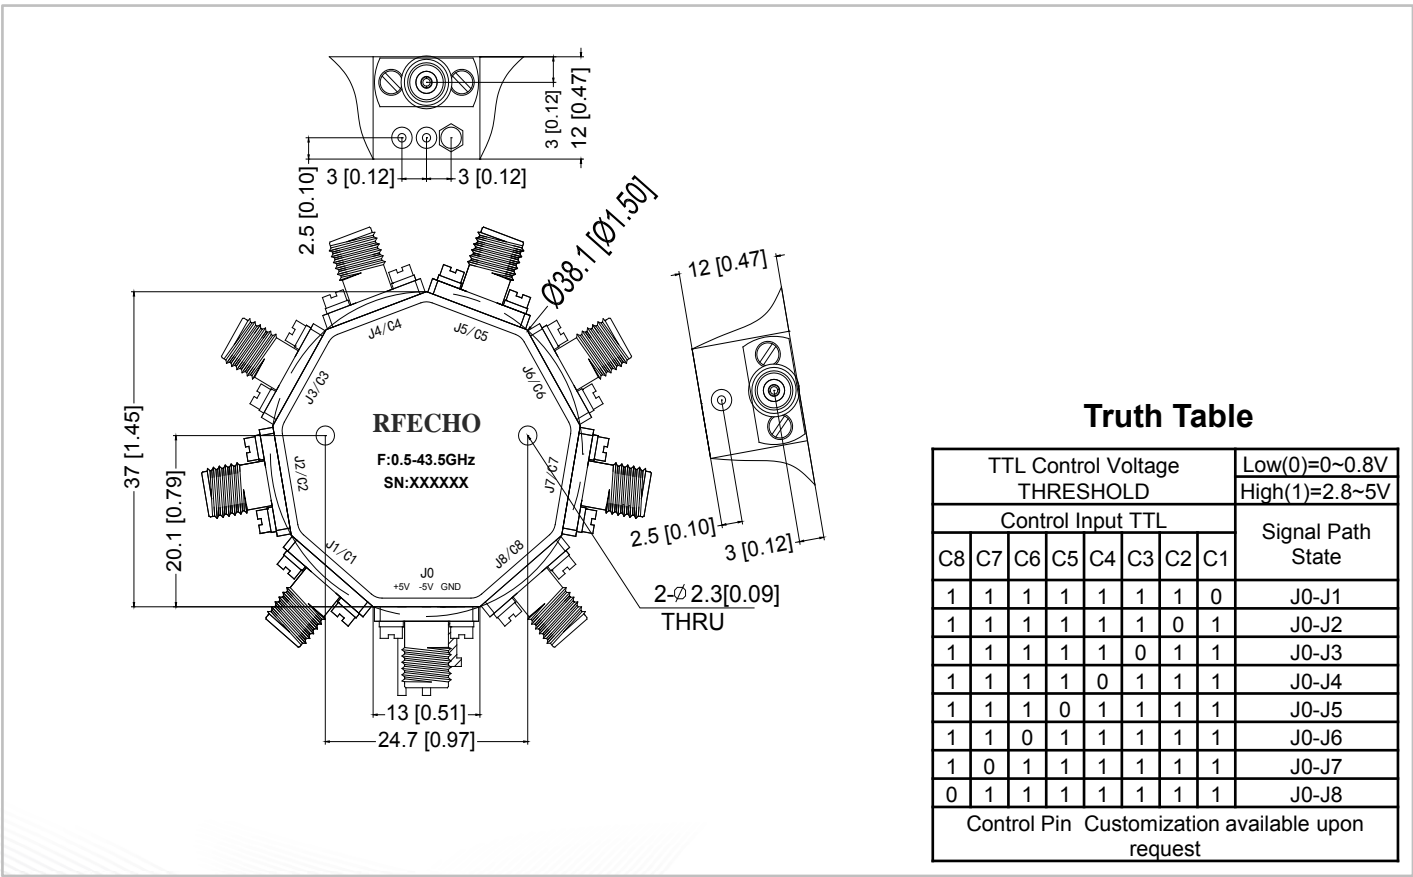


Truth Table

TTL Control Voltage THRESHOLD								Low(0)=0~0.8V	High(1)=2.8~5V
Control Input TTL								Signal Path State	
C8	C7	C6	C5	C4	C3	C2	C1		
1	1	1	1	1	1	1	0	J0-J1	
1	1	1	1	1	1	0	1	J0-J2	
1	1	1	1	1	0	1	1	J0-J3	
1	1	1	1	0	1	1	1	J0-J4	
1	1	0	1	1	1	1	1	J0-J5	
1	0	1	1	1	1	1	1	J0-J6	
0	1	1	1	1	1	1	1	J0-J7	
0	1	1	1	1	1	1	1	J0-J8	


Control Pin Customization available upon request




Insertion Loss @+25°C

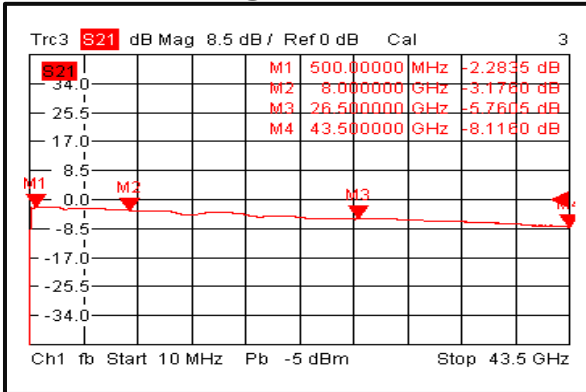


Input VSWR @+25°C

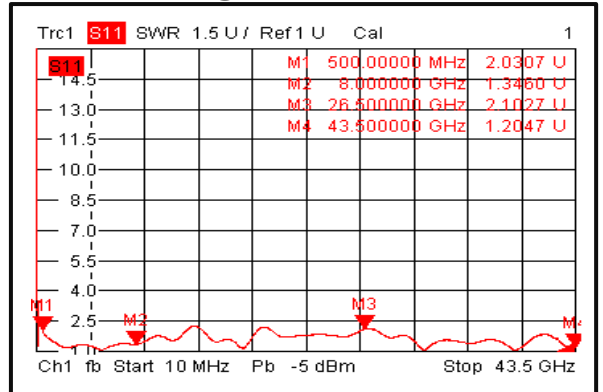


Output VSWR @+25°C

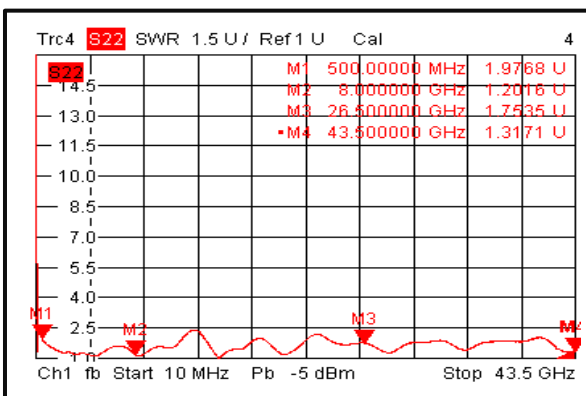


Isolation @+25°C

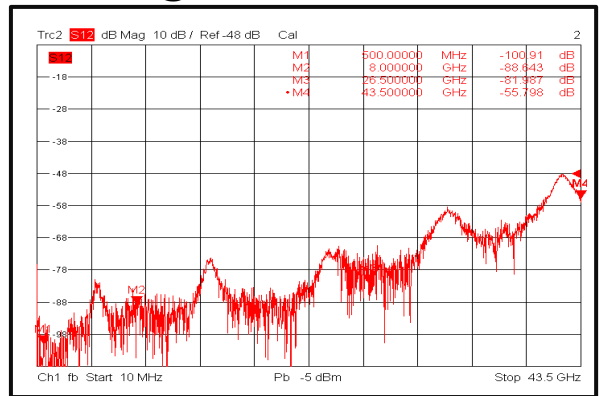

Insertion Loss @-40°C

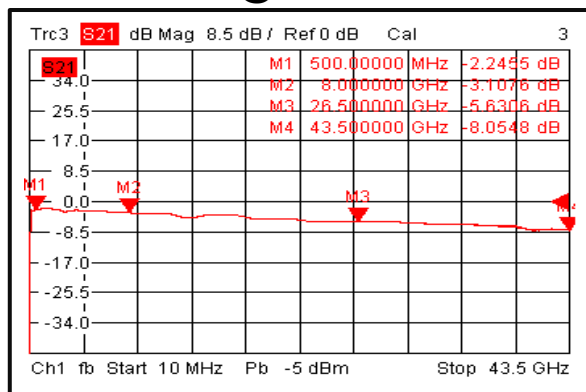


Input VSWR @-40°C

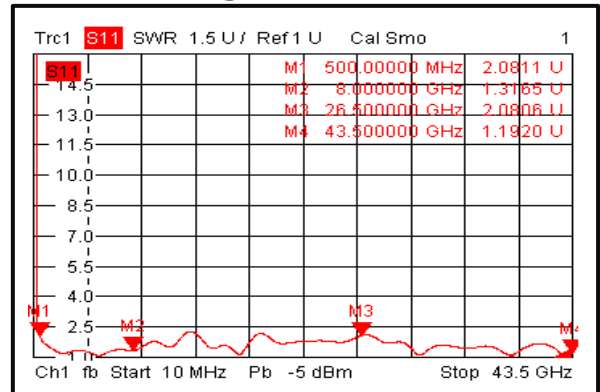





Output VSWR @-40°C

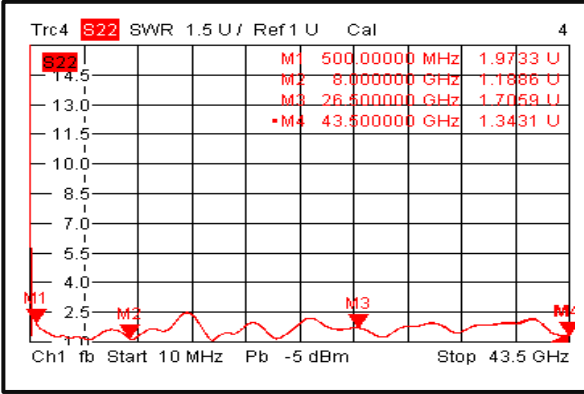


Isolation @-40°C

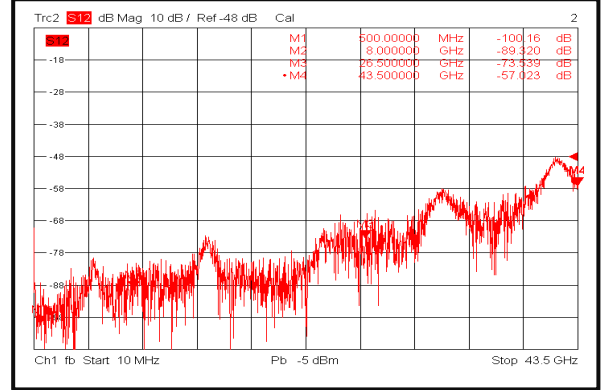


Insertion Loss @+85°C

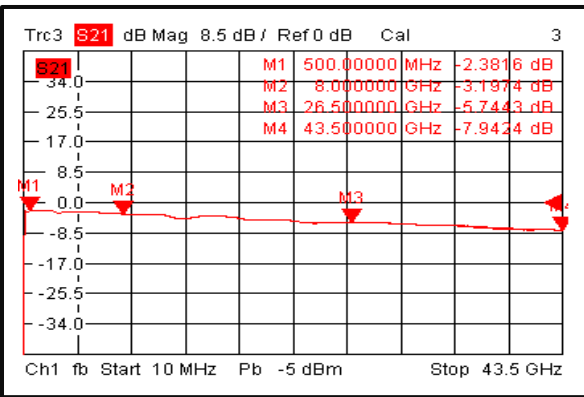


Input VSWR @+85°C

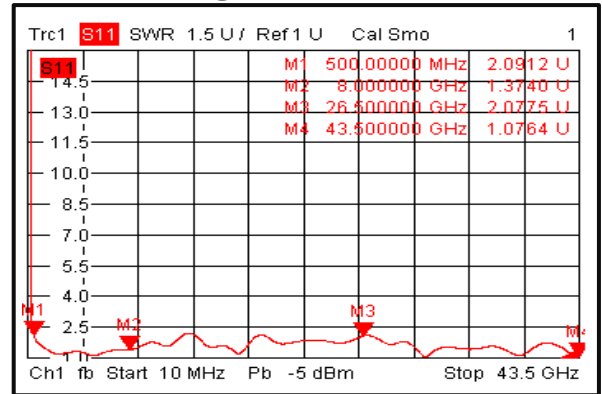

Output VSWR @+85°C

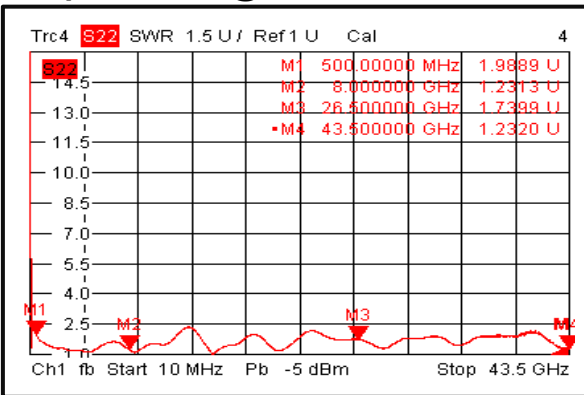


Isolation @+85°C

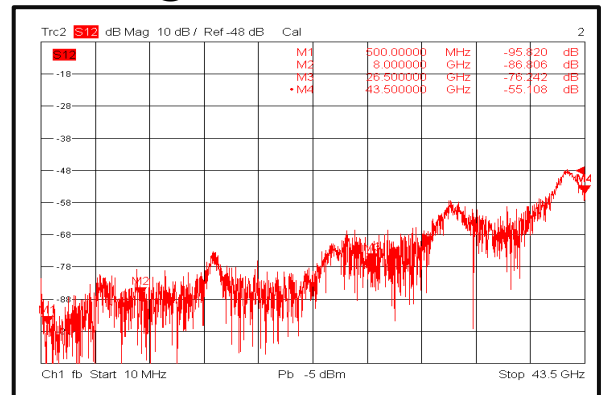





Insertion Loss Temperature Coefficient

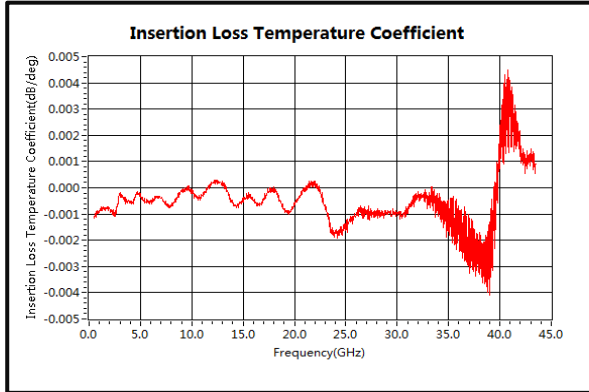


Insertion Loss vs. Temperature

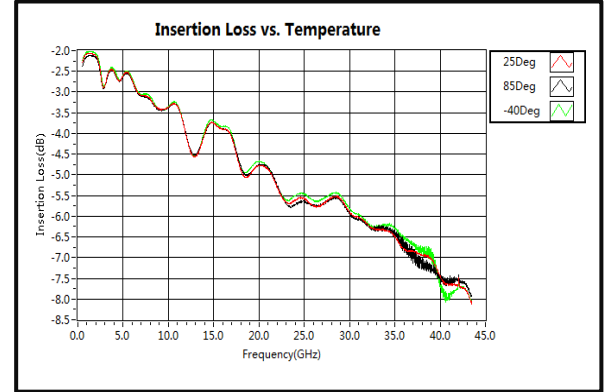

IIP3

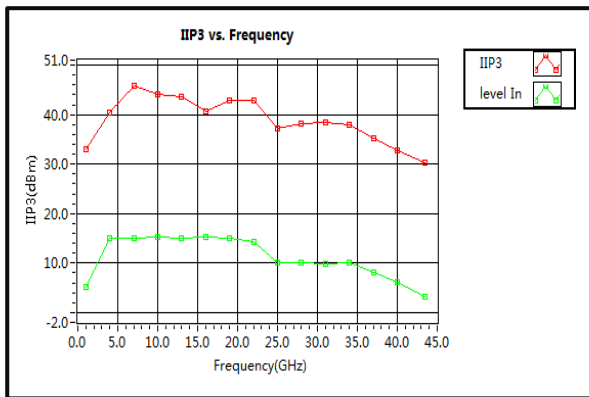

Switching Speed

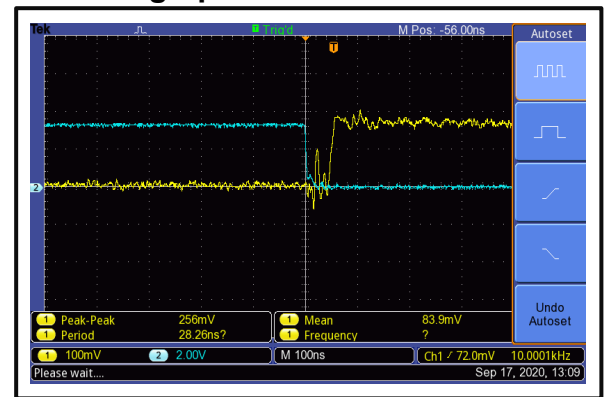

Switching Speed

