


Absorptive 0.5-4GHz Coaxial SP2T Switch

Features

- Wide Band Operation 0.5-4GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- High Power Cold Switching
- Customization available upon request

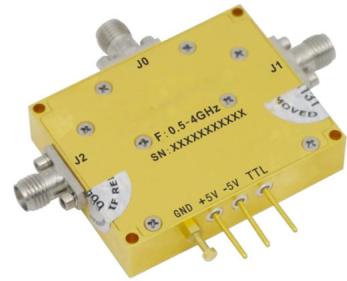

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min.	Typ.	Max.	Units
Frequency Range		0.5 - 4		GHz
Insertion Loss		1.2	1.5	dB
Insertion Loss Temperature Coefficient		0.003		dB/ ° C
Isolation	70	85		dB
Input VSWR		1.3	1.5	: 1
Output VSWR		1.3	1.5	: 1
RF Input Power (CW)			5	W
DC Power Dissipation		0.6		W
0.1dB Compression Point (P0.1dB)		37		dBm
IIP3		55		dBm
Switching Speed		500 Max.		ns
Weight		1.41		ounces
Impedance		50		Ω
Bias Current (+5V/-5V)		200		mA
Input / Output Connectors		SMA - Female		
Finish		Gold Plated		
Material		Aluminum		
Sealing		Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
---------	-----------------

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment) 60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


Ordering Information

Part No.	Description
DBSA0200500400C	SP2T 0.5-4GHz PIN Diode Switch

Outline Drawing:

All Dimensions in mm (inches)

Housing Tolerances ± 0.1 [0.004]

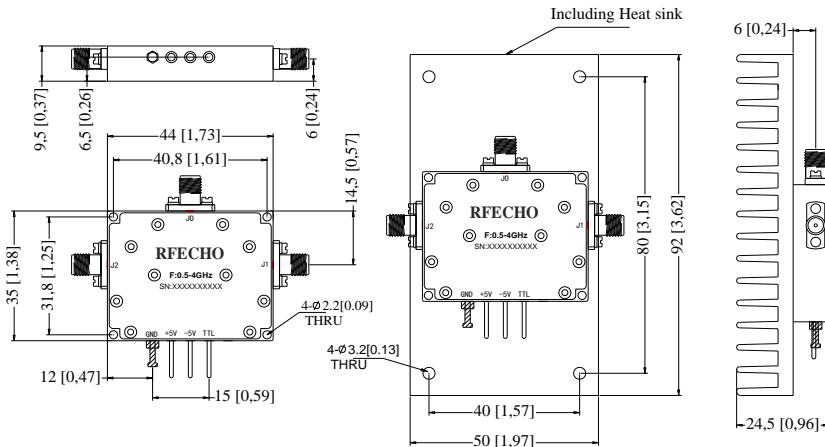


Truth Table


TTL Control Voltage THRESHOLD	Low(0)=0~0.8V High(1)=2.8~5V
Control Input TTL	Signal Path State
0	J0-J1
1	J0-J2

Control Pin Customization available upon request


Insertion Loss @+25°C

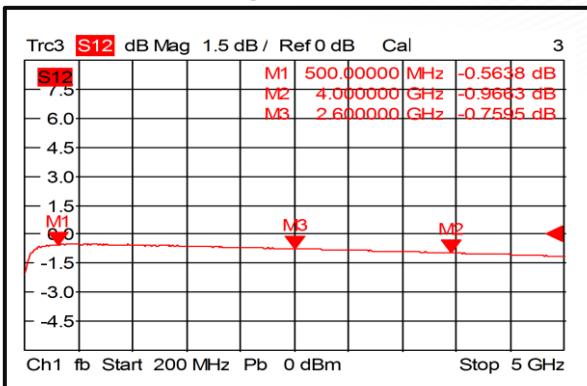


Input VSWR @+25°C

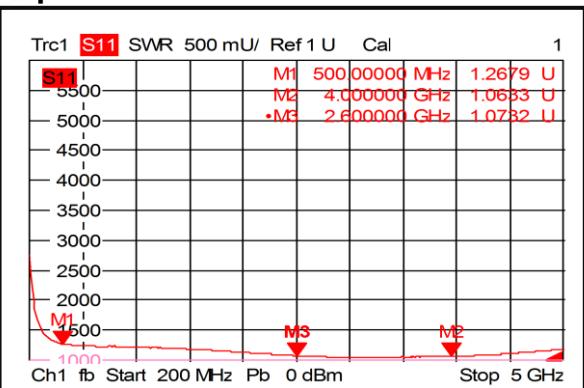


Output VSWR @+25°C

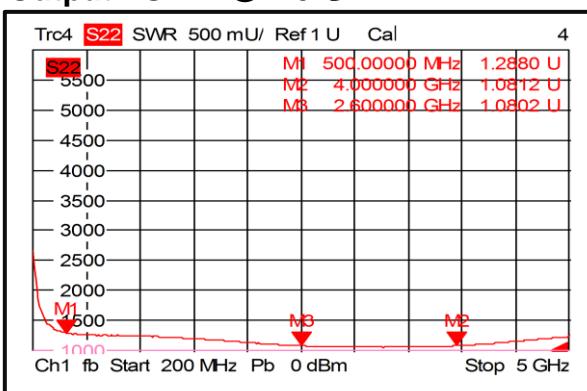


Isolation @+25°C

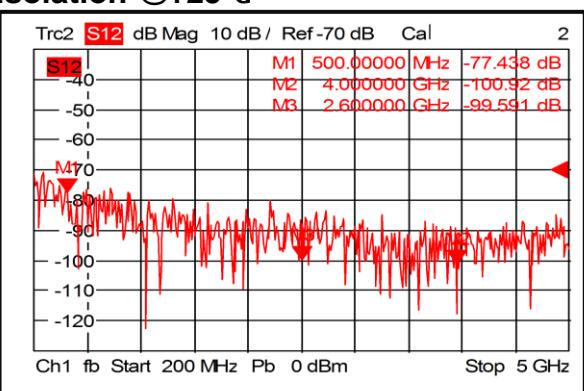


Insertion Loss @-40°C

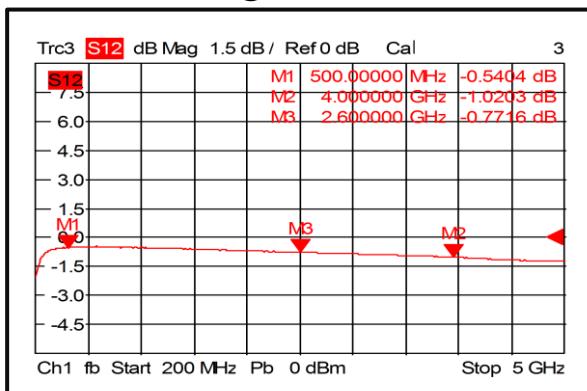


Input VSWR @-40°C

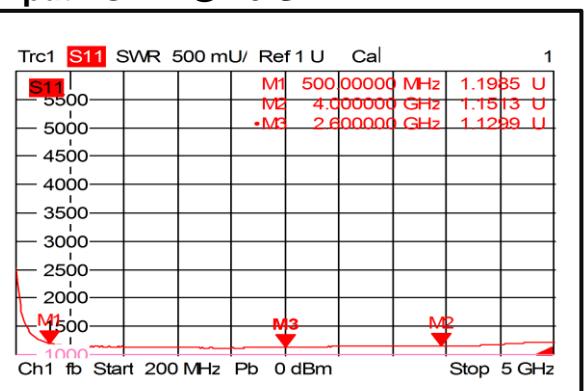


Output VSWR @-40°C

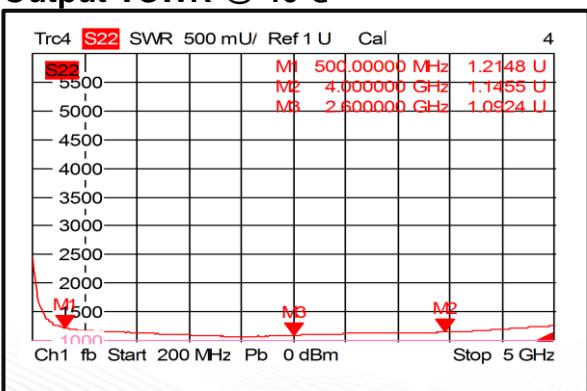


Isolation @-40°C

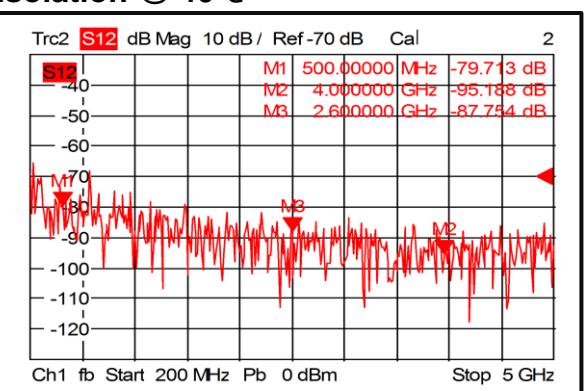


Insertion Loss @+85°C

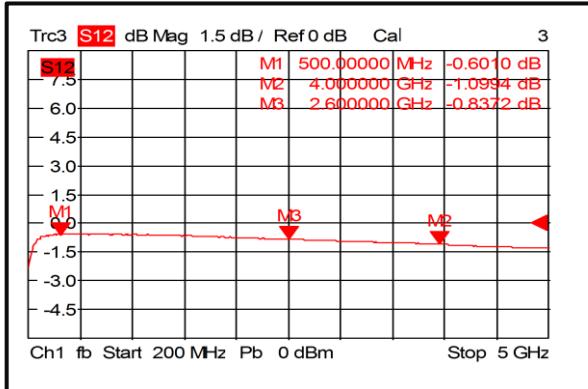


Input VSWR @+85°C

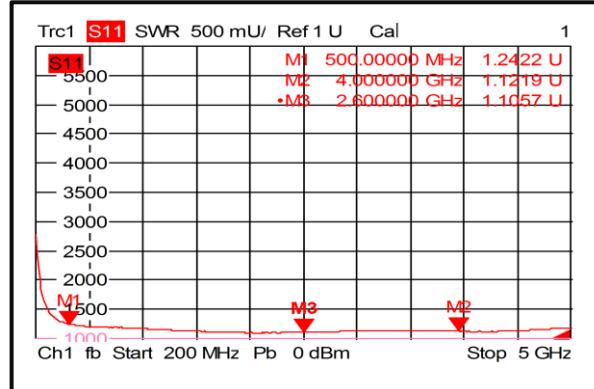


Output VSWR @+85°C

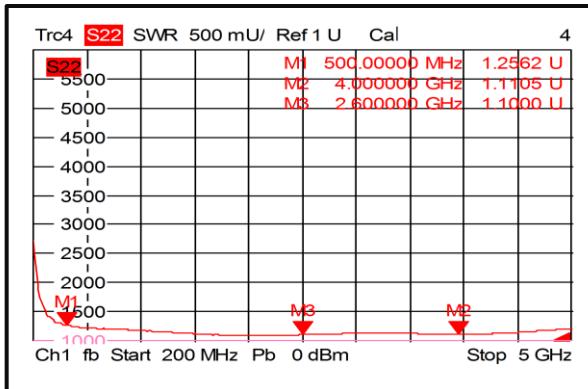

Isolation @+85°C

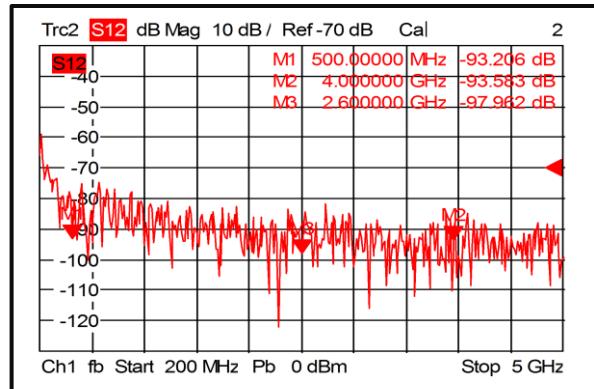

Switching Speed

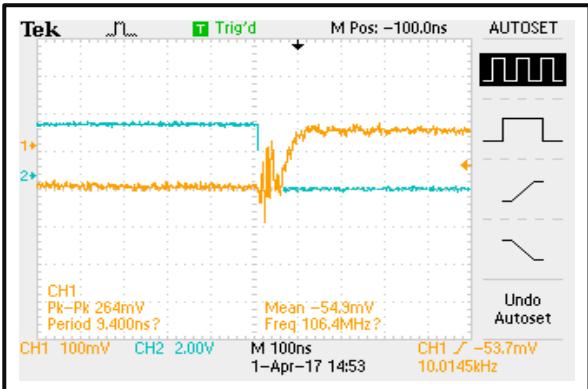

Switching Speed

