


Absorptive Coaxial SP2T Switch 1 - 2GHz

Features

- Wide Band Operation 1-2GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Units
Frequency Range	1~2			GHz
Insertion Loss		0.8	1.0	dB
Insertion Loss Temperature Coefficient		0.003		dB/ ° C
Isolation	80	85		dB
Input VSWR		1.3	1.5	: 1
Output VSWR		1.3	1.5	: 1
RF Input Power (CW)			30	dBm
DC Power Dissipation		0.3		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed	100			ns
Weight	0.71			ounces
Impedance	50			Ω
Bias Current (+5V/-5V)	60/50			mA
Input / Output Connectors	SMA-Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			



Absolute Maximum Ratings

Biasing	+5V $\pm$ 10%/-5V $\pm$ 10%
---------	-----------------------------

Ordering Information


Part No.	Description
DBSA0201000200A	SP2T1-2GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


Outline Drawing:

All Dimensions in mm (inches)

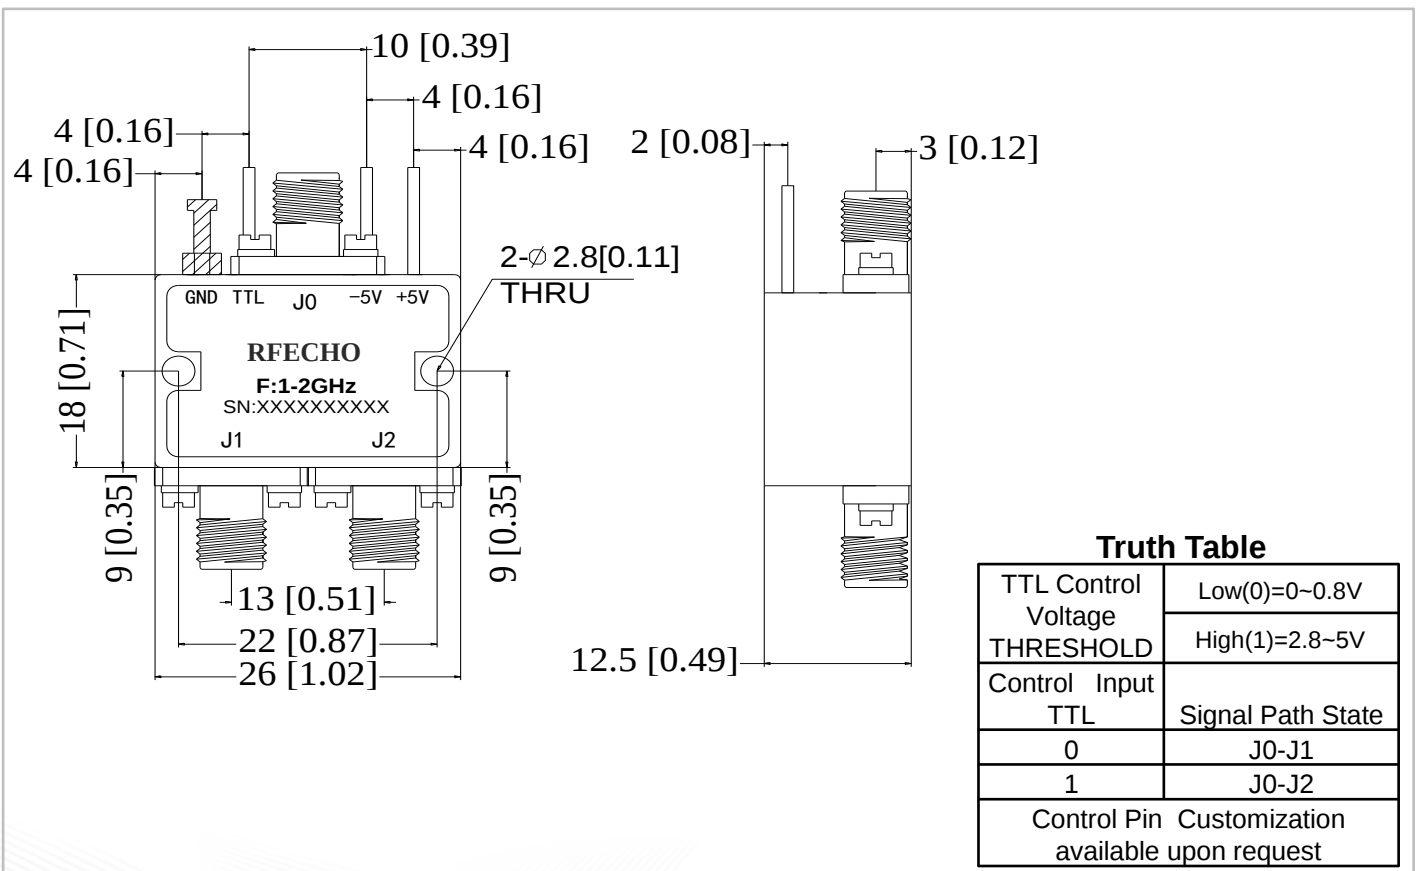





Insertion Loss

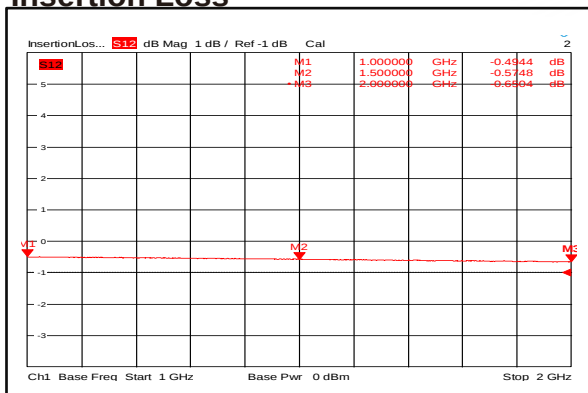


Input VSWR

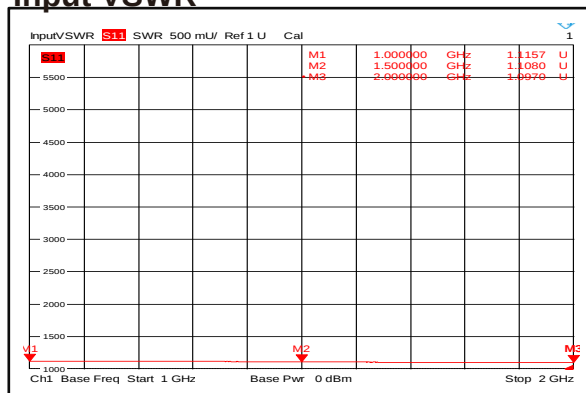


Output VSWR

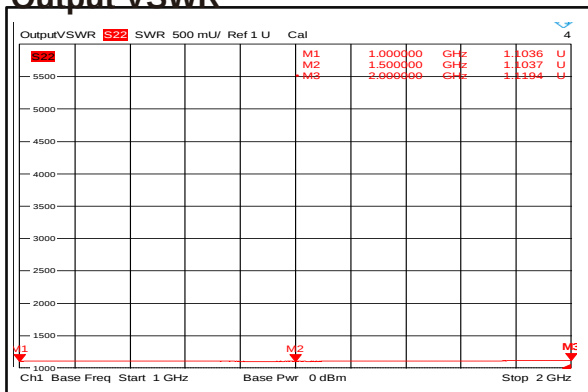

Isolation

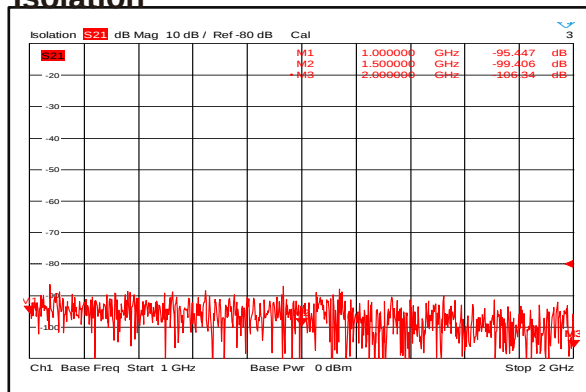

Switching Speed

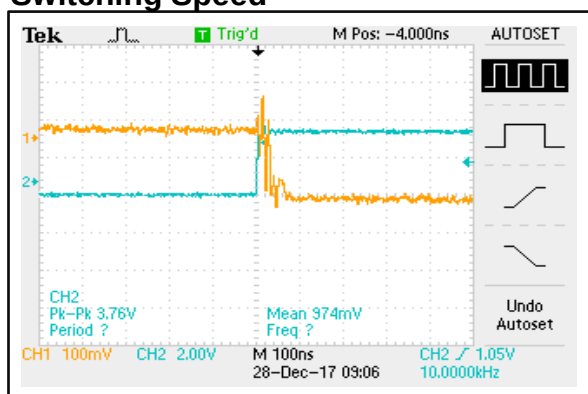

Switching Speed

