


Absorptive 1-18GHz Coaxial SP4T Switch

Features

- Ultra Wide Band Operation 1-18GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	1~6			6~12			12~18			GHz
Insertion Loss		1.8	2		2.7	3		3.2	3.5	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ °C
Isolation	70	75		70	75		60	65		dB
Input VSWR		1.6	2		1.6	2		1.6	2	: 1
Output VSWR		1.6	2		1.5	2		1.5	2	: 1
RF Input power (CW)	1			1			1			W
Power Dissipation (CW)		0.3			0.4			0.5		W
0.1dB Compression P0.1dB		30			30			30		dBm
IM3		40			40			40		dBc
IIP3		50			50			50		dBm
Switching Speed	100									ns
Weight	1.23									ounces
Impedance	50									Ω
Biasing(+5V/-5V)	160/50									mA
Input /Output Connectors	SMA-Female (Standard)									
Finish	Gold Plated									
Material	Aluminum									
Seal	Hermetically Sealed (optional)									



Absolute Maximum Ratings

Biasing	+5V ± 10%/-5V ± 10%
---------	---------------------

Ordering Information

Part No.	Description
DBSA0401001800A	SP4T 1-18GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C ~ +85°C (Case Temperature)
Storage Temperature	-50°C ~ +105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)


Truth Table

TTL Control Voltage THRESHOLD				Low(0)=0~0.8V
				High(1)=2.8~5V
Control Input TTL			Signal Path State	
C4	C3	C2		C1
0	0	0	0	NC
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4
1	1	1	1	OFF


Control Pin Customization available upon request




Insertion Loss

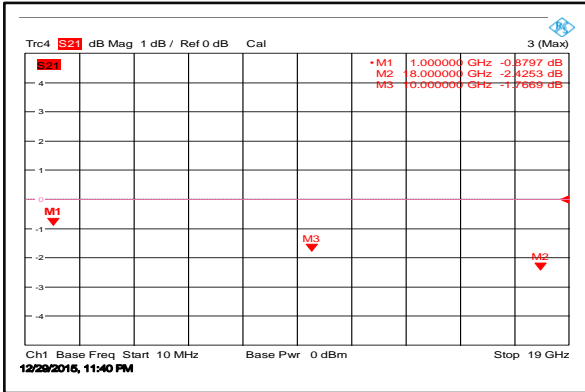


Input VSWR

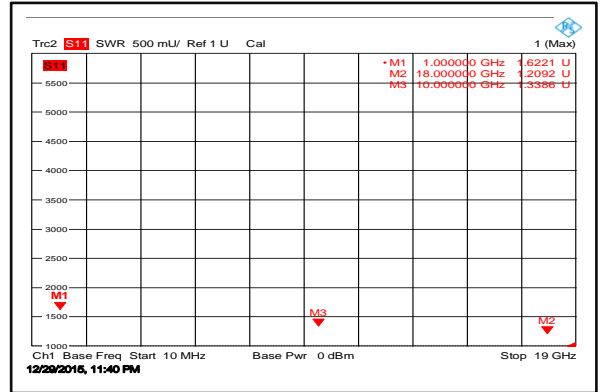


Output VSWR

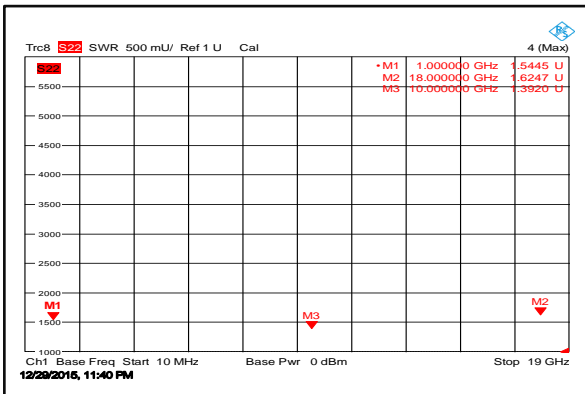

Isolation

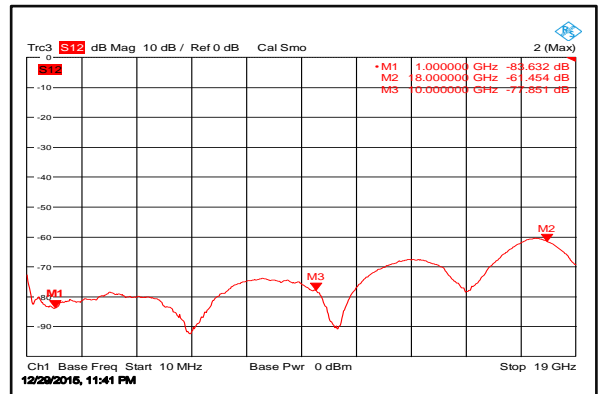

Turn on Switching Speed

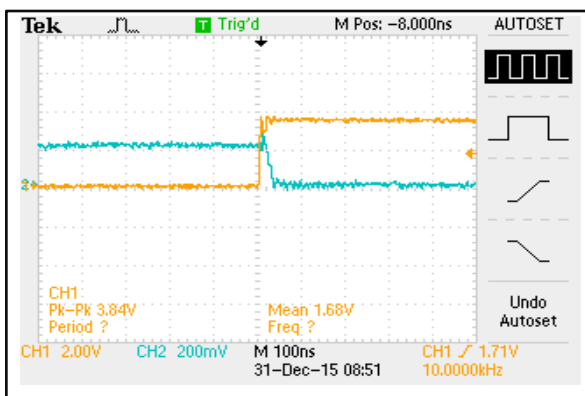

Turn off Switching Speed

