


Reflective 1-2GHz Coaxial SP4T Switch

Features

- Wide Band Operation 1-2GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Units
Frequency Range		1-2		GHz
Insertion Loss		0.6	1.0	dB
Insertion Loss Temperature Coefficient		0.003		dB/ °C
Isolation	80	85		dB
Input VSWR		1.25	1.5	: 1
Output VSWR		1.25	1.5	: 1
RF Input power (CW)			30	dBm
DC Power Dissipation		0.8		W
0.1dB Compression Point(P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed		100		ns
Weight		1.06		ounces
Impedance		50		Ω
Bias Current (+5V / -5V)		150/50		mA
Input / Output Connectors		SMA-Female		
Finish		Gold Plated		
Material		Aluminum		
Sealing		Hermetically Sealed (optional)		



Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
---------	-----------------

Ordering Information


Part No.	Description
DBSR0401000200A	SP4T 1-2GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)

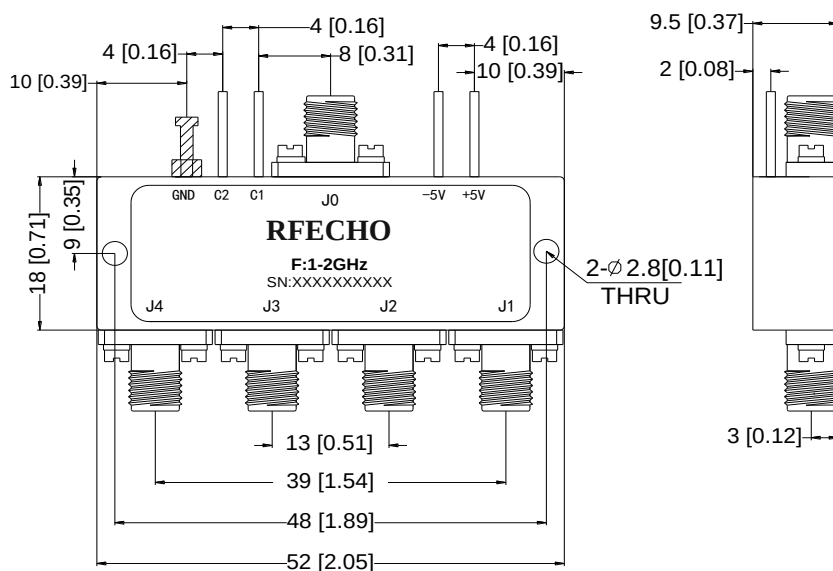


Truth Table


TTL Control Voltage THRESHOLD	Low(0)=0~0.8V	
	High(1)=2.8~5V	
Control Input TTL		Signal Path State
C2	C1	
0	0	J0-J1
0	1	J0-J2
1	0	J0-J3
1	1	J0-J4
Control Pin Customization available upon request		




Insertion Loss @+25°C

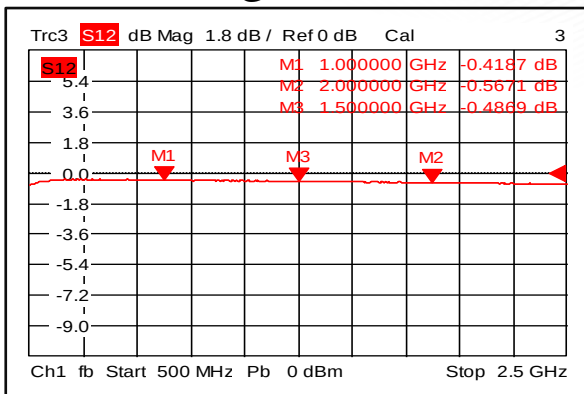


Input VSWR @+25°C

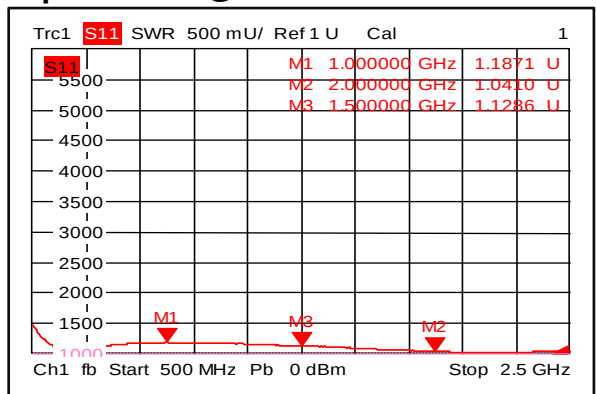


Output VSWR @+25°C

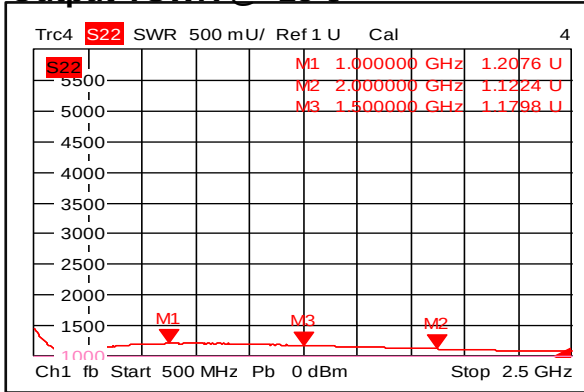


Isolation @+25°C

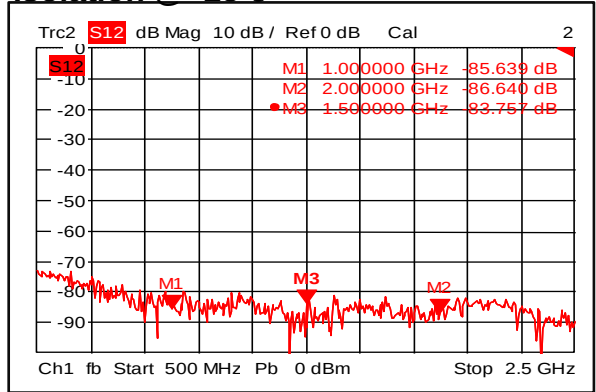


Insertion Loss @-40°C

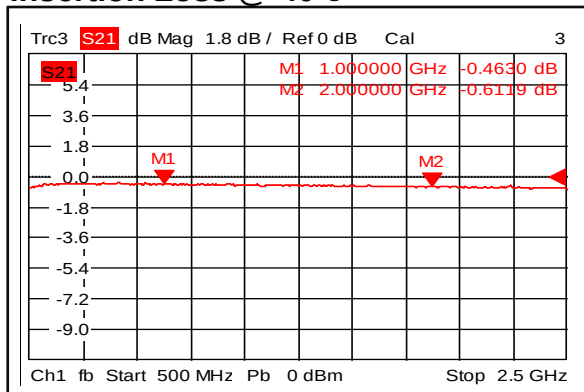


Input VSWR @-40°C

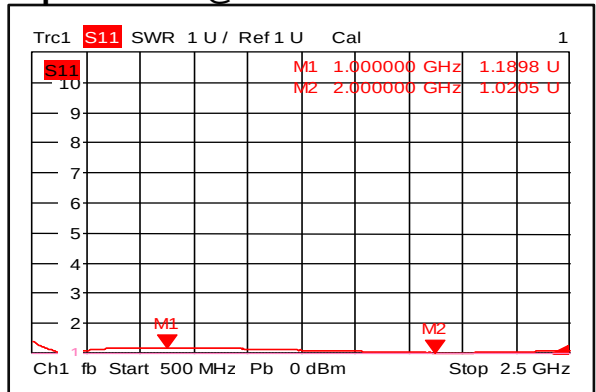

Output VSWR @-40°C

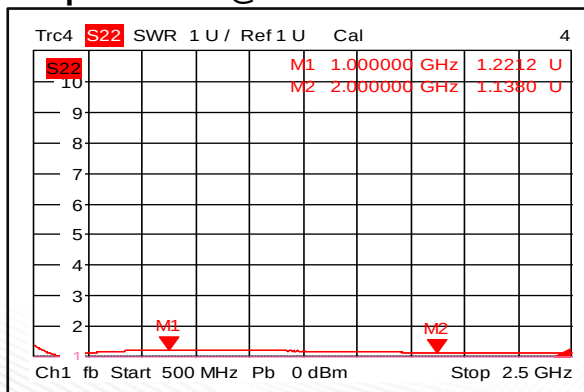


Isolation @-40°C

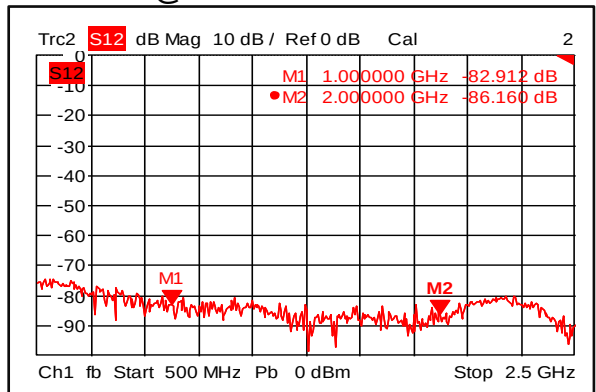





Insertion Loss @+85°C

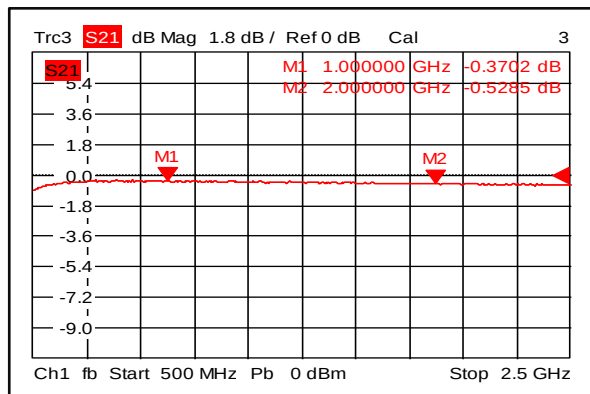


Input VSWR @+85°C

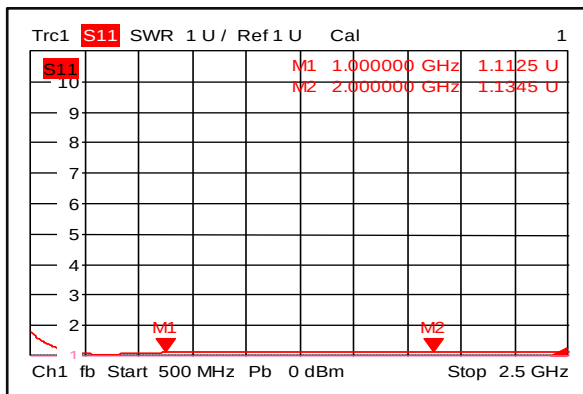


Output VSWR @+85°C

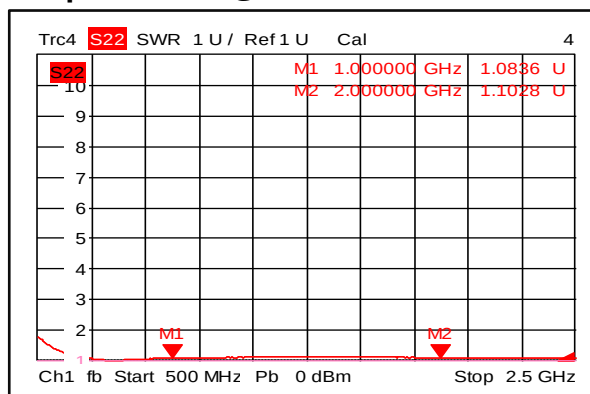

Isolation @+85°C

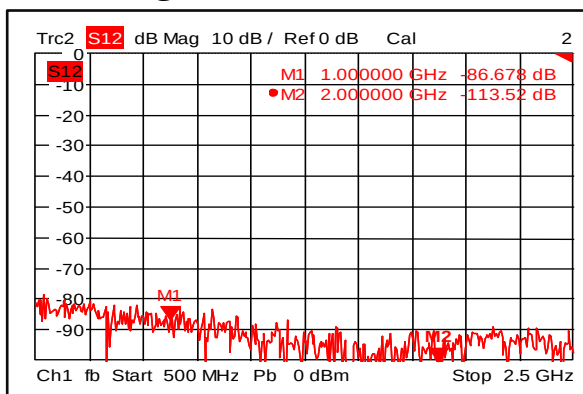

Switching Speed

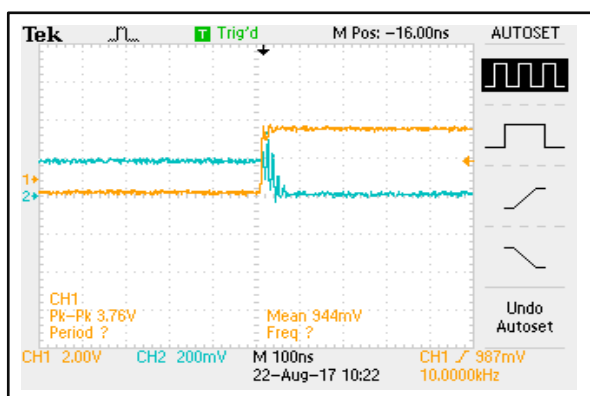

Switching Speed

