




# Reflective 2-4GHz Coaxial SP2T Switch

## Features

- Wide Band Operation 2-4GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

| Parameters                             | Min                              | Typ.  | Max | Units    |
|----------------------------------------|----------------------------------|-------|-----|----------|
| Frequency Range                        | 2-4                              |       |     | GHz      |
| Insertion Loss                         |                                  | 0.8   | 1.2 | dB       |
| Insertion Loss Temperature Coefficient |                                  | 0.003 |     | dB/ ° C  |
| Isolation                              | 45                               | 52    |     | dB       |
| Input VSWR                             |                                  | 1.2   | 1.5 | : 1      |
| Output VSWR                            |                                  | 1.2   | 1.5 | : 1      |
| RF Input power (CW)                    |                                  |       | 15  | W        |
| DC Power Dissipation                   |                                  | 0.5   |     | W        |
| 0.1dB Compression Point (P0.1dB)       |                                  | 42    |     | dBm      |
| IIP3                                   |                                  | 50    |     | dBm      |
| Switching Speed                        |                                  |       | 500 | ns       |
| Weight                                 | 6.0                              |       |     | ounces   |
| Impedance                              | 50                               |       |     | $\Omega$ |
| Bias Current (+5V / -28V)              | 70/40                            |       |     | mA       |
| Input / Output Connectors              | N-Female                         |       |     |          |
| Finish                                 | Nickel plated                    |       |     |          |
| Material                               | Aluminum                         |       |     |          |
| Sealing                                | Hermetically Sealed ( optional ) |       |     |          |



## Absolute Maximum Ratings

|         |                              |
|---------|------------------------------|
| Biasing | $+5V \pm 10\%/-28V \pm 10\%$ |
|---------|------------------------------|

## Ordering Information


| Part No.        | Description                  |
|-----------------|------------------------------|
| DBSR0202000400B | SP2T 2-4GHz PIN Diode Switch |

## Environmental Specifications

|                         |                                                                                  |
|-------------------------|----------------------------------------------------------------------------------|
| Operational Temperature | -40°C~+60°C                                                                      |
| Storage Temperature     | -50°C~+105°C                                                                     |
| Altitude                | 30,000 ft. (Epoxy Sealed Controlled environment)                                 |
|                         | 60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional) |
| Vibration               | 25g RMS (15 degrees 2KHz) endurance, 1 hour per axis                             |
| Humidity                | 100% RH at 35°C, 95%RH at 40°C                                                   |
| Shock                   | 20G for 11msec half sine wave, 3 axis both directions                            |


## Outline Drawing:

All Dimensions in mm (inches)

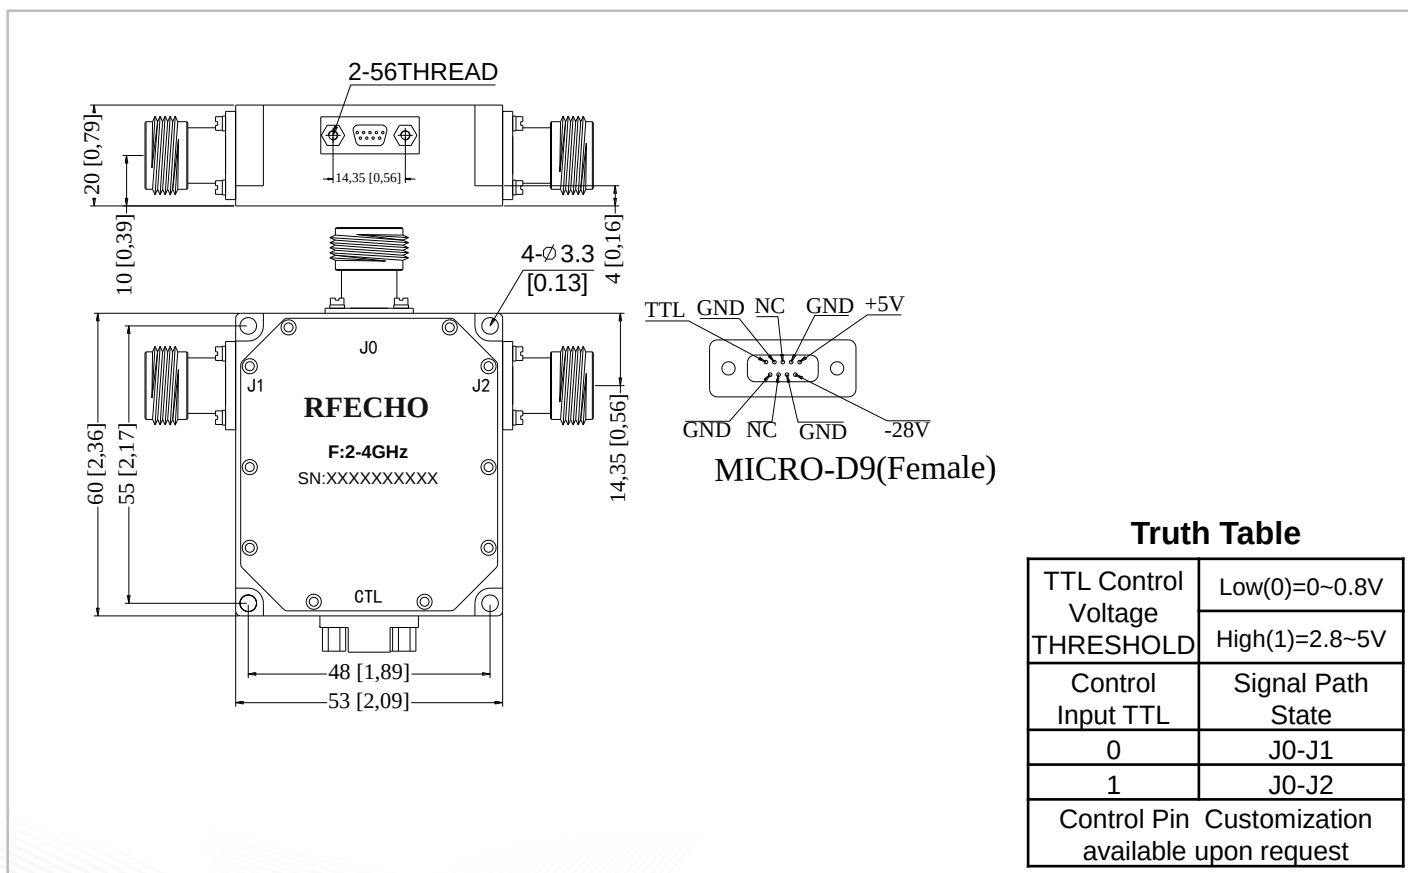





### Insertion Loss @+25°C

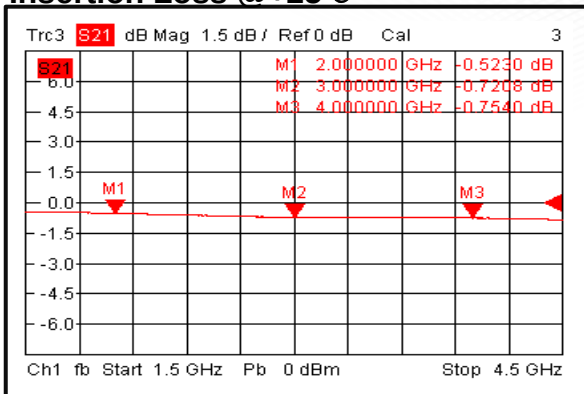


### Input VSWR @+25°C

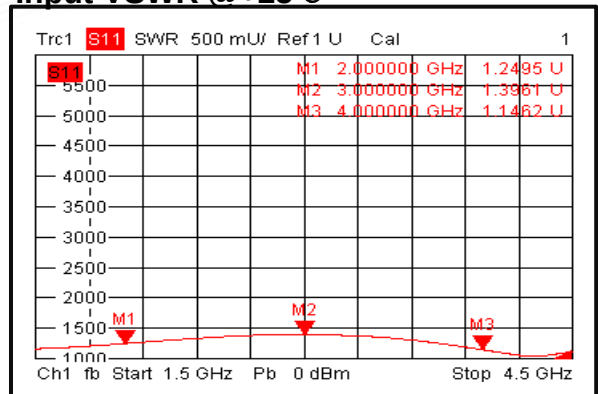


### Output VSWR @+25°C

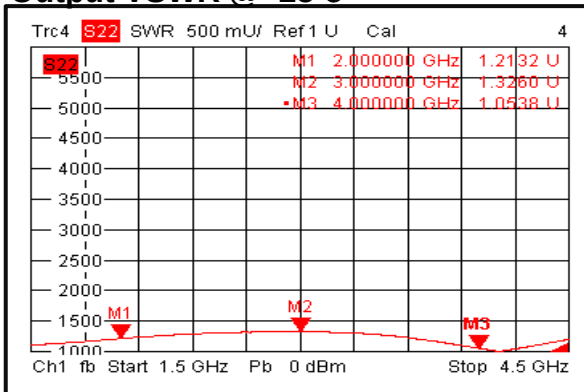


### Isolation @+25°C

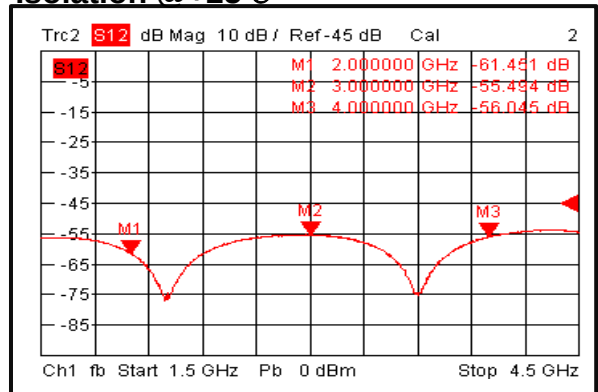


### Insertion Loss @-40°C

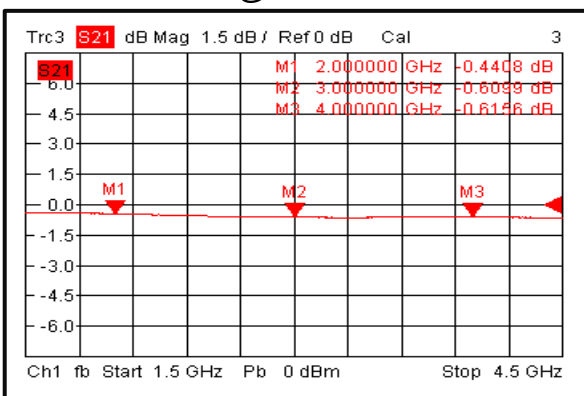


### Input VSWR @-40°C

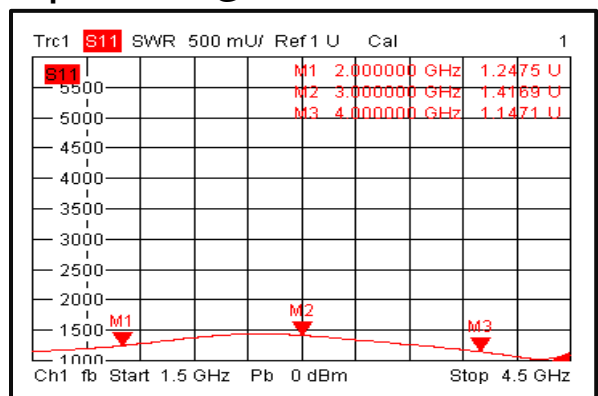

### Output VSWR @-40°C

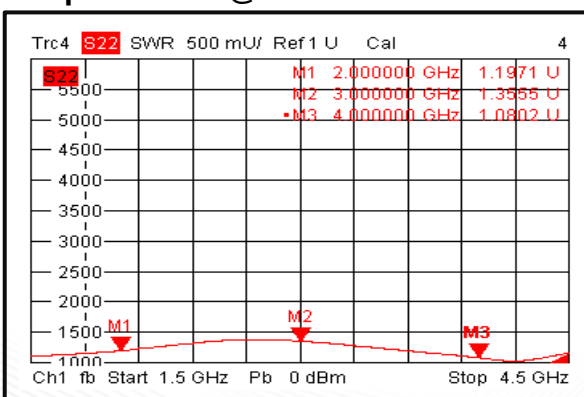


### Isolation @-40°C

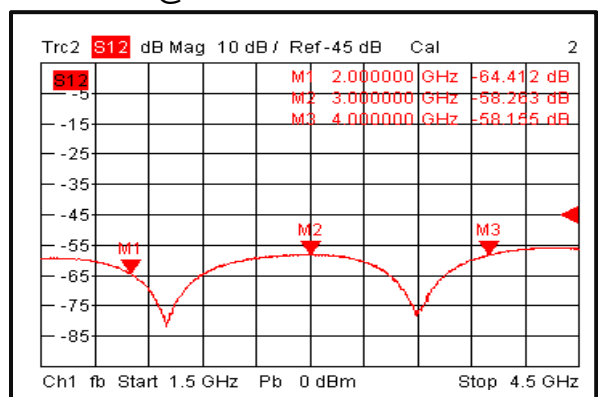





## Insertion Loss @+60°C

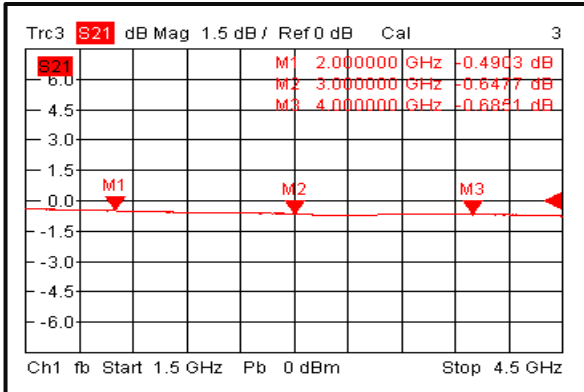


## Input VSWR @+60°C

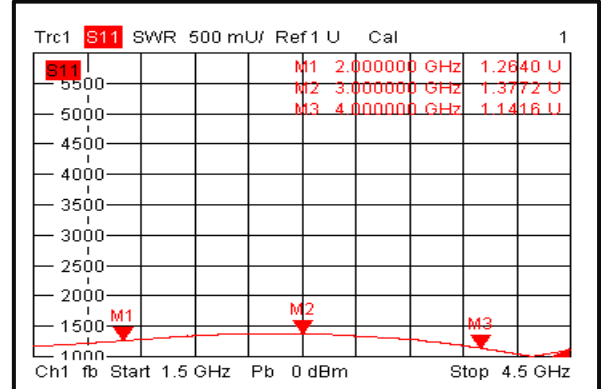


## Output VSWR @+60°C

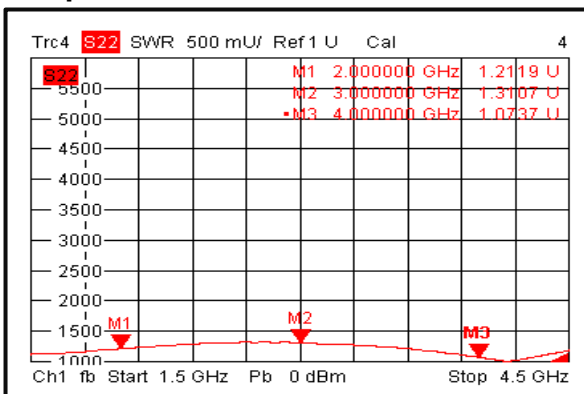

## Isolation @+60°C

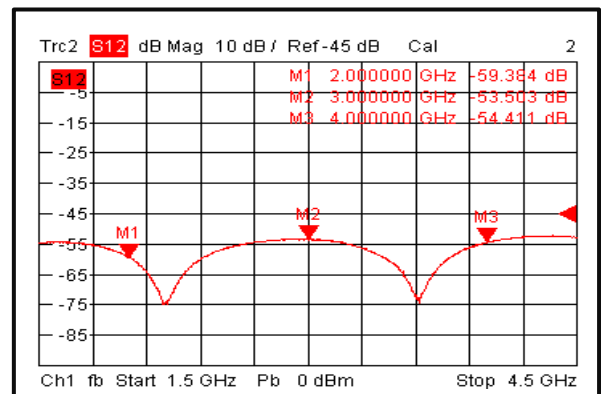

## Switching Speed

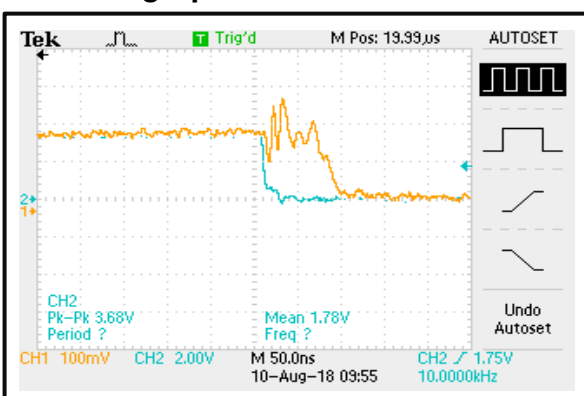

## Switching Speed

