




Absorptive Coaxial SP8T Switch 2 - 50GHz

Features

- Ultra Wide Band Operation 2-50GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
 - Military & Aerospace
 - Fiber Optics
- RF Microwave & VSAT
Test Instrument

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	2-18			18-43.5			43.5-50			GHz
Insertion Loss		4.8	6.5		7.3	8.5		9.2	10.0	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ ° C
Isolation	50	65		45	55		45	53		dB
Input VSWR		2	3		2.5	3		2.5	3	: 1
Output VSWR		2	3		2.5	3		2.5	3	: 1
RF Input Power (CW)			23			23			23	dBm
DC Power Dissipation		1.5			1.5			1.5		W
0.1dB Compression Point (P0.1dB)		23			23			23		dBm
IIP3		43			38			33		dBm
Switching Speed	100 Max.									ns
Weight	1.8 Max.									ounces
Impedance	50									Ω
Bias Current (+5V / -5V)	200/50 Max.									mA
Input / Output Connectors	2.4mm - Female									
Finish	Gold Plated									
Material	Aluminum									
Sealing	Hermetically Sealed (Optional)									



Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10% @25°C
---------	-----------------------

Environmental Specifications

Operational Temperature	-40°C~+85°C (Case Temperature)
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Ordering Information

Part No.	ECCN	Description
DBSA0802005000A	EAR99	SP8T 2-50GHz PIN Diode Switch

Outline Drawing:


All Dimensions in mm (inches)

TTL Control Voltage THRESHOLD			Low(0)=0~0.8V	High(1)=2.8~5V
Control Input TTL			Signal Path State	
C3	C2	C1		
0	0	0	J0-J1	
0	0	1	J0-J2	
0	1	0	J0-J3	
0	1	1	J0-J4	
1	0	0	J0-J5	
1	0	1	J0-J6	
1	1	0	J0-J7	
1	1	1	J0-J8	


Control Pin Customization available upon request




Insertion Loss @+25°C

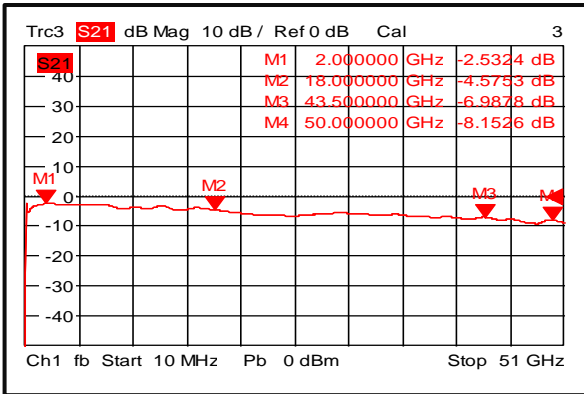


Input VSWR @+25°C

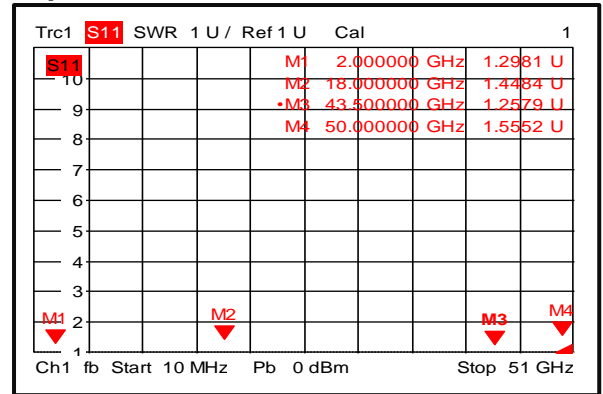


Output VSWR @+25°C

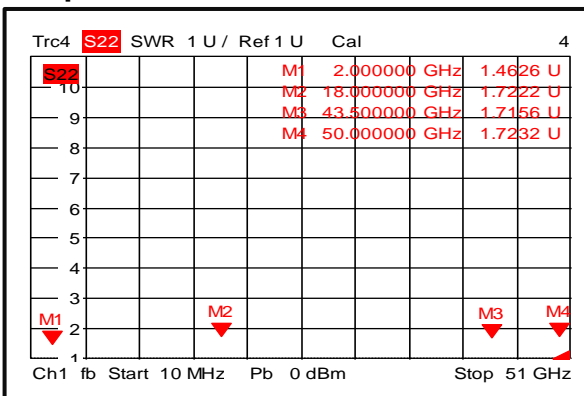


Isolation @+25°C

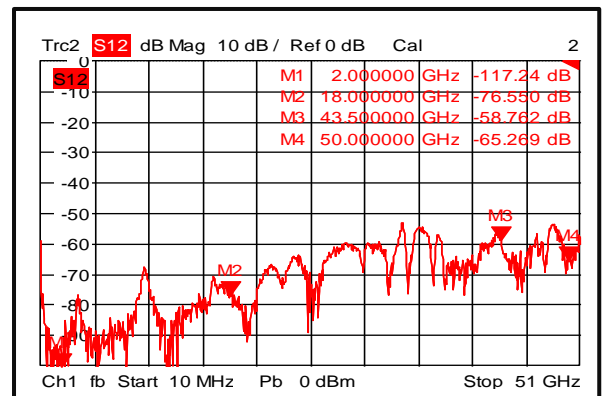

Insertion Loss @-40°C

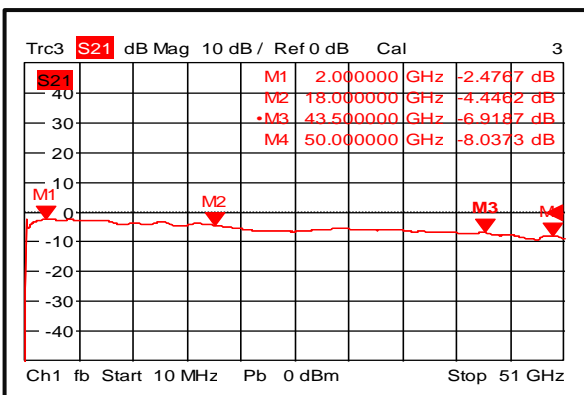


Input VSWR @-40°C

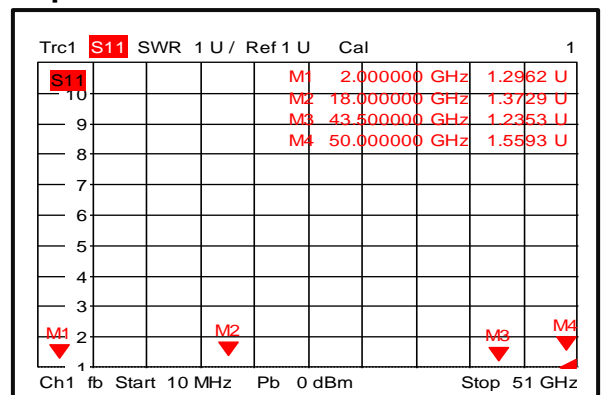





Output VSWR @-40°C

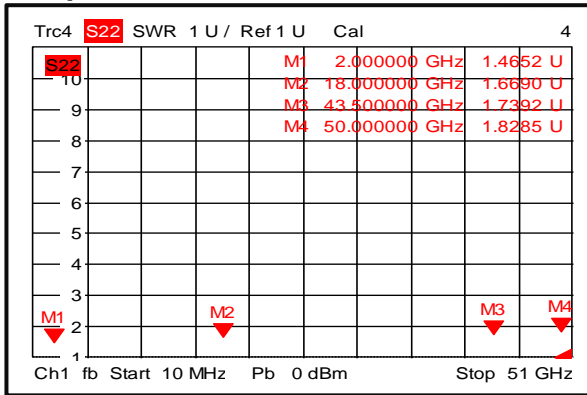


Isolation @-40°C

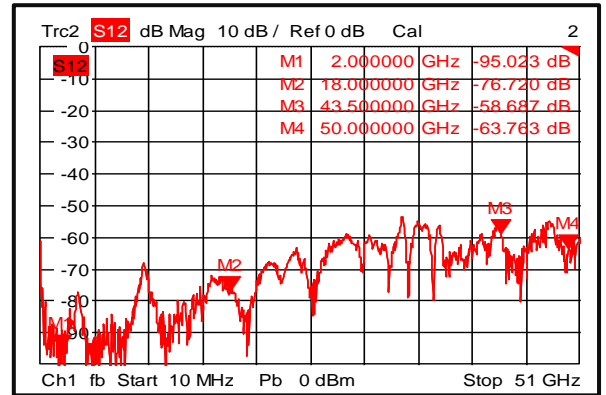


Insertion Loss @+85°C

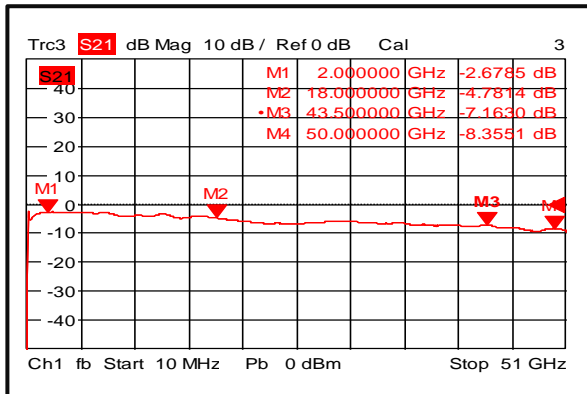


Input VSWR @+85°C

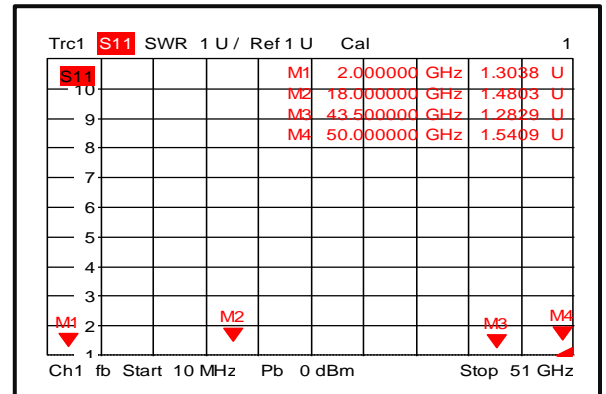

Output VSWR @+85°C

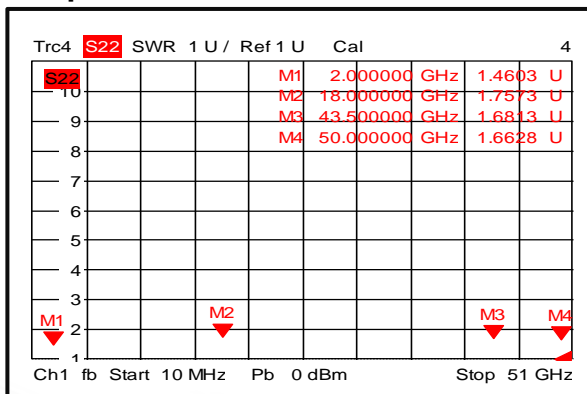


Isolation @+85°C

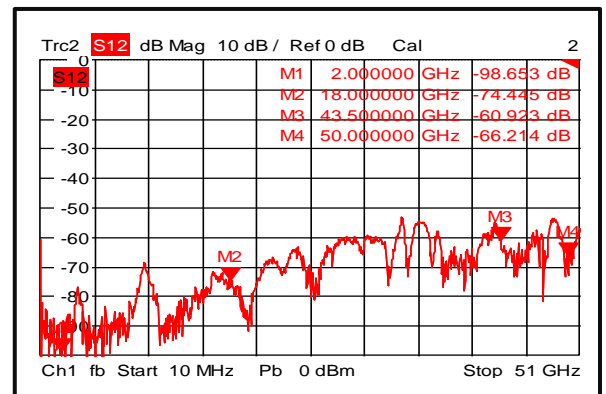





Insertion Loss Temperature Coefficient

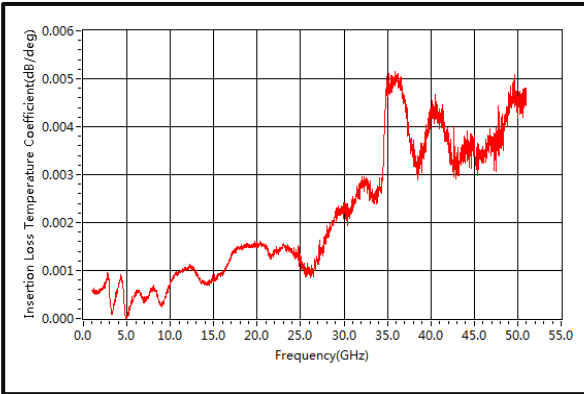


Insertion Loss vs. Temperature

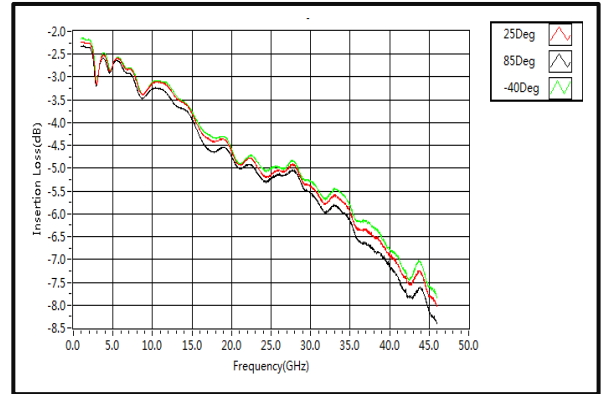

IIP3

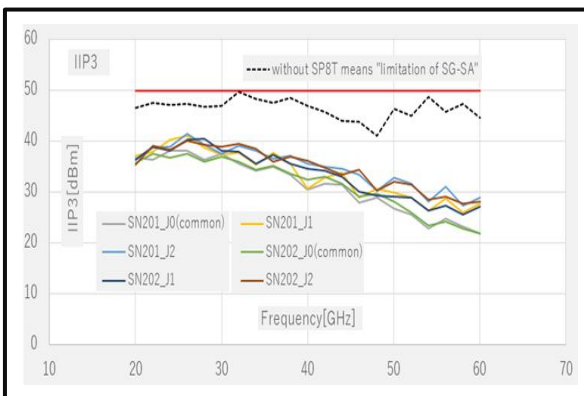

Switching Speed

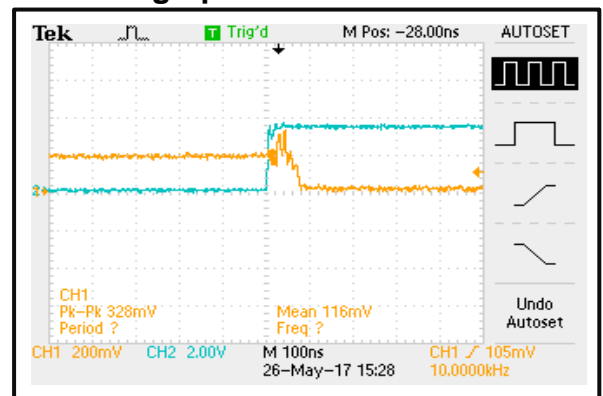

Switching Speed

