




Absorptive 2-4GHz Coaxial SP3T Switch

Features

- Wide Band Operation 2-4GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request

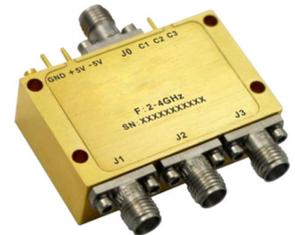

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Units
Frequency Range	2-4			GHz
Insertion Loss		1.0	1.5	dB
Insertion Loss Temperature Coefficient		0.003		dB/ ° C
Isolation	80	85		dB
Input VSWR		1.3	1.5	: 1
Output VSWR		1.3	1.5	: 1
RF Input Power			30	dBm
DC Power Dissipation		0.6		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed		80	100	ns
Weight	1.06			ounces
Impedance	50			Ω
Bias Current (+5V / -5V)	120/50			mA
Input / Output Connectors	SMA-Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			



Absolute Maximum Ratings

Biasing	+5V ± 10%/-5V ± 10%
---------	---------------------

Ordering Information

Part No.	Description
DBSA0302000400A	SP3T 2-4GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)


The drawing shows a top view and a side view of the RFECHO SP3T 2-4GHz PIN Diode Switch. The top view includes dimensions for pin spacing and overall size. The side view shows the component's height and mounting features. The truth table defines the control pin logic for the signal path state.

TTL Control Voltage THRESHOLD		Signal Path State	
Control Input TTL		Signal Path State	
C1	C2	C3	Signal Path State
0	0	0	NC
0	1	1	J0-J1
1	0	1	J0-J2
1	1	0	J0-J3
1	1	1	OFF


Control Pin Customization available upon request




Insertion Loss @+25°C

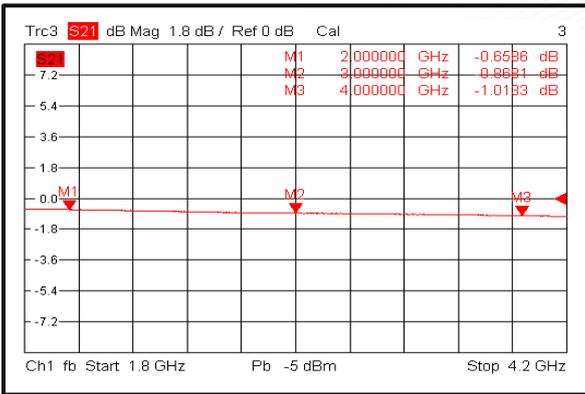


Input VSWR @+25°C

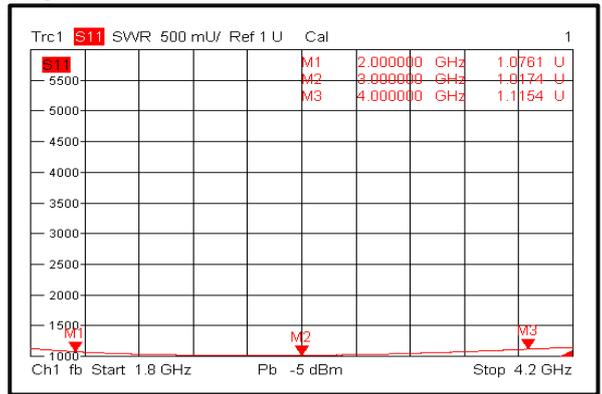


Output VSWR @+25°C

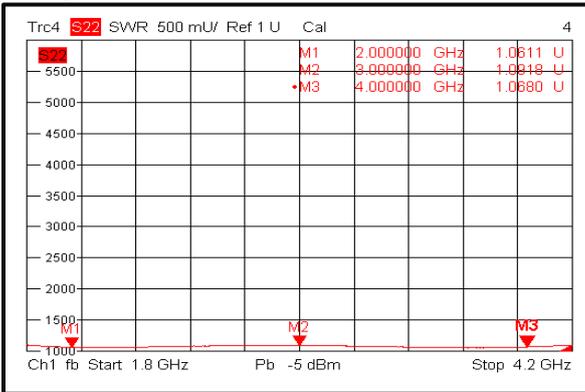


Isolation @+25°C

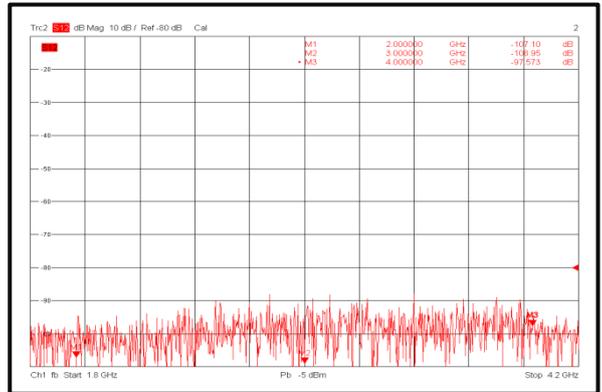


Insertion Loss @-40°C

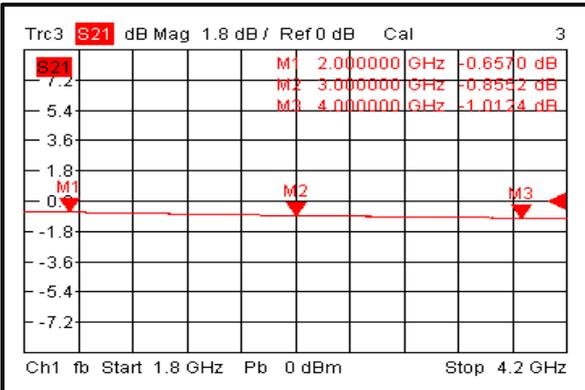


Input VSWR @-40°C

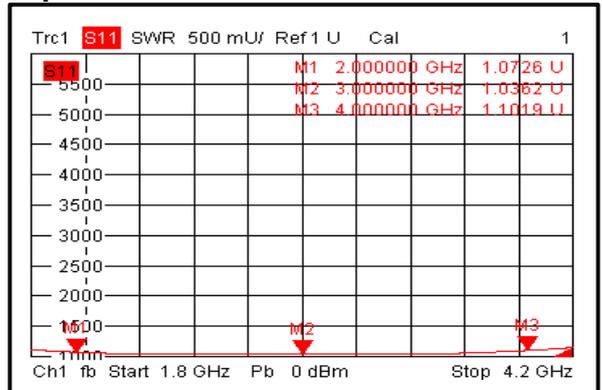

Output VSWR @-40°C

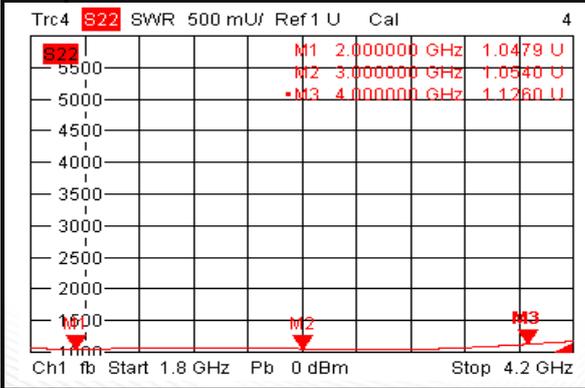


Isolation @-40°C

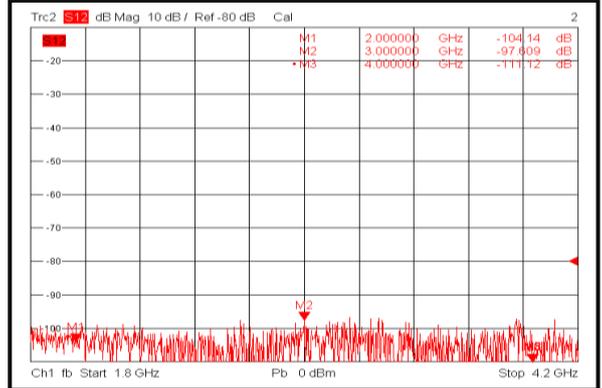





Insertion Loss @+85°C

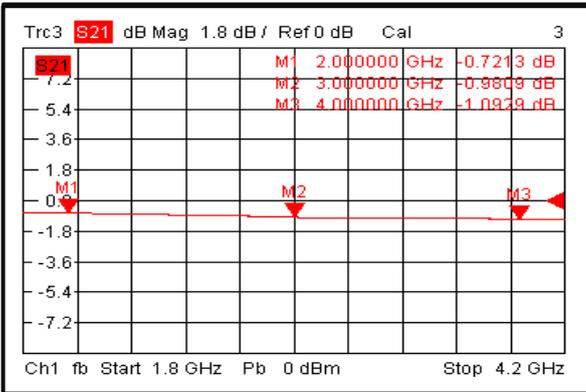


Input VSWR @+85°C

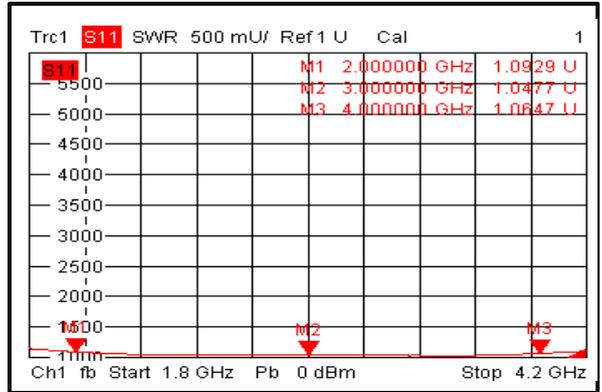


Output VSWR @+85°C

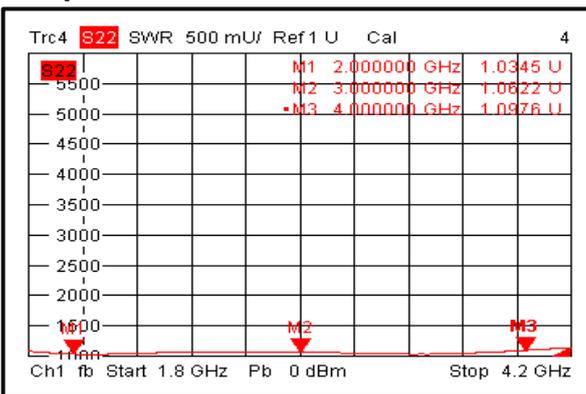

Isolation @+85°C

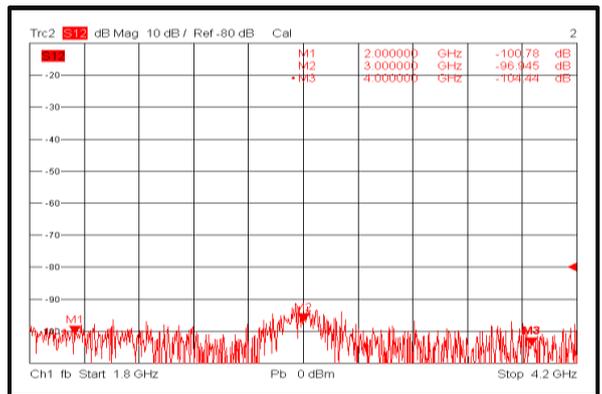

Switching Speed

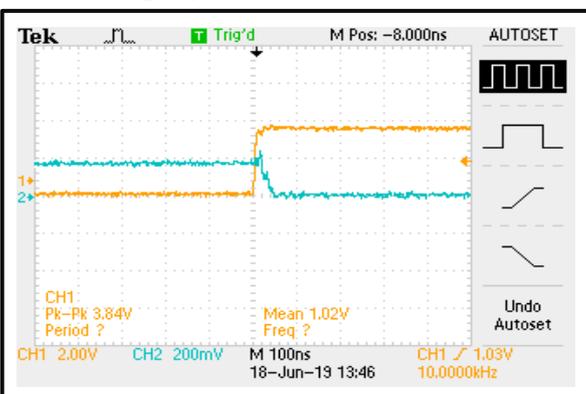

Switching Speed

