



Absorptive 4-8GHz Coaxial SP2T Switch

Features

- Wide Band Operation 4-8GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min.	Typ.	Max.	Units
Frequency Range	4-8			GHz
Insertion Loss		1.3	1.5	dB
Insertion Loss Temperature Coefficient		0.003		dB/ °C
Isolation	80	85		dB
Input VSWR		1.2	1.5	: 1
Output VSWR		1.3	1.5	: 1
RF Input Power (CW)			30	dBm
DC Power Dissipation		0.5		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed	100			ns
Weight	0.65			ounces
Impedance	50			Ω
Bias Current (+5V/-5V)	80/50			mA
Input / Output Connectors	SMA - Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (optional)			



Absolute Maximum Ratings

Biasing	+5V $\pm$ 10%/-5V $\pm$ 10%
---------	-----------------------------

Ordering Information


Part No.	Description
DBSA0204000800D	SP2T 4-8GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


Outline Drawing:

All Dimensions in mm (inches) Tolerance +/- 0.1 (0.004)

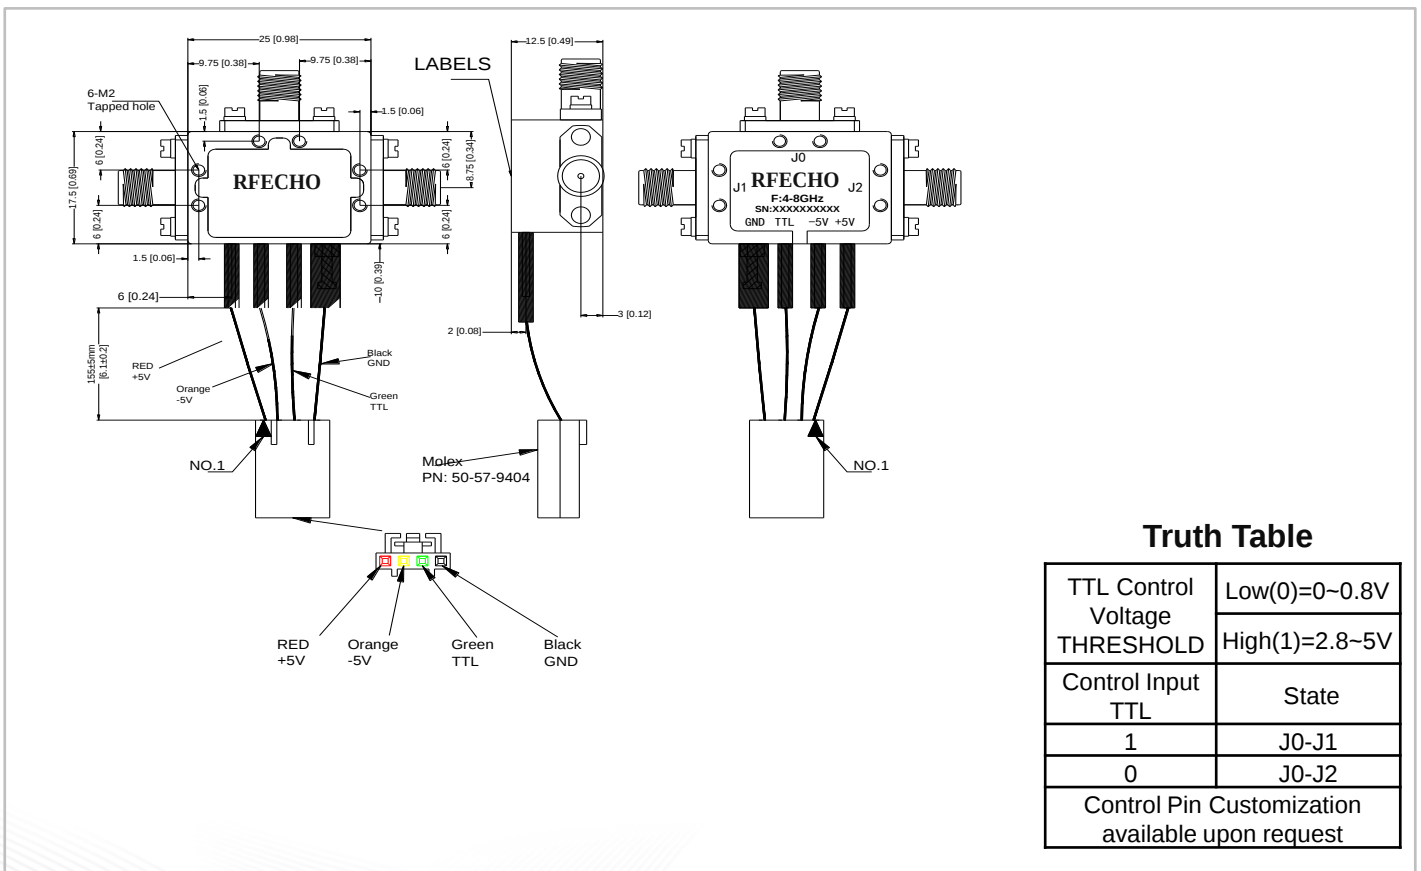





Insertion Loss

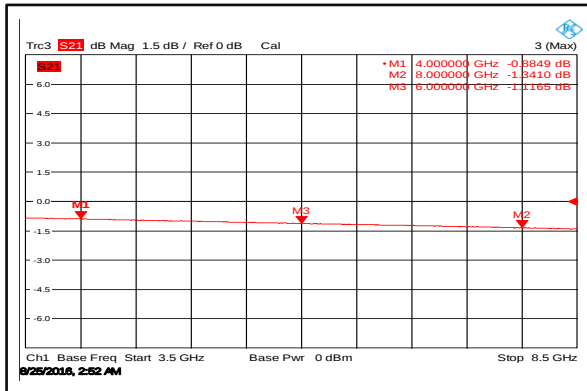


Input VSWR

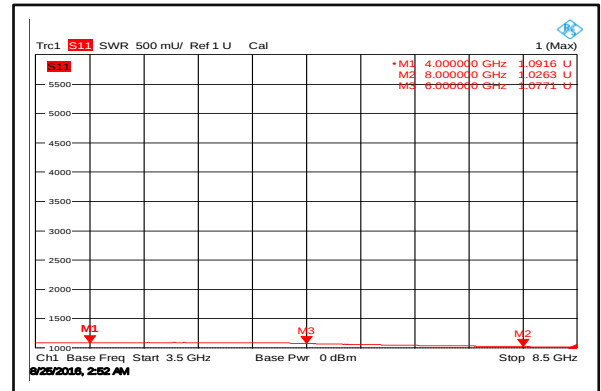


Output VSWR

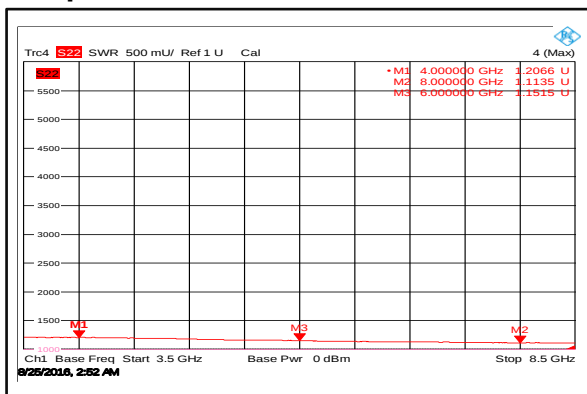

Isolation

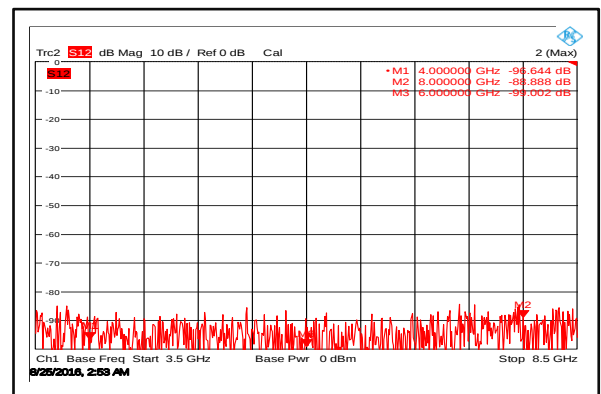

Turn on Switching Speed

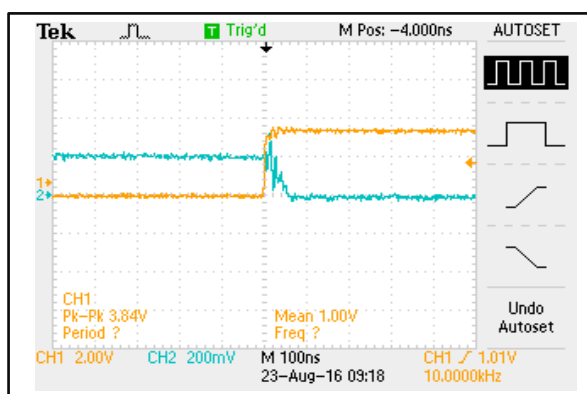

Turn off Switching Speed

