

Absorptive 5-8GHz Coaxial SP2T Switch

Features

- Wide Band Operation 5-8GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Units
Frequency Range		5-8		GHz
Insertion Loss		1.2	1.5	dB
Insertion Loss Temperature Coefficient		0.003		dB/ °C
Isolation	65	75		dB
Input VSWR		1.4	1.8	: 1
Output VSWR		1.4	1.8	: 1
RF Input power (CW)			30	dBm
DC Power Dissipation (CW)		3		W
0.1dB Compression P0.1dB		30		dBm
IIP3		55		dBm
Switching Speed		60	100	ns
Biasing(+28V)			150	mA
Weight	2.82			ounces
Impedance	50			Ω
Input /Output Connectors	SMA-Female			
Finish	Chromate Finish Aluminum			
Material	Aluminum			
Seal	Hermetically Sealed (optional)			

Absolute Maximum Ratings

Biasing	+28V ± 10%
---------	------------

Environmental Specifications


Operational Temperature	-40°C ~ +85°C
Storage Temperature	-50°C ~ +105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment) 60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Ordering Information

Part No.	Description
DBSA0205000800A	SP2T 5-8GHz PIN Diode Switch

Outline Drawing:


All Dimensions in mm (inches)

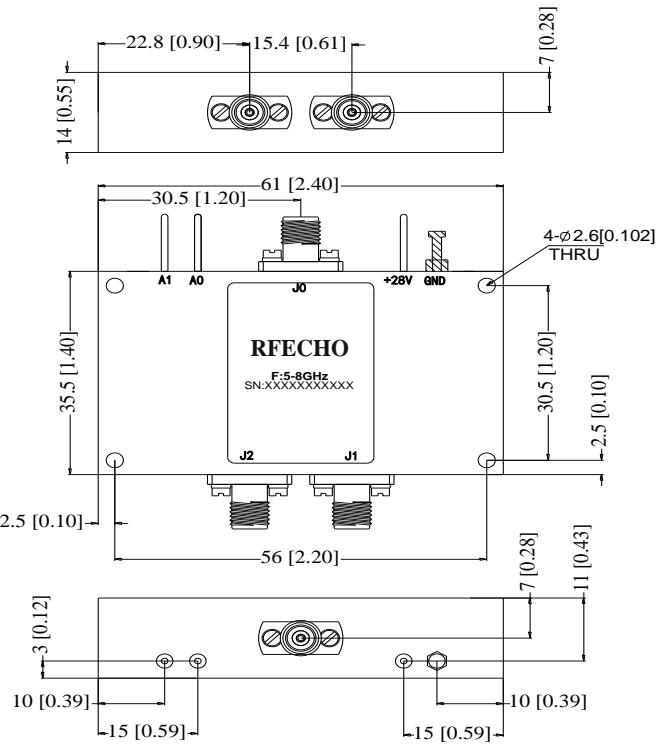


Truth Table

TTL Control Voltage THRESHOLD	Low(0)=0~0.8V	
	High(1)=2.8~5V	
Control Input TTL		Signal Path State
A0	A1	
0	1	J0-J1
1	0	J0-J2
Control Pin Customization available upon request		


Insertion Loss @+25°C

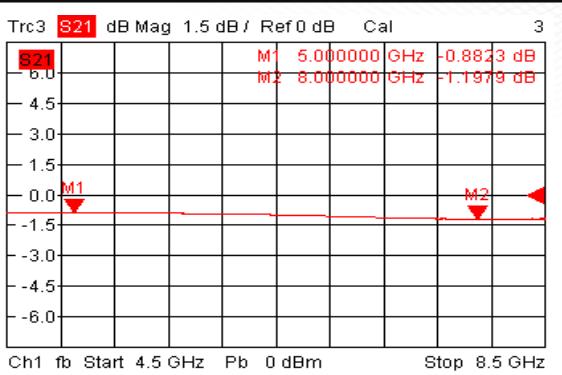


Input VSWR @+25°C

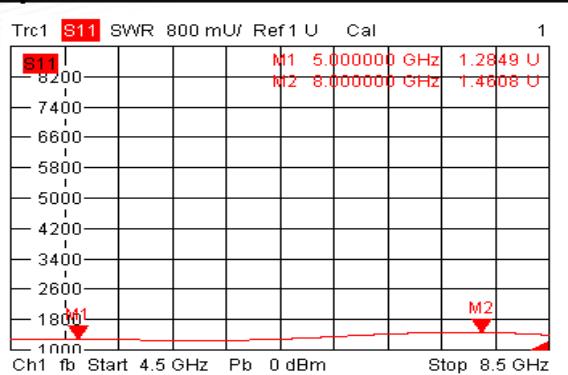


Output VSWR @+25°C

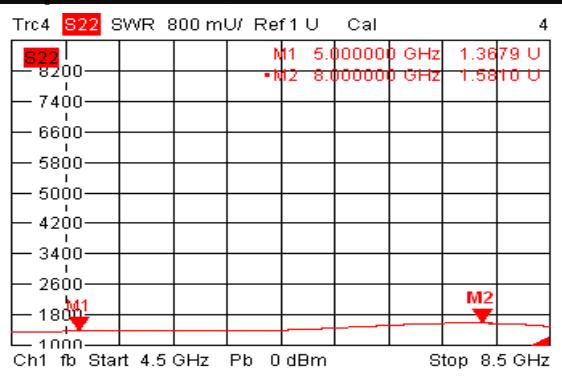


Isolation @+25°C

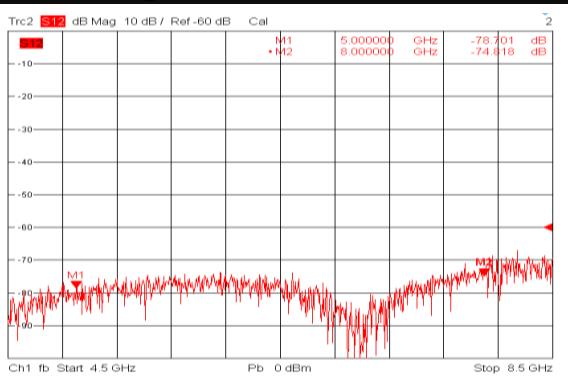


Insertion Loss @-40°C

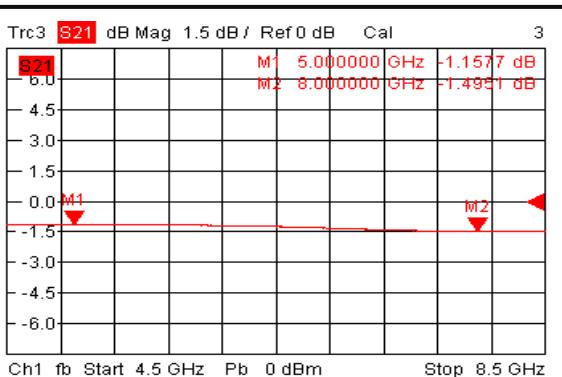


Input VSWR @-40°C

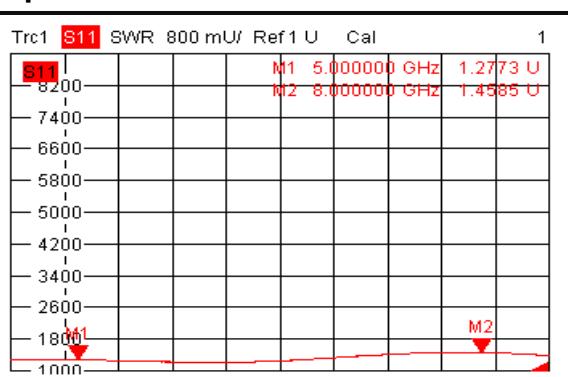


Output VSWR @-40°C

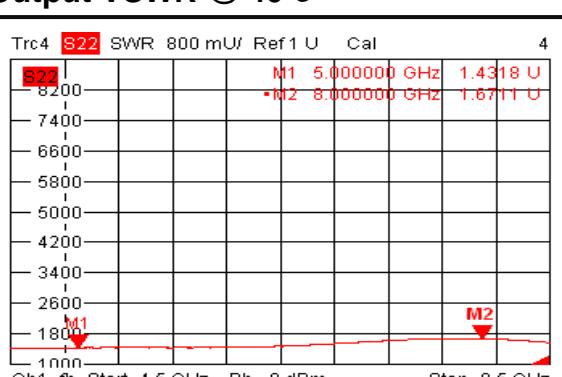


Isolation @-40°C

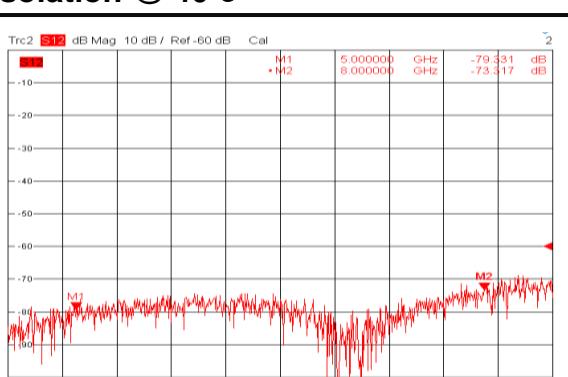


Insertion Loss @+85°C

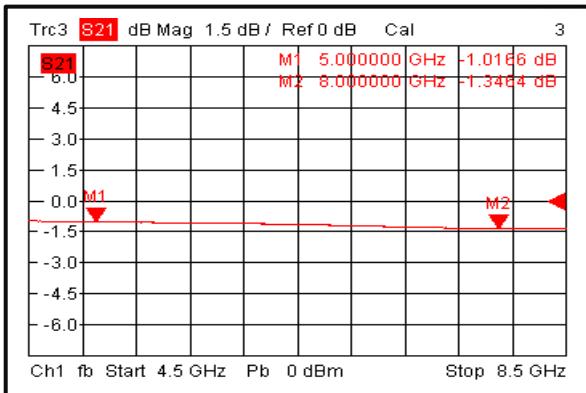


Input VSWR @+85°C

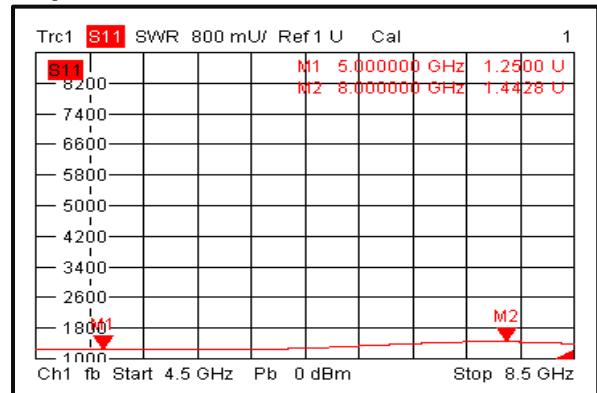


Output VSWR @+85°C

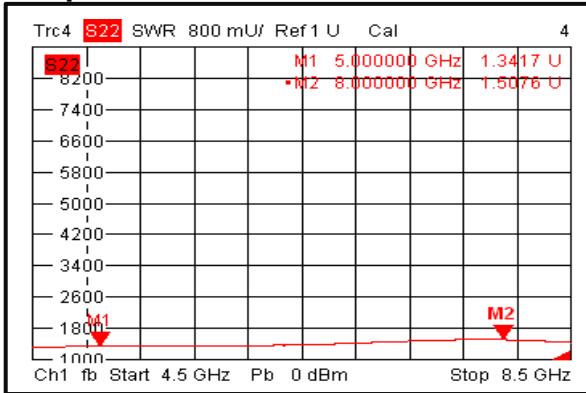

Isolation @+85°C

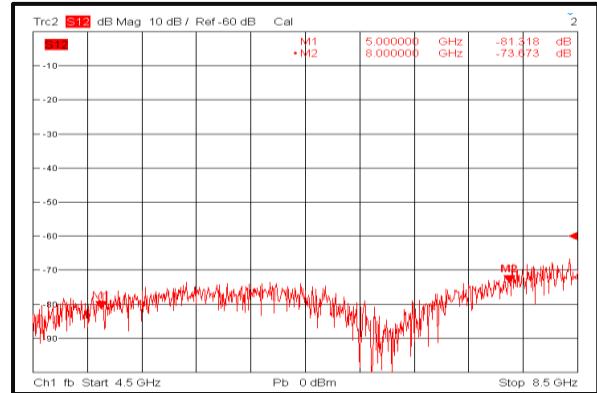

Switching Speed

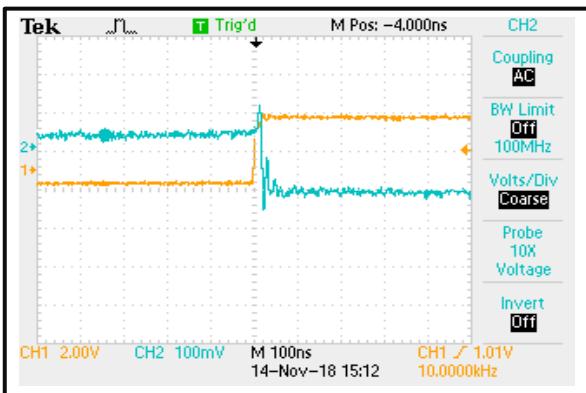

Switching Speed

