


Absorptive 6-12GHz Coaxial SP3T Switch

Features

- Wide Band Operation 6-12GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Units
Frequency Range	6-12			GHz
Insertion Loss		2.0	2.4	dB
Insertion Loss Temperature Coefficient		0.003		dB/ °C
Isolation	60	75		dB
Input VSWR		1.35	1.5	: 1
Output VSWR		1.35	1.5	: 1
RF Input power			30	dBm
DC Power Dissipation		0.6		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		43		dBm
Switching Speed	100 Max.			ns
Weight	1.5 Max.			ounces
Impedance	50			Ω
Bias Current (+5V/-5V)	120/50 Max.			mA
Input / Output Connectors	SMA-Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Epoxy Sealed (Standard) Hermetically Sealed (Optional)			



Absolute Maximum Ratings

Biassing	+5V ± 10%/-5V ± 10%
----------	---------------------

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Ordering Information

Part No.	Description
DBSA0306001200A	SP3T 6-12GHz PIN Diode Switch

Outline Drawing:


All Dimensions in mm (inches)

TTL Control Voltage THRESHOLD		Low(0)=0~0.8V High(1)=2.8~5V	
Control Input TTL			Signal Path State
C3	C2	C1	
0	0	0	Not Used
1	1	0	J0-J1
1	0	1	J0-J2
0	1	1	J0-J3
1	1	1	OFF


Control Pin Customization available upon request




Insertion Loss @+25°C

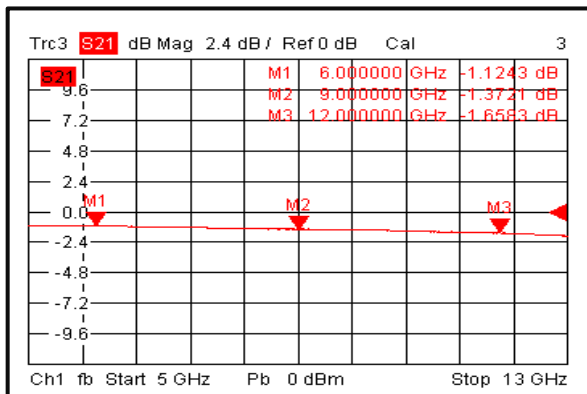


Input VSWR @+25°C

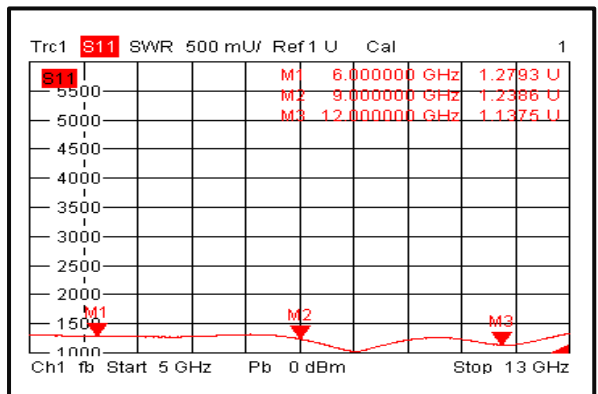


Output VSWR @+25°C

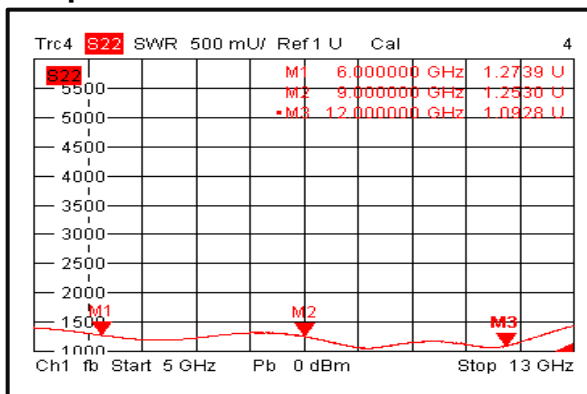


Isolation @+25°C

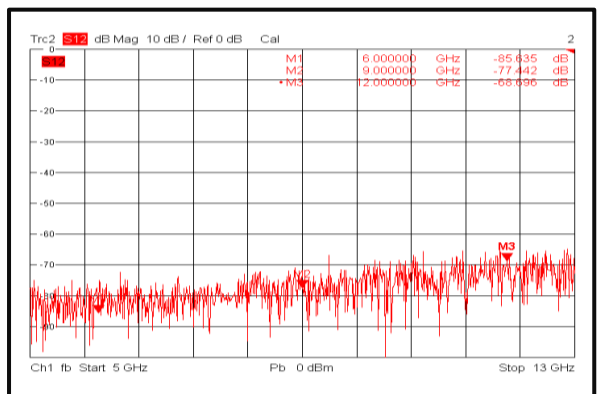

Insertion Loss @-40°C

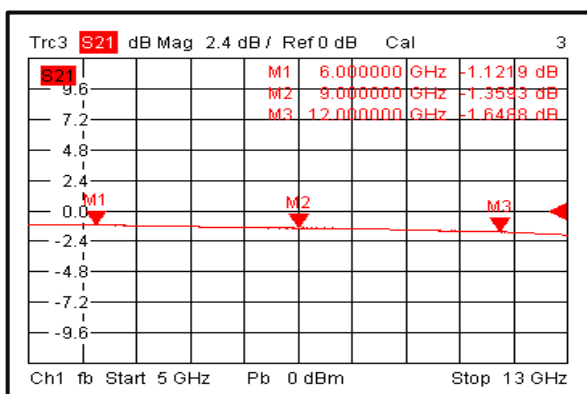


Input VSWR @-40°C

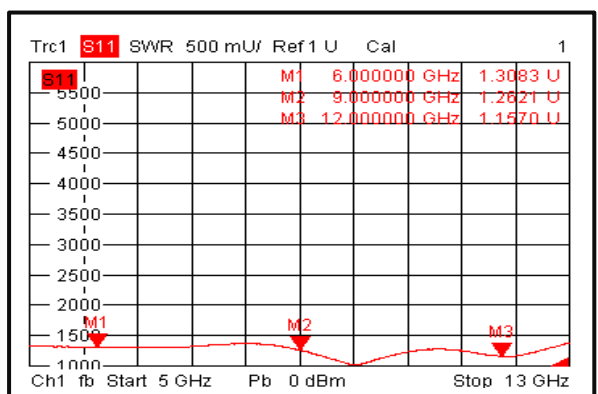





Output VSWR @-40°C

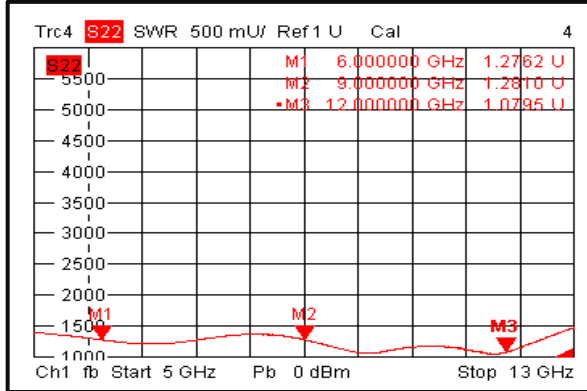


Isolation @-40°C

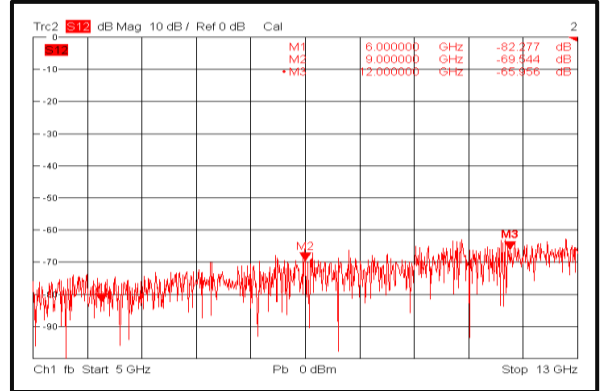


Insertion Loss @+85°C

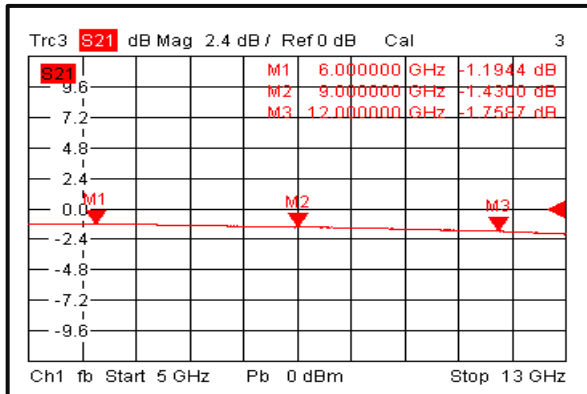


Input VSWR @+85°C

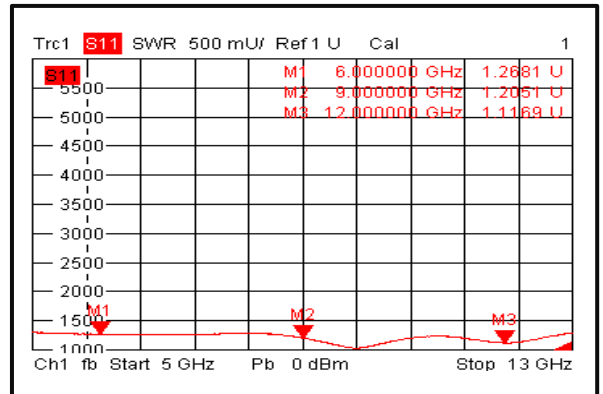


Output VSWR @+85°C

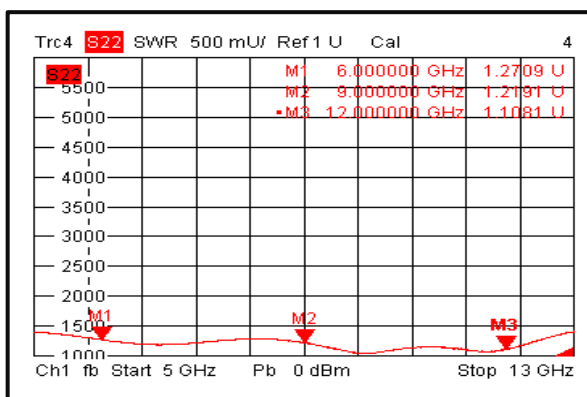


Isolation @+85°C

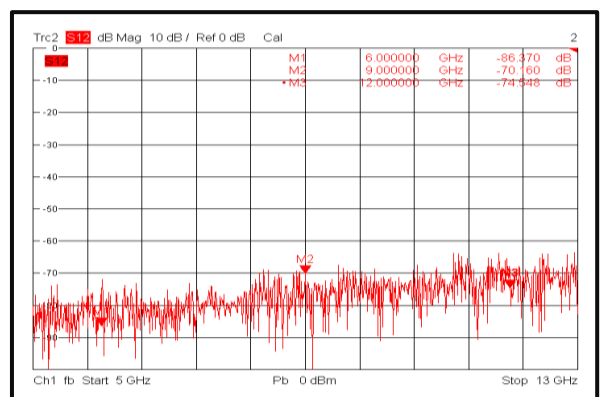


Insertion Loss Temperature Coefficient

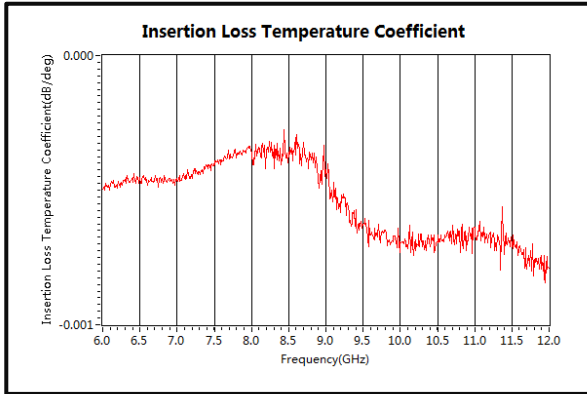


Insertion Loss vs. Temperature

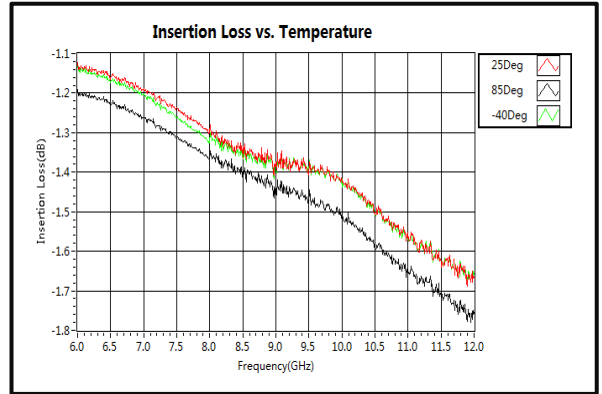

IIP3

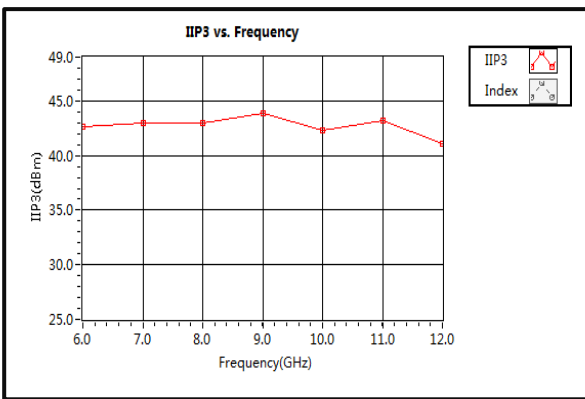

Switching Speed

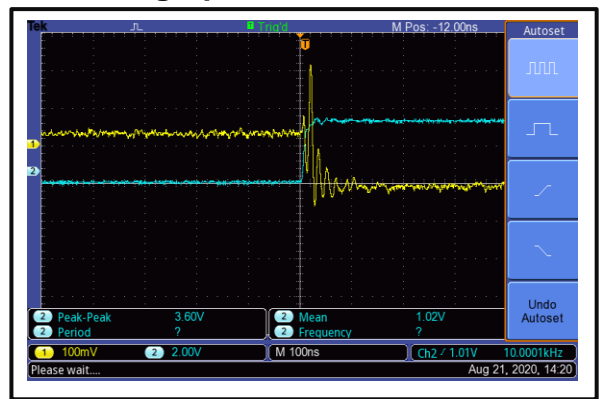

Switching Speed

