




Absorptive 8-12GHz Coaxial SP4T Switch

Features

- Wide Band Operation 8-12GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request

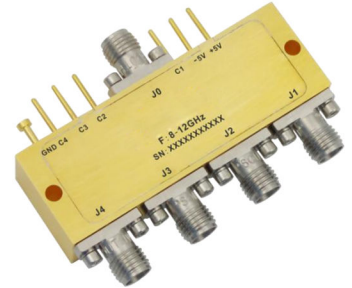

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min	Typ.	Max	Units
Frequency Range	8 - 12			GHz
Insertion Loss		2.1	2.6	dB
Insertion Loss Temperature Coefficient		0.003		dB/ °C
Isolation	60	70		dB
Input VSWR		1.5	1.8	: 1
Output VSWR		1.5	1.8	: 1
RF Input power			30	dBm
Power Dissipation (CW)		0.5		W
0.1dB Compression Point (P0.1dB)		30		dBm
IIP3		55		dBm
Switching Speed		50	100	ns
Weight	1.06			ounces
Impedance	50			Ω
Biasing(+5V/-5V)	160/50			mA
Input / Output Connectors	SMA-Female			
Finish	Gold Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			



Absolute Maximum Ratings

Biasing	+5V $\pm$ 10%/-5V $\pm$ 10%
---------	-----------------------------

Ordering Information


Part No.	Description
DBSA0408001200A	SP4T 8-12GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C ~ +85°C (Case Temperature)
Storage Temperature	-50°C ~ +105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)

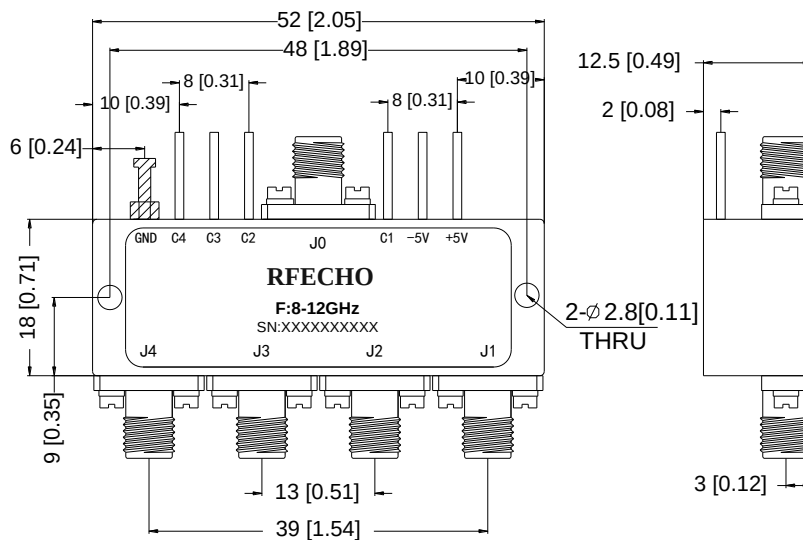


Truth Table


TTL Control Voltage THRESHOLD				Low(0)=0~0.8V
Control Input TTL				High(1)=2.8~5V
C4	C3	C2	C1	Signal Path State
0	0	0	0	NC
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4
1	1	1	1	OFF
Control Pin Customization available upon request				




Insertion Loss @+25°C

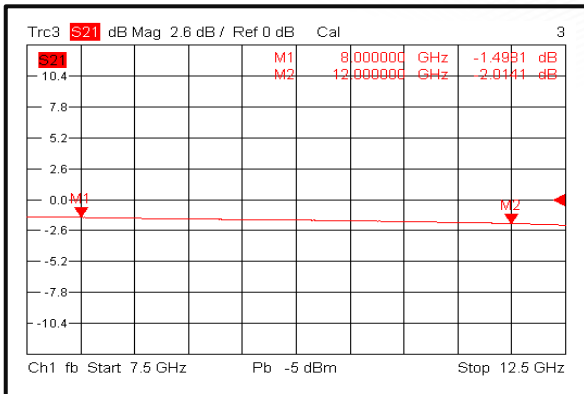


Input VSWR @+25°C

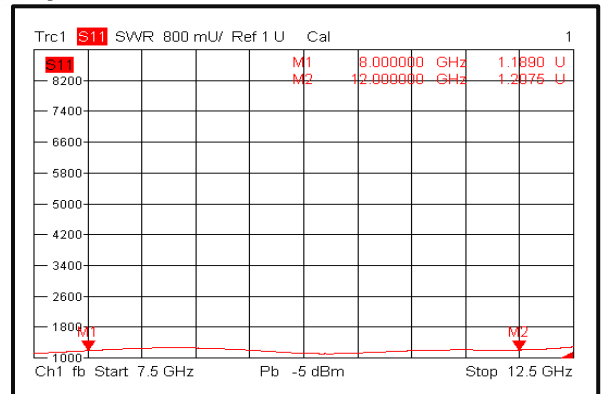


Output VSWR @+25°C

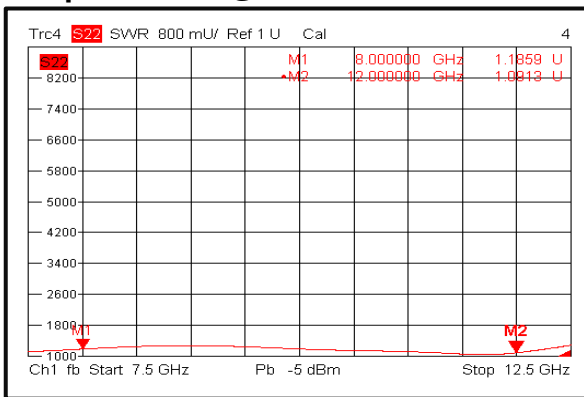


Isolation @+25°C

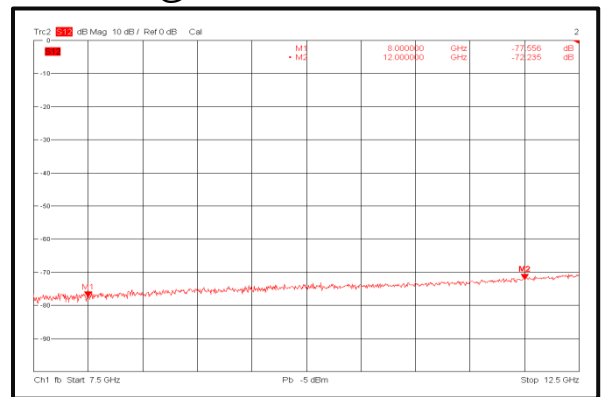


Insertion Loss @-40°C

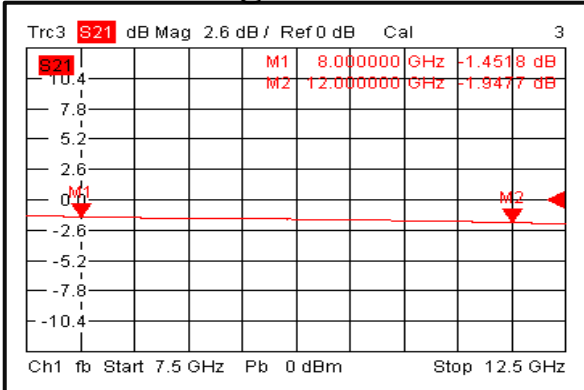


Input VSWR @-40°C

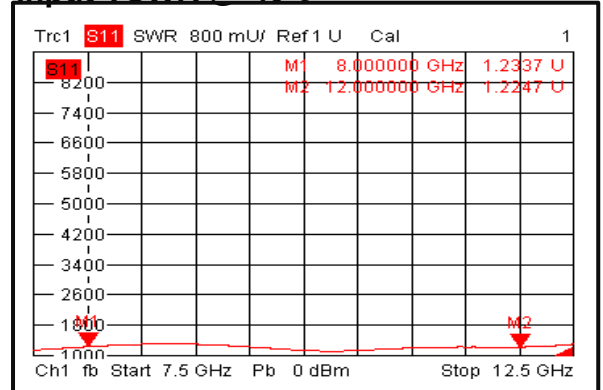

Output VSWR @-40°C

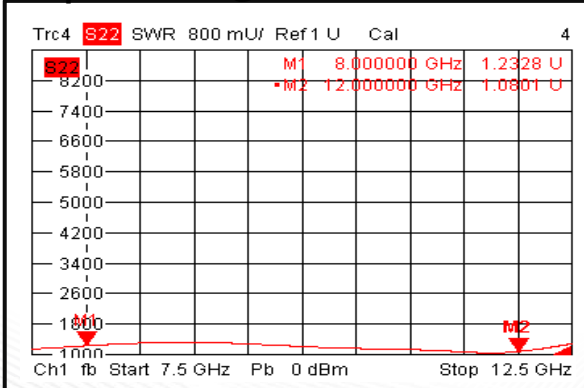


Isolation @-40°C

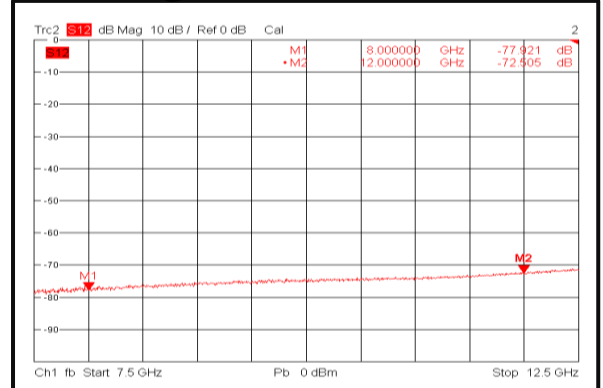





Insertion Loss @+85°C

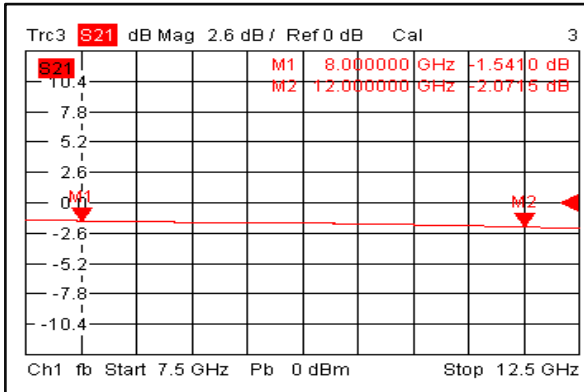


Input VSWR @+85°C

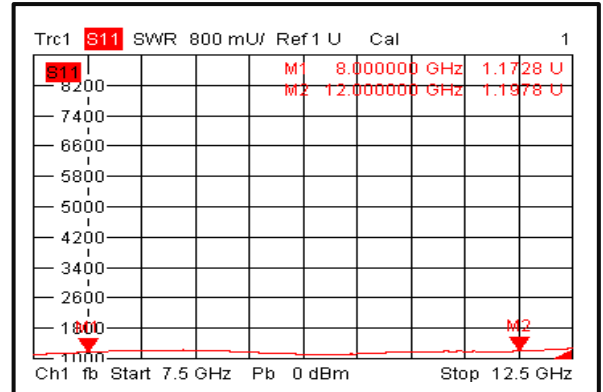


Output VSWR @+85°C

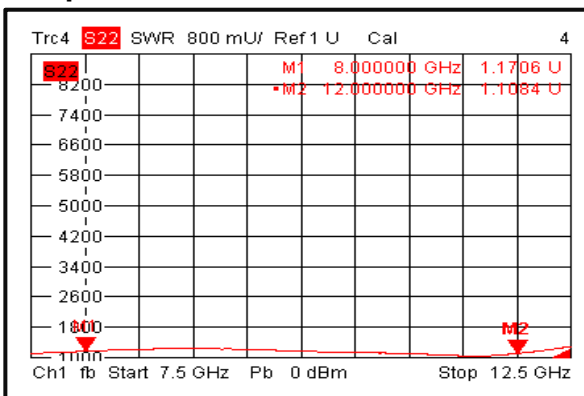

Isolation @+85°C

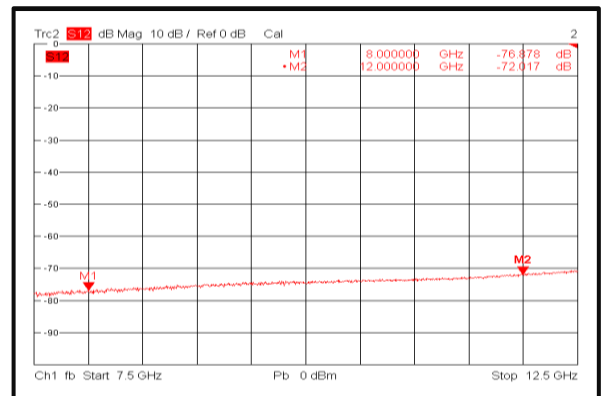

Switching Speed

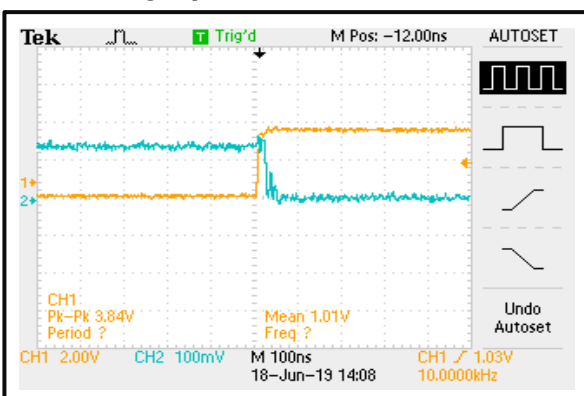

Switching Speed

