




Surface Mount Voltage Control Phase Shifter 1 - 2GHz

Features

- Wide Band Operation 1-2GHz
- 360° Phase Shift
- Low Insertion Loss and Low Phase Error
- Single Control Operation
- Customization available upon request

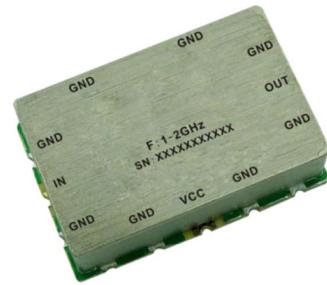

Parameters	Min	Typ.	Max	Units
Frequency Range		1-2		GHz
Phase Range	360			deg
Phase Flatness		±10	±15	deg
Insertion Loss		4.0	5.5	dB
Insertion Loss Temperature Coefficient		0.01		dB/ °C
Input VSWR		2.0	2.5	:1
Output VSWR		2.0	2.5	:1
0.1dB Compression Point (P0.1dB)		25		dBm
Control Voltage	0	10		V
Current		5		mA
Impedance		50		Ω
Weight		0.35		Ounces
Input / Output Connectors		SMD		
Material		Aluminum		

Absolute Maximum Ratings

Control Voltage	0~ +15V
RF Input Power	+27dBm

Environmental Specifications


Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Ordering Information


Part No.	Description
DBVCPS01000200C	1-2GHz Voltage Control Phase Shifter

Outline Drawing:


All Dimensions in mm (inches)

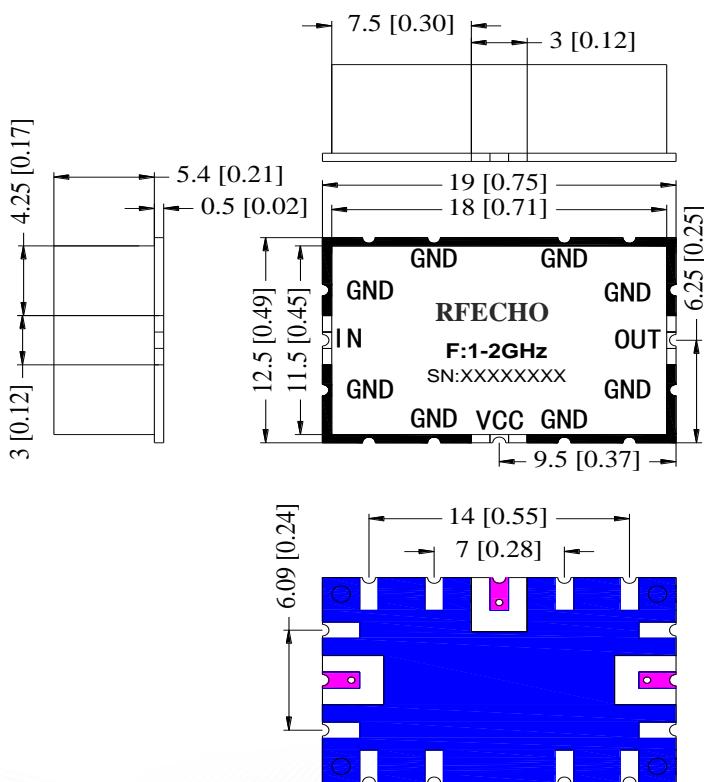


Insertion Loss @ +25°C

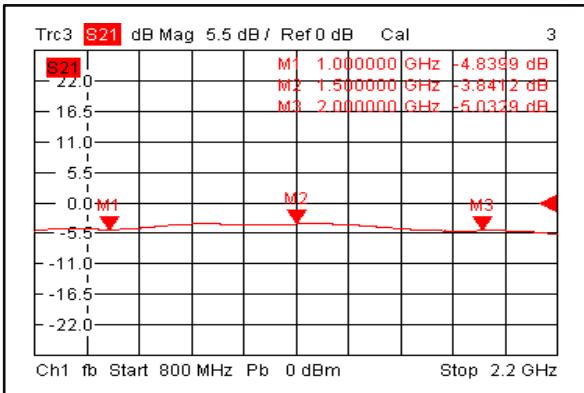


Input VSWR @ +25°C

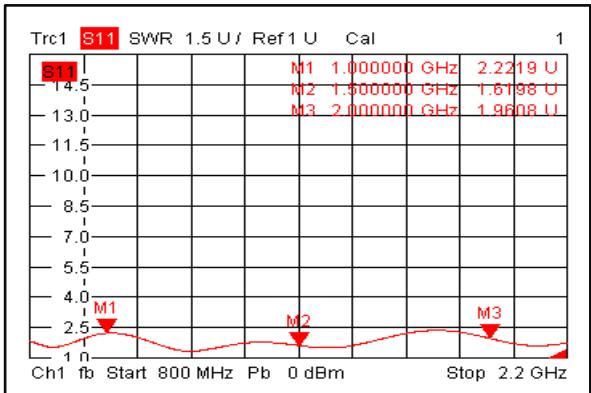


Output VSWR @ +25°C

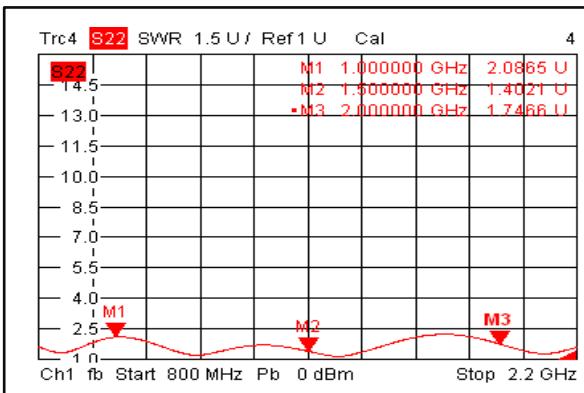


Insertion Loss @ -40°C

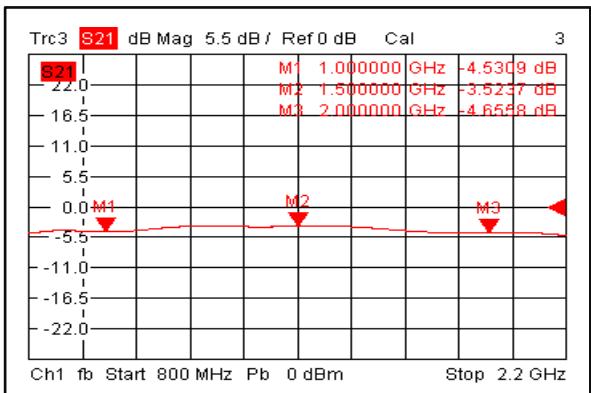


Input VSWR @ -40°C

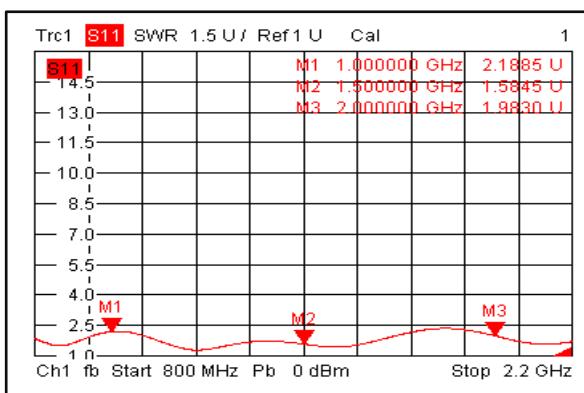


Output VSWR @ -40°C

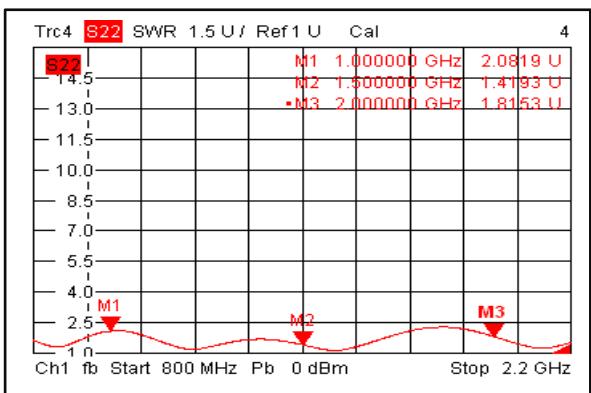


Insertion Loss @ +85°C

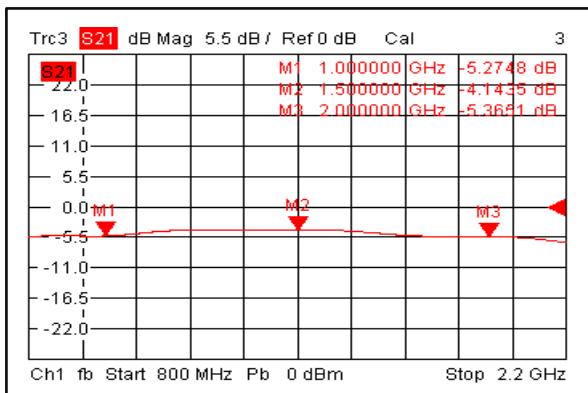


Input VSWR @ +85°C

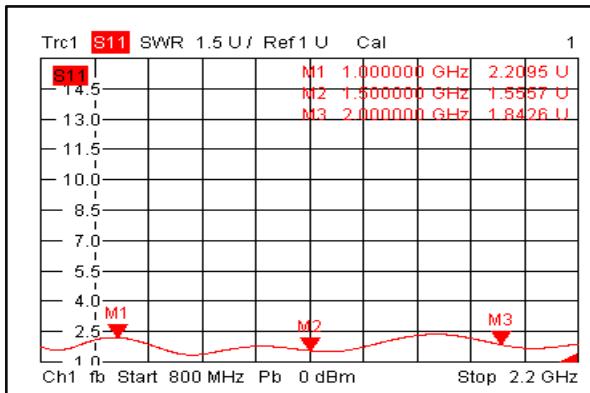


Output VSWR @ +85°C

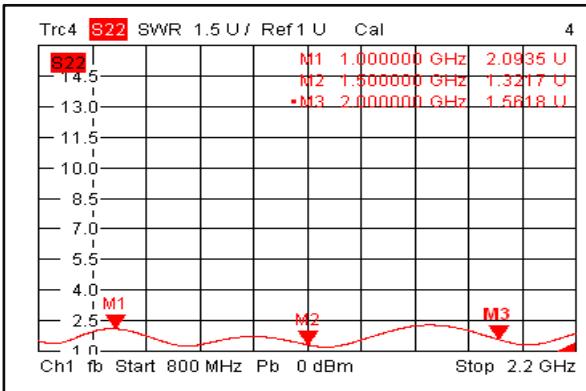


Insertion Loss vs. Frequency

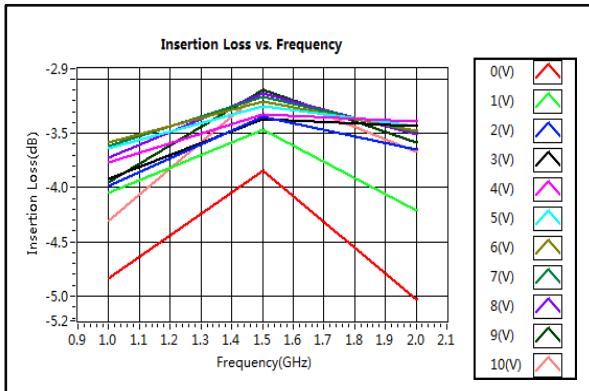


Input VSWR vs. Voltage

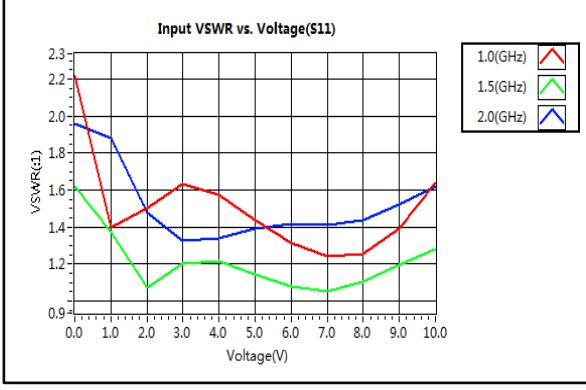


Output VSWR vs. Voltage

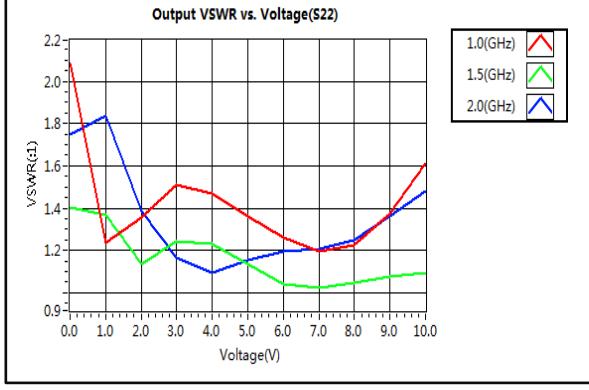

Phase Shift vs. Frequency

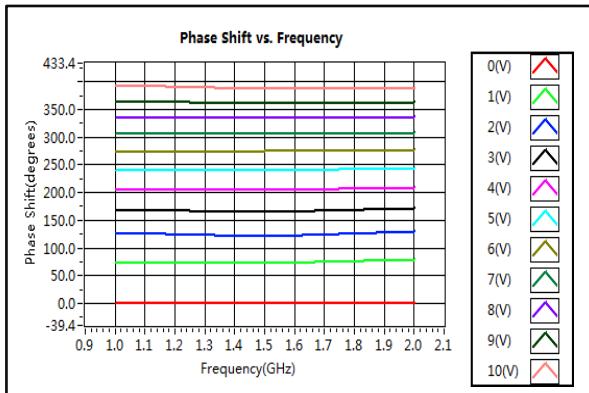

Phase Shift vs. Voltage

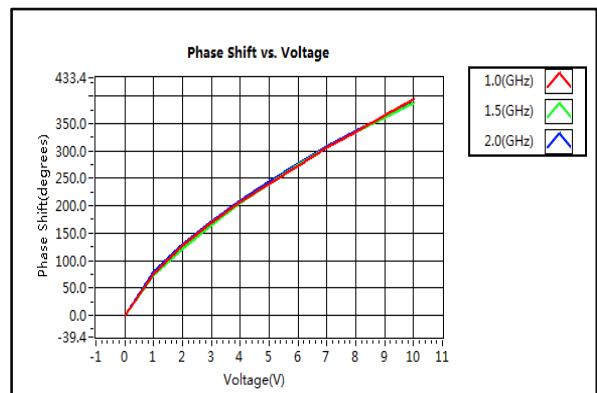

Attenuation vs. Frequency

