


LOW PHASE NOISE FREQUENCY SYNTHESIZER

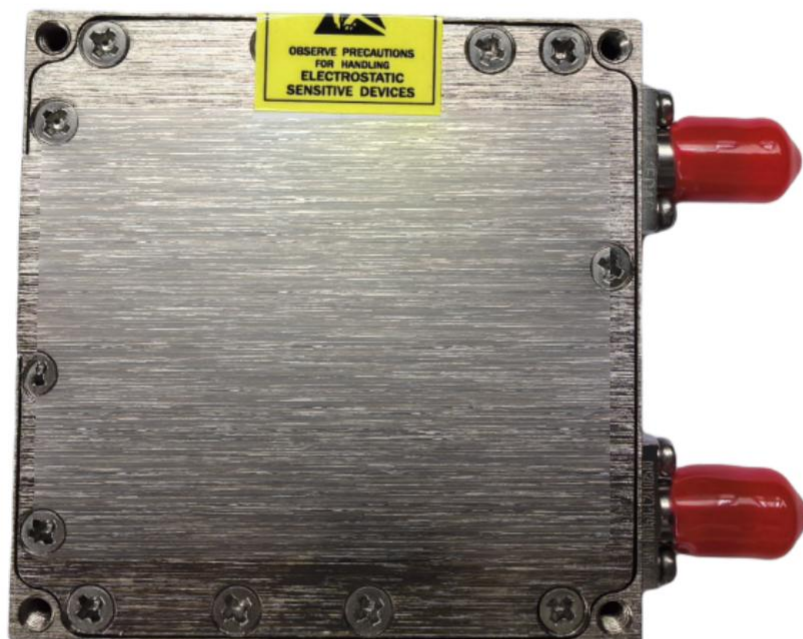

50 MHz to 22.6 GHz

Low phase noise
SPI control
0.1 MHz frequency step
Switching time: $\leq 25 \mu\text{s}$
50 × 50 × 13 mm package
Weight: $\leq 80 \text{ g}$

The OTFS21-22-25 is a low phase noise frequency synthesizer with an output frequency range of 50 MHz to 22.6 GHz. Control interface: SPI. Reference frequency: 100 MHz. The frequency step is 0.1 MHz. Frequency switching time: $\leq 25 \mu\text{s}$. Output power: $4 \pm 5 \text{ dBm}$. Dimensions: 50 × 50 × 13 mm. Weight: $\leq 80 \text{ g}$. Operating temperature: -40 to +70 °C.

TECHNICAL SPECIFICATIONS

OTFS21-22-25

Property	Value
Output frequency range	50 MHz-22.6 GHz
Frequency step	0.1 mHz
Frequency switching time	≤25 μs
Output power	4 ±5 dBm
Spurious level	≤-70 dBc typical; ≤-65 dBc maximum
Harmonic level	≤-5 dBc
Fractional-frequency components	Components at 1/2 and 3/2 of the output frequency: ≤-20 dBc (11.3-22.6 GHz)
Reference frequency	100 MHz
Reference input power	7 ±3 dBm
Reference phase noise	≤-133 dBc/Hz at 100 Hz offset; ≤-155 dBc/Hz at 1 kHz offset; ≤-165 dBc/Hz at 10 kHz offset; ≤-165 dBc/Hz at 100 kHz offset; ≤-170 dBc/Hz at 1 MHz offset
Supply voltage	+12 V ±0.5 V; maximum +15 V
Supply current	0.65 A typical; 0.9 A maximum
Control interface	SPI
Operating temperature	-40 to +70 °C
Storage temperature	-55 to +85 °C
Dimensions	50 × 50 × 13 mm
Weight	≤80 g
Reference connector	Removable SMA-K
RF output connector	Removable 2.92 mm female
Power/control connector	53261-0771-7P; 1.25 mm pitch
Startup time	5 s
Frequency stability	Tracks the external reference

TECHNICAL INFORMATION

OTFS21-22-25 | Phase Noise (dBc/Hz)

Output Frequency	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz
1 GHz	-110	-130	-136	-136	-136
5 GHz	-98	-117	-125	-125	-125
10 GHz	-92	-110	-119	-119	-119
22.6 GHz	-85	-104	-112	-112	-112


Column headings specify frequency offset from the carrier. Output frequency is listed in the first column. Values and limit signs follow the source tables.

Specification Notes

The 25 μ s switching option requires a 5 s startup period after each power-up.

The feature list quotes -110 dBc/Hz at 1 kHz offset and -119 dBc/Hz at 10 kHz offset, at 10 GHz output. These figures correspond to the 25 μ s option; use the model-specific phase-noise tables for other versions.


1/2 and 3/2 Component Suppression

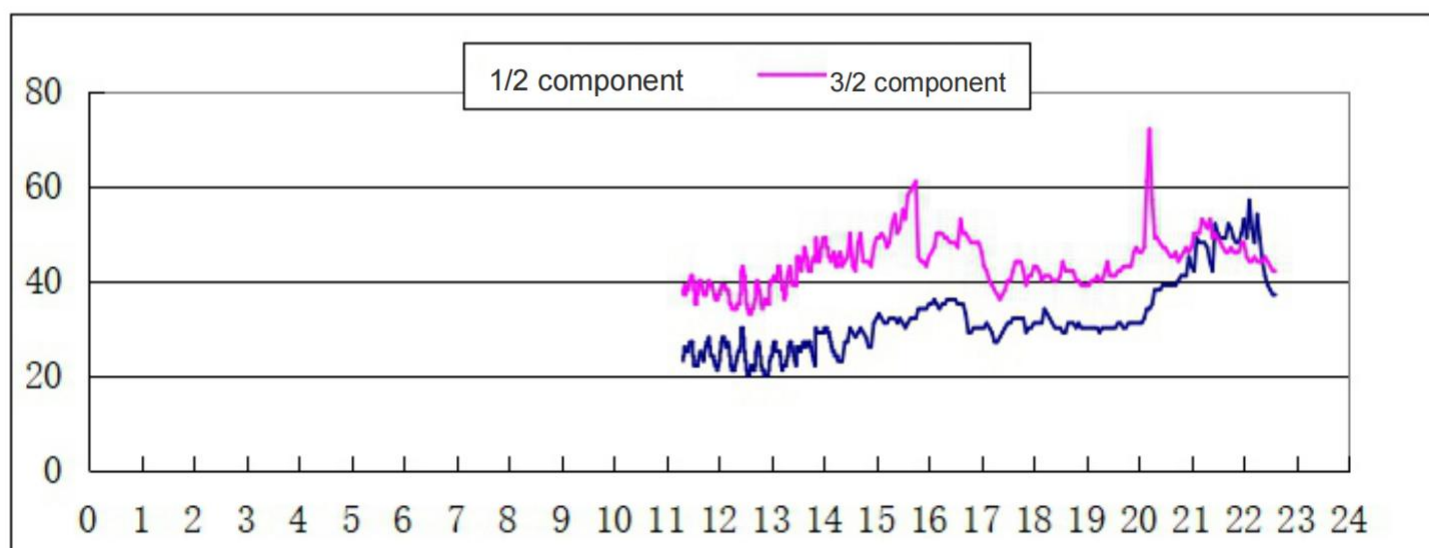

Source measurement example. Curves represent the illustrated test conditions.

TECHNICAL INFORMATION

10 GHz Phase Noise Measurement

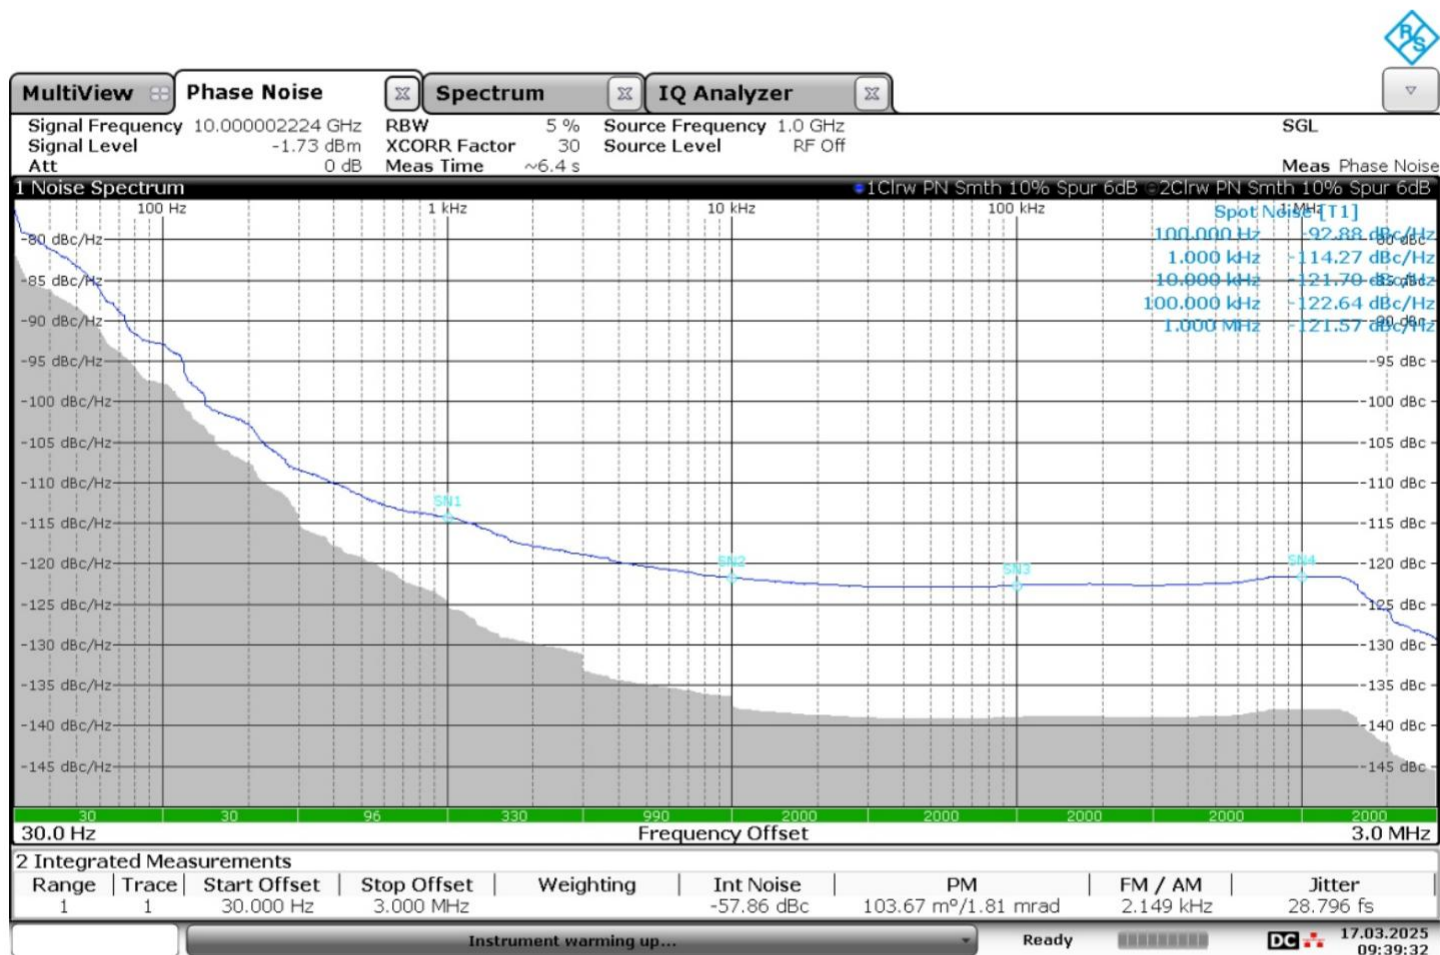

09:39:33 17.03.2025


Source measurement example. Curves represent the illustrated test conditions.

Connector Definitions

Connector	Definition
RF in	Removable SMA-K; pin diameter 0.38 mm
RF out	Removable 2.92 mm female; pin diameter 0.38 mm
Power/control	53261-0771-7P; 1.25 mm pitch; single-row, right-angle


TECHNICAL INFORMATION

Second and Third Harmonic Suppression

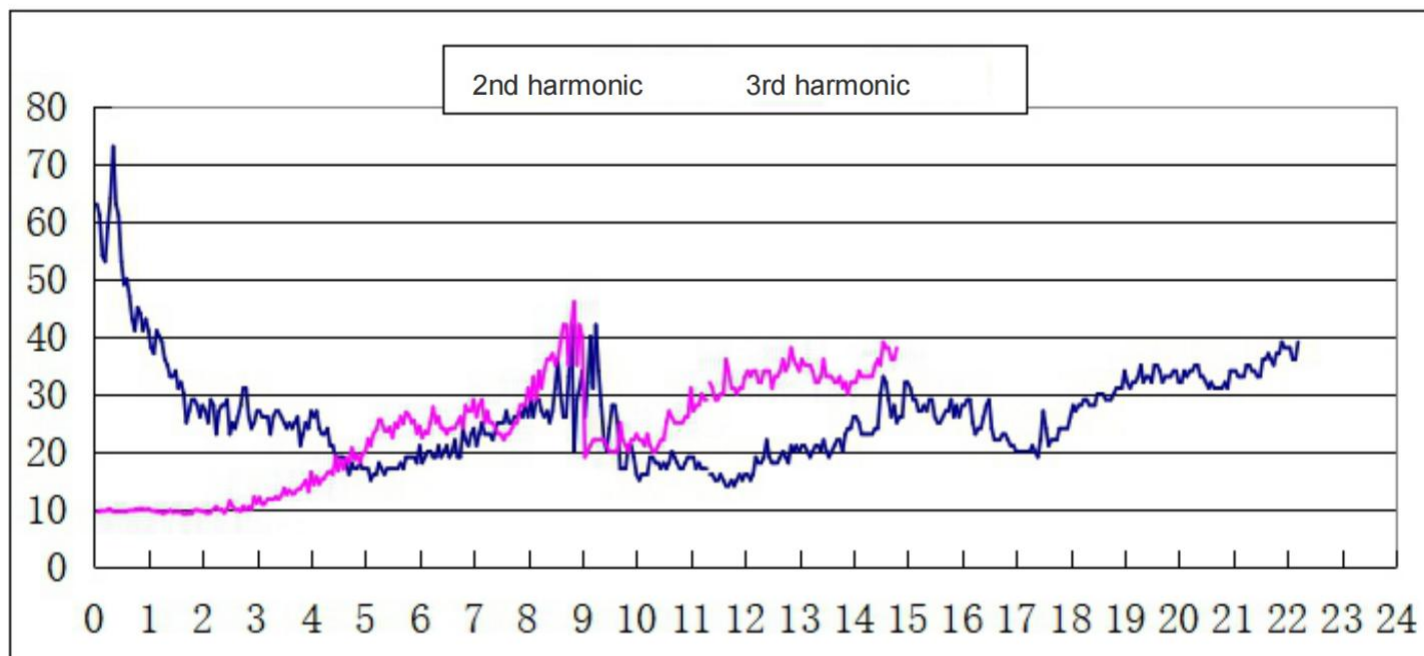

Source measurement example. Curves represent the illustrated test conditions.


Mounting Dimensions

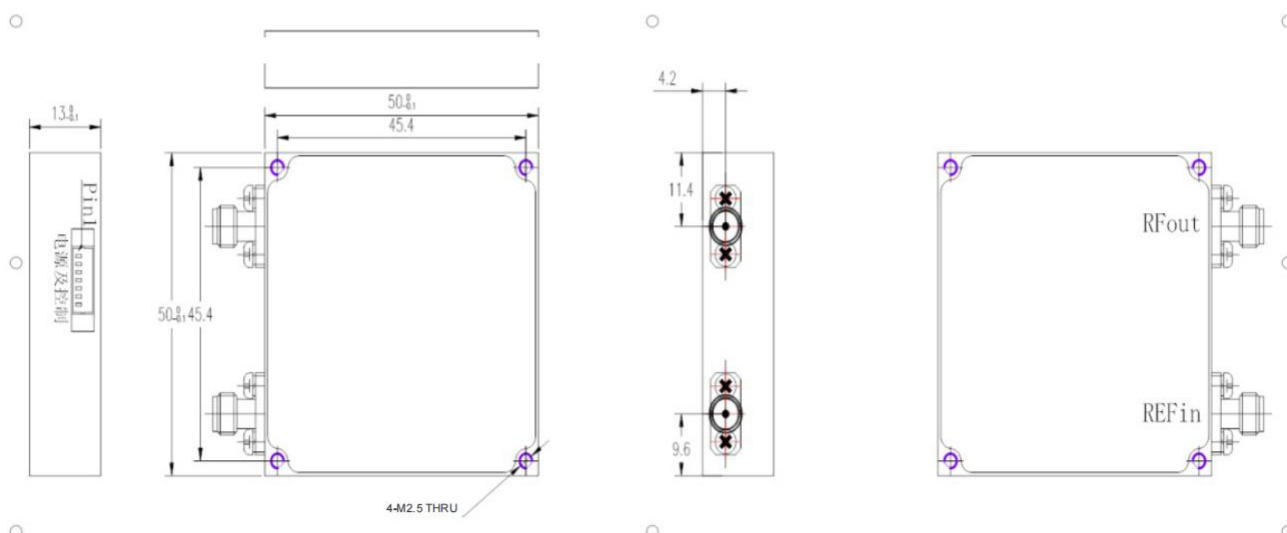

Dimensions in mm.

TECHNICAL INFORMATION

Output Power vs. Frequency and Temperature

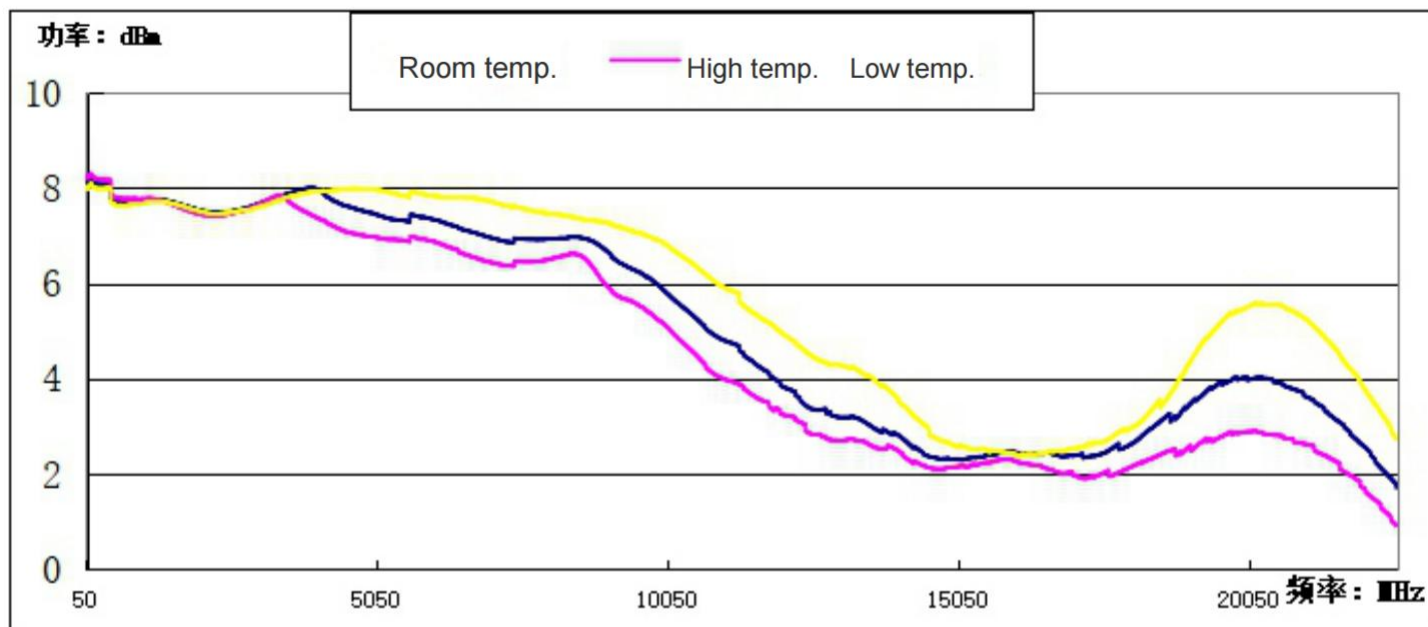

Source measurement example. Curves represent the illustrated test conditions.

53261-0771-7P Pin Assignments (1.25 mm pitch, single-row, right-angle)

Pin	Definition
1	+12 V supply
2	GND
3	MOSI: SPI interface
4	LE: SPI interface
5	MISO: SPI interface
6	SCK: SPI interface
7	LD: high when locked