

# 8 GHz STANDARD-PERFORMANCE DIGITAL RF RECEIVER MODULE



## 100 kHz to 8 GHz

508.8 MHz maximum real-time bandwidth

1 standard narrowband DDC channels

Digital I/Q output via Gigabit Ethernet and QSFP+

The OZY04-CH-ML combines analog RF processing and digital signal processing in one module. It receives RF signals from an antenna and outputs digital baseband data via Gigabit Ethernet and QSFP+. Its maximum real-time bandwidth is 508.8 MHz, and its panorama scan speed is better than 1500 ghz/s (rbw=25 khz). The built-in GPS module timestamps data for use in time difference of arrival (TDOA) geolocation systems. The module can operate as an RF sensor or be integrated into a customer system.

### Typical Applications

- Radio spectrum management
- General spectrum analysis
- Electromagnetic environment support for low-altitude applications
- Signal reconnaissance and analysis
- Satellite navigation monitoring
- OEM integration into customer systems

## General Specifications

|                             |                                              |
|-----------------------------|----------------------------------------------|
| Frequency Range             | 100 kHz to 8 GHz                             |
| Maximum Real-Time Bandwidth | 508.8 MHz                                    |
| Primary Functions           | FFM, PSCAN, FSCAN, MSCAN, MULTN, DPS, IQSTRM |

## RF Performance

|                                    |                                                                 |
|------------------------------------|-----------------------------------------------------------------|
| Frequency Accuracy                 | Better than 0.5 ppm; better than 0.001 ppm (with GPS connected) |
| Phase Noise                        | -100 dBc/Hz at 10 kHz offset (1 GHz carrier frequency)          |
| Noise Figure                       | Better than 12 dB                                               |
| Second-Order Intercept Point (IP2) | Better than 55dBm                                               |
| Third-Order Intercept Point (IP3)  | Better than 15dBm                                               |
| IF Rejection                       | Better than 90 dB                                               |
| Image Rejection                    | Better than 90 dB                                               |

## Digital Processing Specifications

|                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Panorama Scan Speed                                             | Better than 1500 GHz/s (RBW=25 kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| DDC Channel Configuration                                       | 1 wideband channel (508.8 MHz) + 1 narrowband channel (500 kHz each), standard. Optional expansion increases the number of narrowband channels.                                                                                                                                                                                                                                                                                                                                                                |
| I/Q Data Acquisition                                            | <p>Single-packet mode: continuous I/Q data within each packet; 8 to 500,000,000 complex samples. 32 bits per complex sample: 16-bit I and 16-bit Q.</p> <p>Continuous mode: with Gigabit Ethernet output only, I/Q data continuity is guaranteed at 10 MHz bandwidth.</p> <p>With QSFP+ transfer enabled, I/Q data continuity is guaranteed at 508.8 MHz bandwidth.</p> <p>Optional stream-to-disk: an internal high-speed disk buffers the data, guaranteeing continuous I/Q data at 254.4 MHz bandwidth.</p> |
| Minimum Signal Duration for 100% Probability of Intercept (POI) | 100 ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## Interfaces, Power and Environmental Specifications

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| Communication Interfaces | Gigabit Ethernet (RJ45) and QSFP+                        |
| Power Consumption        | $\leq 50$ W<br>$\leq 55$ W (with stream-to-disk enabled) |
| Operating Temperature    | -35 °C to +60 °C                                         |
| Storage Temperature      | -40 °C to +70 °C                                         |
| Dimensions               | 201.4 × 90.4 × 35.35 mm                                  |


## Operating Principle Overview

Developed in-house, these digital RF receiver modules combine analog RF processing and digital signal processing in an integrated architecture. The functional block diagram is shown below. The modules accept RF signals from an antenna and output digital baseband signals via digital interfaces such as Ethernet and USB. They can operate directly as RF sensors for monitoring and reception of a wide range of challenging signals, or be integrated into other systems with minimal integration effort, short development cycles, consistent performance and stable operation.

### Product-Family Overview

The operating principle and features below describe the overall product family. The listed performance figures do not apply to every model. For the specifications of this model, refer to the technical specifications on pages 2-3.

**Product-Family Highlights:** **compact form factor**; **wide bandwidth** (508.8 MHz); **broad frequency coverage** (40 GHz); **high frequency accuracy** (0.5 ppm); **real-time signal capture** (20 ns pulse capture); **high-speed scanning** (2000 GHz/s at RBW = 25 kHz); and **expandability** (support for streaming I/Q data to disk at a signal bandwidth of 320 MHz).

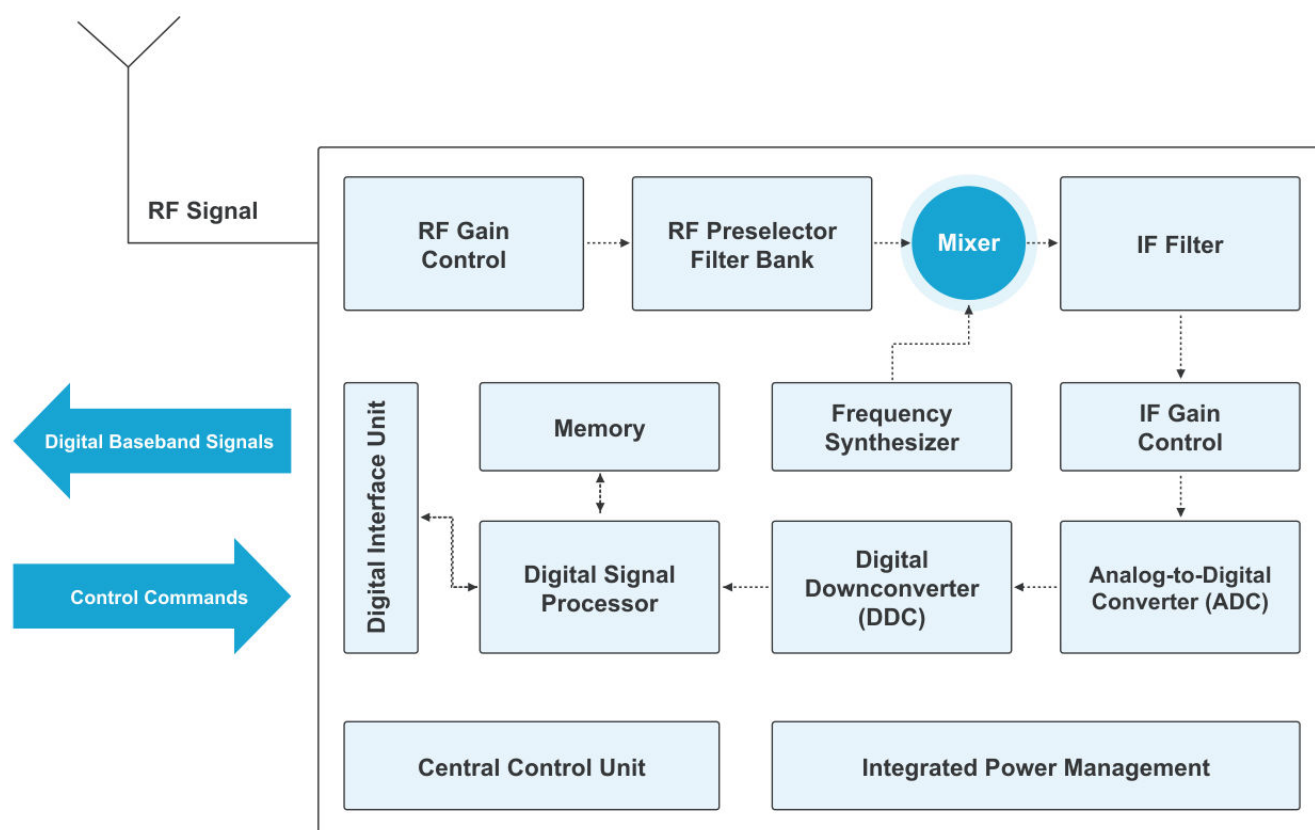

Digital RF Receiver Module - Functional Block Diagram


## Functional Overview

Supported modes: FFM, PSCAN, FSCAN, MSCAN, MULTN, DPS, IQSTRM.

## Fixed-Frequency Monitoring (FFM)

In FFM mode, the module converts RF signals within a selected bandwidth at any center frequency in its operating range into digital baseband data through analog downconversion and digital signal processing. The processing section provides independent digital downconverter (DDC) channels: one wideband channel and 1 narrowband channel. It supports FFT-based spectrum analysis and AM/FM demodulation, and outputs I/Q, spectrum and audio data.


The built-in GPS module provides high-accuracy timestamps after satellite lock is acquired. The timestamped data can be used for TDOA geolocation and signal analysis.

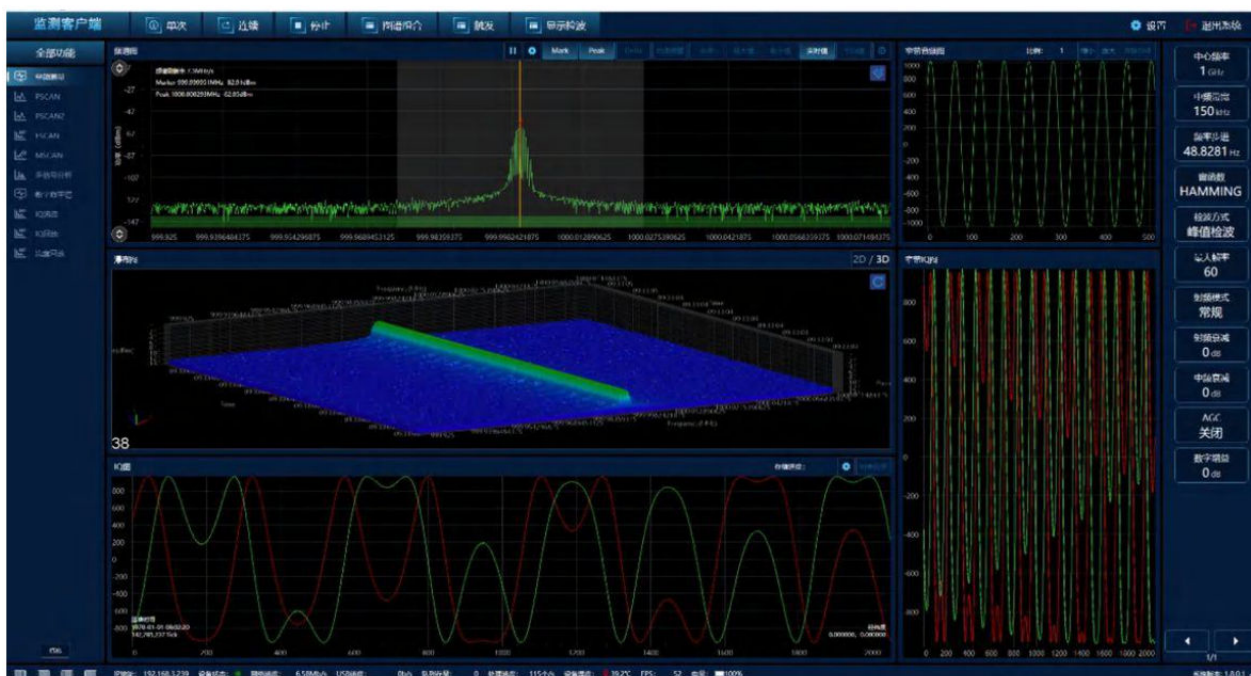

Fixed-frequency monitoring

## Panorama Scan (PSCAN)


In panorama scan mode, the module scans a selected frequency range using successive FFM measurements. The center frequency is stepped by an amount equal to the FFM measurement bandwidth, covering the selected frequency range.

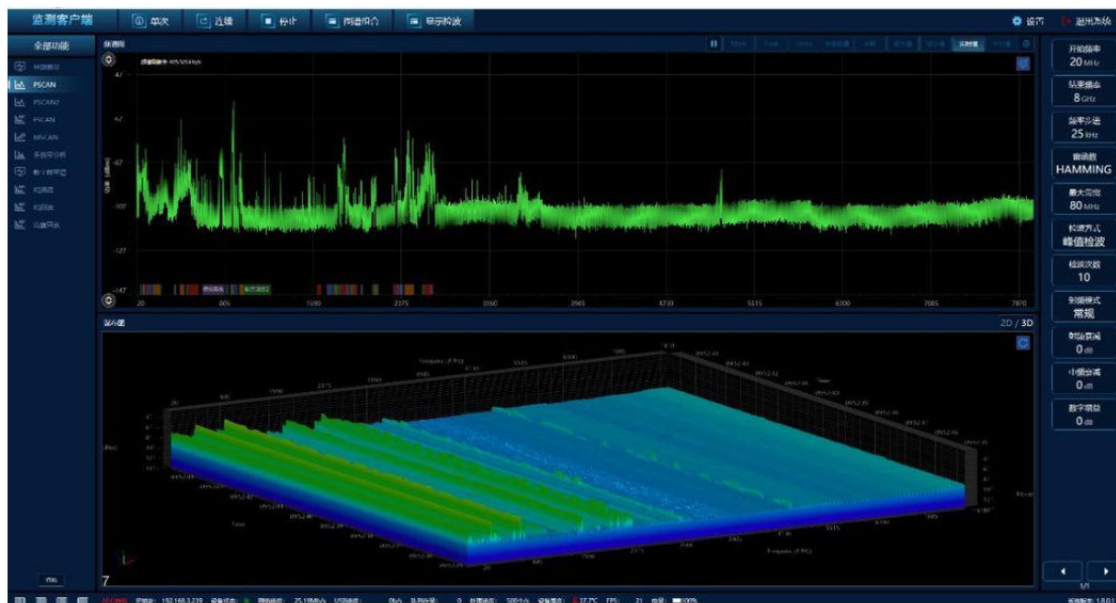

Panorama scan

## Frequency Scan (FSCAN)

In frequency scan mode, the module performs a fine scan over a selected range within its operating frequency range. It calculates signal power in the time domain and outputs the resulting spectrum data.

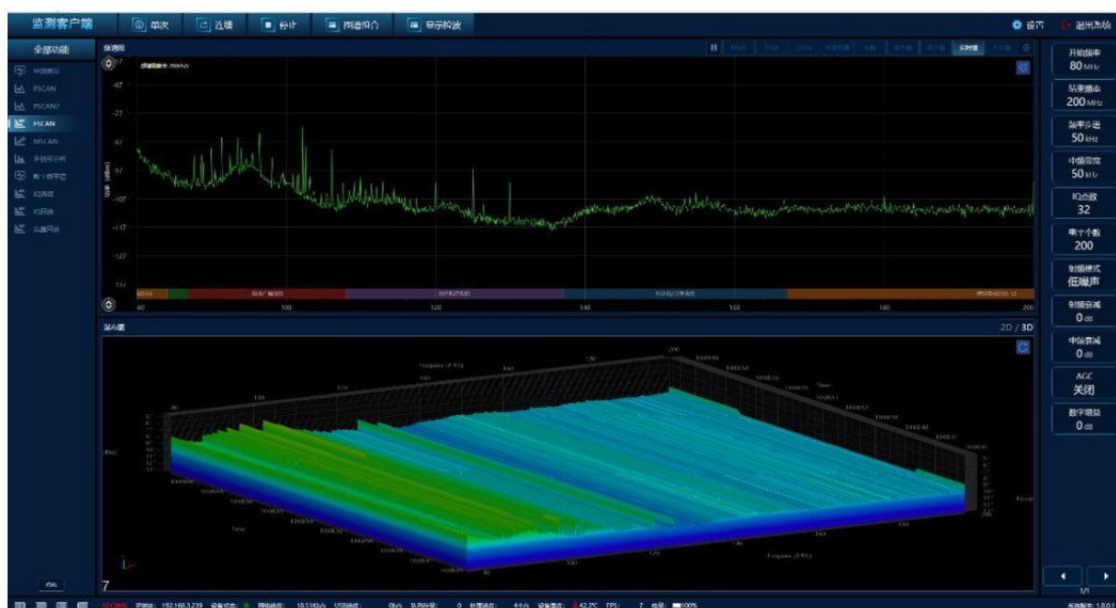

Frequency scan

## Multi-Channel Analysis (MULTN)


In multi-channel analysis mode, the module provides 1 wideband channel (508.8 MHz) + 1 narrowband channel (500 kHz each), standard. Optional expansion increases the number of narrowband channels. The center frequency of each narrowband DDC can be set within the wideband channel. The module supports FFT-based spectrum analysis and AM/FM demodulation, and outputs spectrum, I/Q and audio data.



Multi-channel analysis

## Digital Probability Spectrum (DPS)

In DPS mode, the module rapidly accumulates spectrum frames. Over a period of time, it counts occurrences at each frequency and amplitude and displays the results using a color scale. This display helps reveal co-channel signals. The module can also output spectrum data directly.

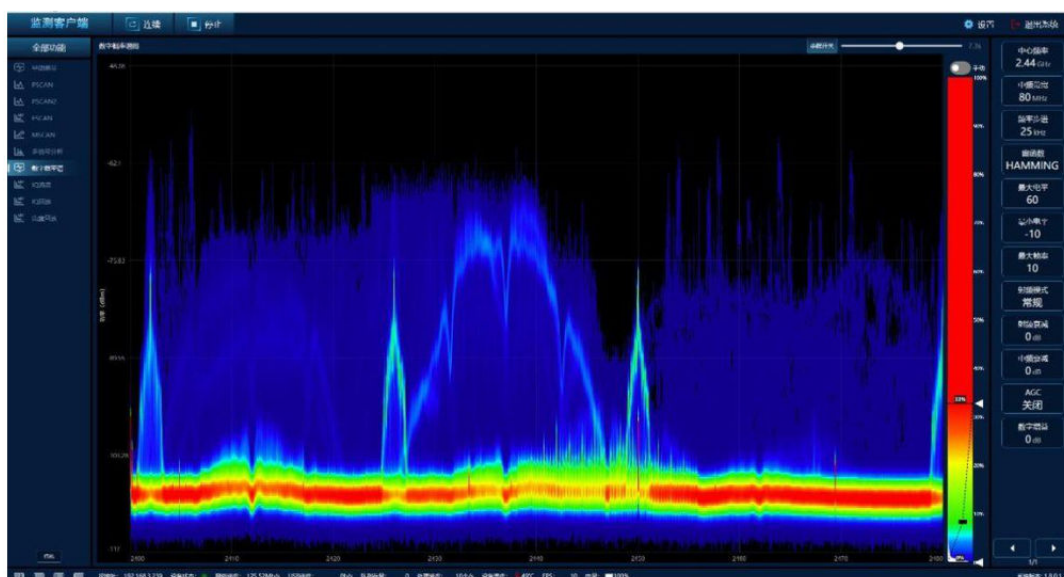

Digital probability spectrum

## Frequency List Scan (MSCAN)

In frequency list scan mode, the module converts signals at multiple selected frequencies and bandwidths within its operating frequency range into baseband data through analog downconversion and digital signal processing. It outputs spectrum data for the specified frequency list.



Frequency list scan

## High-Speed Stream-to-Disk (IQSTRM, Optional)


The optional stream-to-disk function continuously acquires I/Q data at a specified frequency for extended periods and stores the data on the internal disk for retrieval. The optional disk capacity is up to 7 TB. For this product, continuous I/Q recording is supported at 254.4 MHz bandwidth.



High-speed stream-to-disk

## Outline Dimensions

All dimensions are in millimeters.

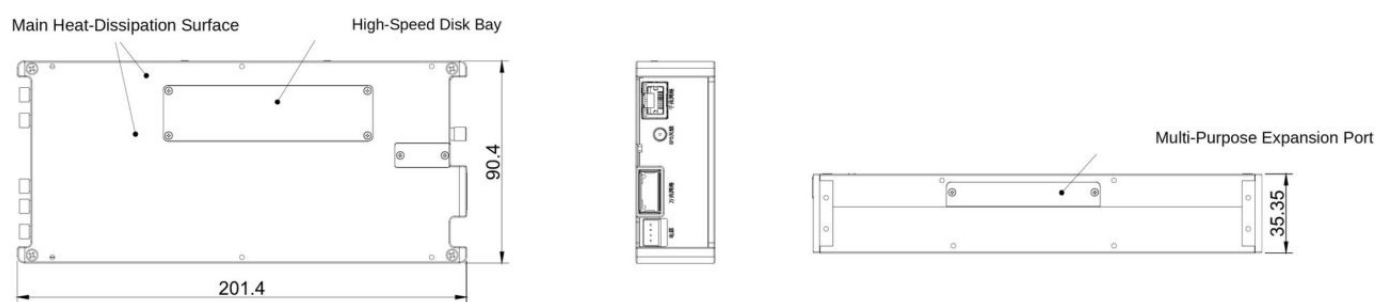

*Mechanical outline drawing*