OG103D-2110-2200



Features

- Surface-mount construction
- Frequency range: 2110–2200 MHz
- Isolation: 21 dB
- Insertion loss: 0.30 dB
- Forward power: 50 W

Description

The OG103D-2110-2200 is a surface-mount isolator for 2110–2200 MHz. It routes reflected RF power into its termination. The forward and reverse power ratings are listed on page 2.

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

Technical indicators

Frequency	Return loss	Isolation	Insertion loss	IMD3	Forward power
2110–2200 MHz	21 dB	21 dB	0.30 dB	-55 dBc at 2 × 5W	50 W
Reverse power			**Operating temp.**		
25 W			-40 to 105 °C		

Mechanical dimensions

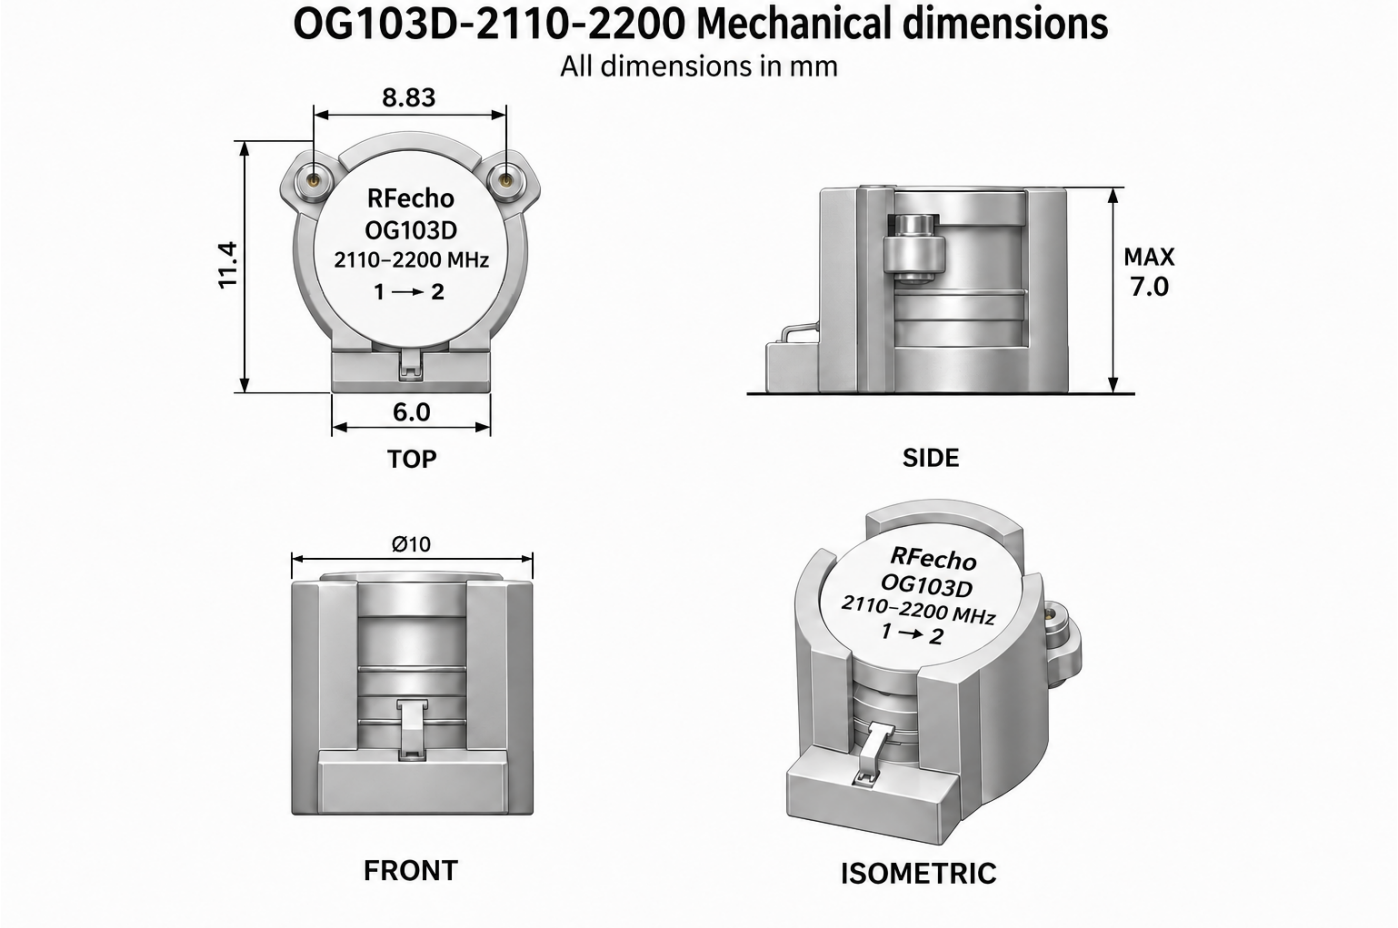

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025