OG511C-758-960



Features

- Drop-in construction
- Frequency range: 758–960 MHz
- Isolation: 18 dB
- Insertion loss: 0.35 dB
- Forward power: 250 W

Description

The OG511C-758-960 is a drop-in isolator for 758–960 MHz. It routes reflected RF power into its termination. The forward and reverse power ratings are listed on page 2.

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

Technical indicators

Frequency	Return loss	Isolation	Insertion loss	IMD3	Forward power
758–960 MHz	18 dB	18 dB	0.35 dB	-65 dBc at 2 × 50W	250 W
Reverse power			**Operating temp.**		
150 W			-40 to 120 °C		

Mechanical dimensions

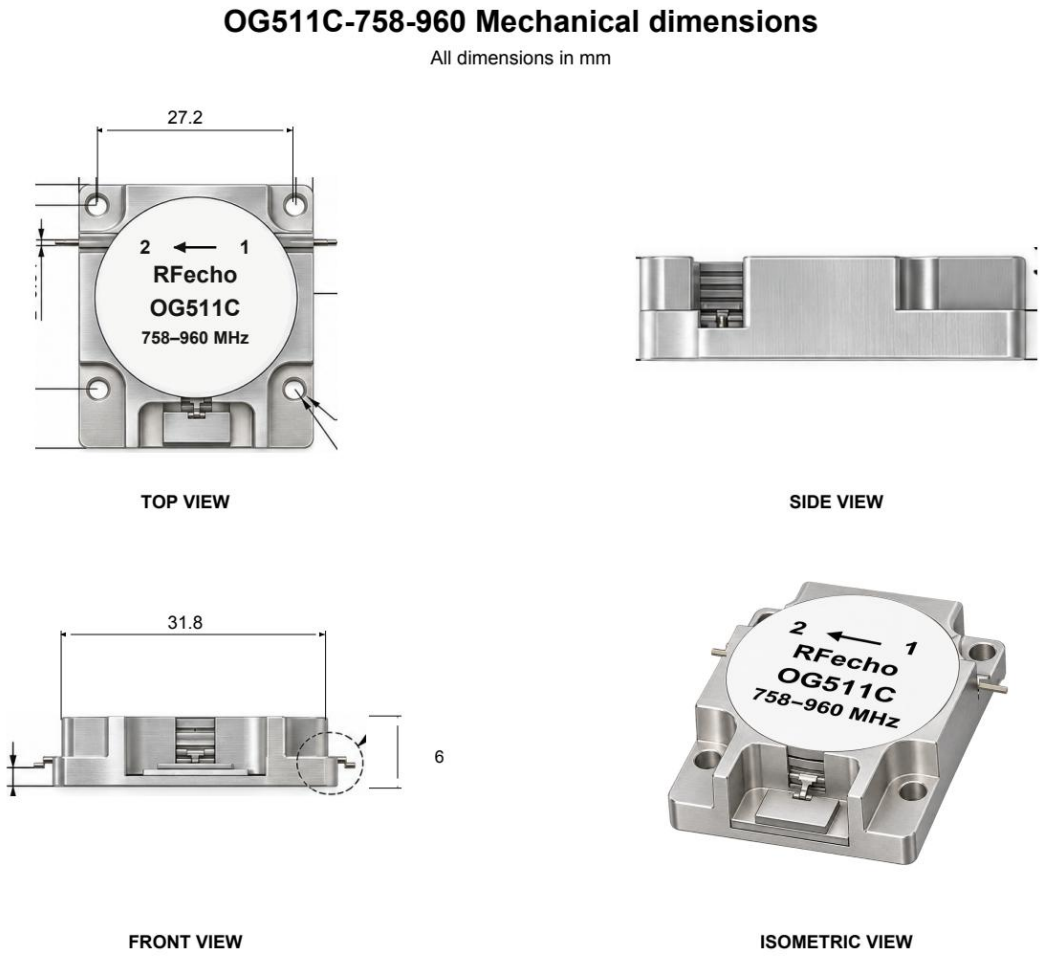

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

RF performance

Manufacturer test trace | Catalog page 31

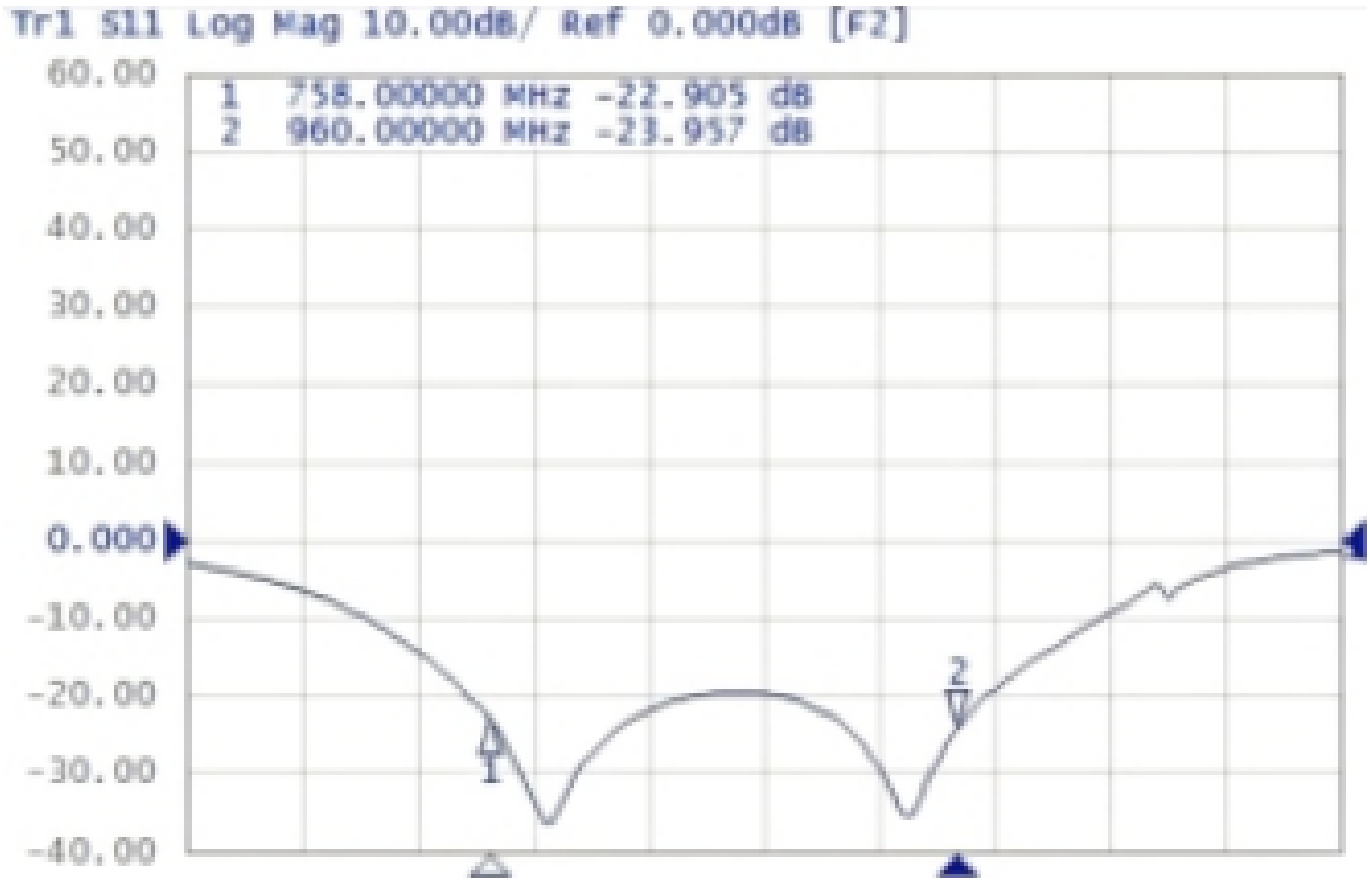

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

RF performance

Manufacturer test trace | Catalog page 31

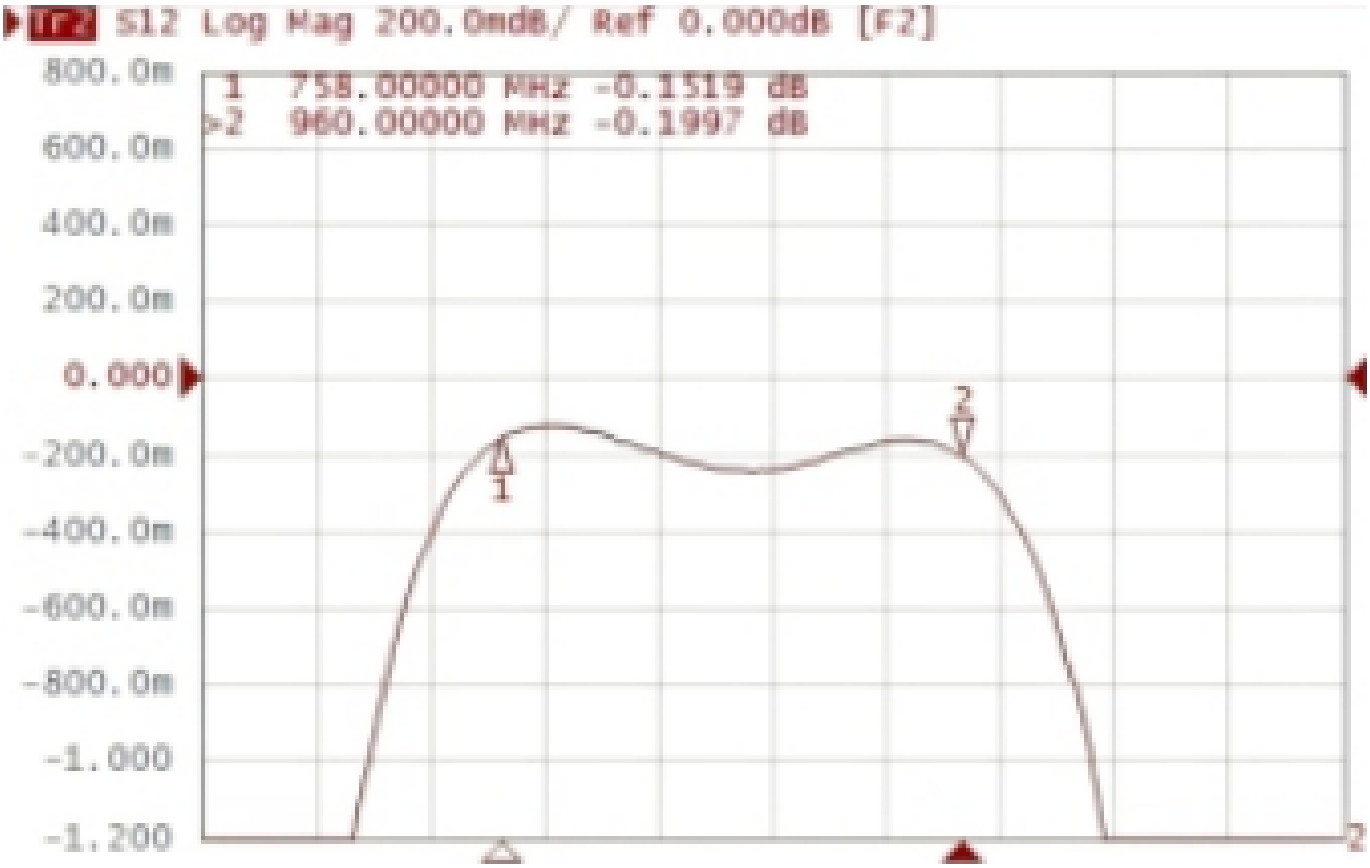

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

RF performance

Manufacturer test trace | Catalog page 31

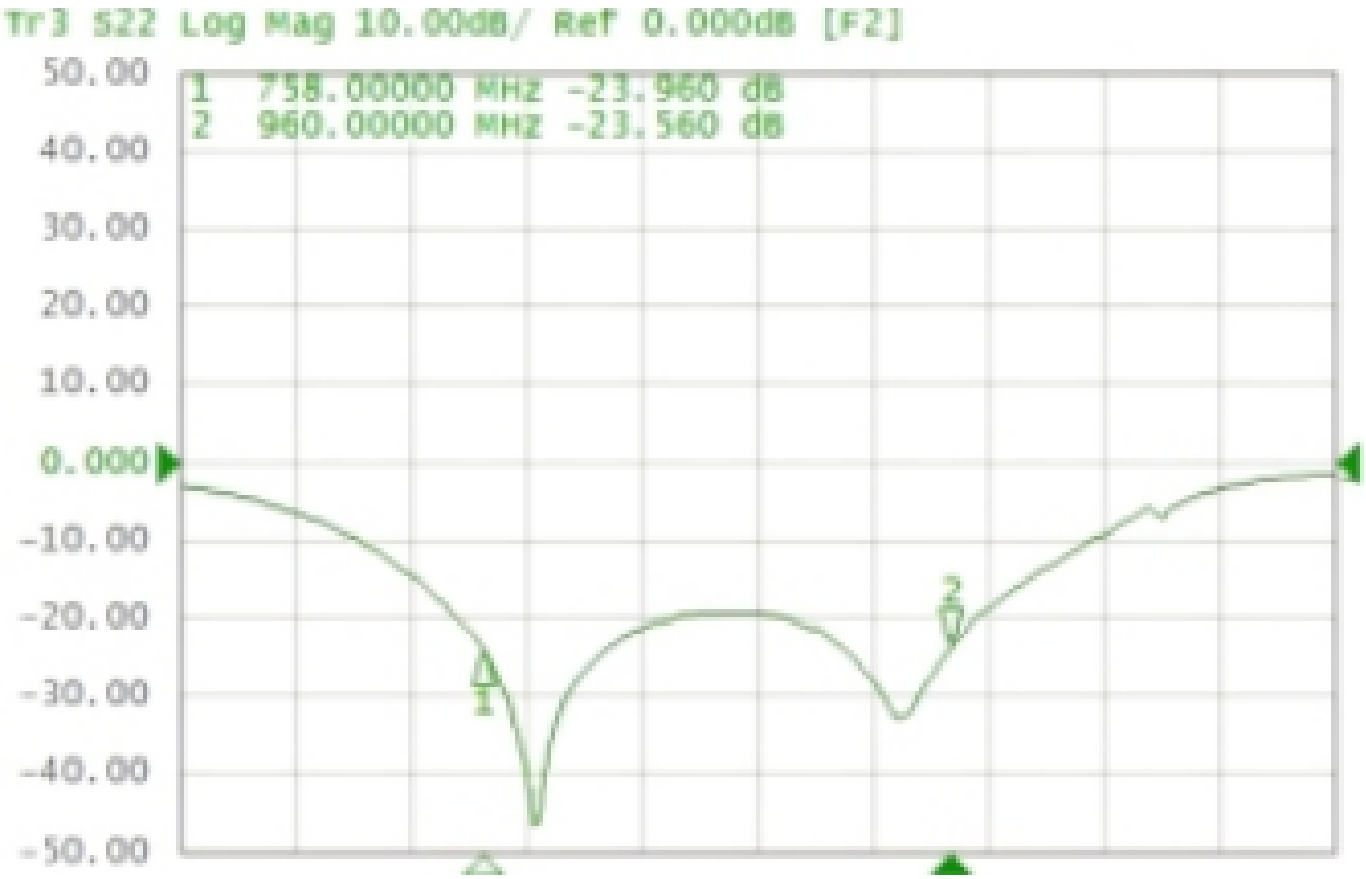

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

RF performance

Manufacturer test trace | Catalog page 31

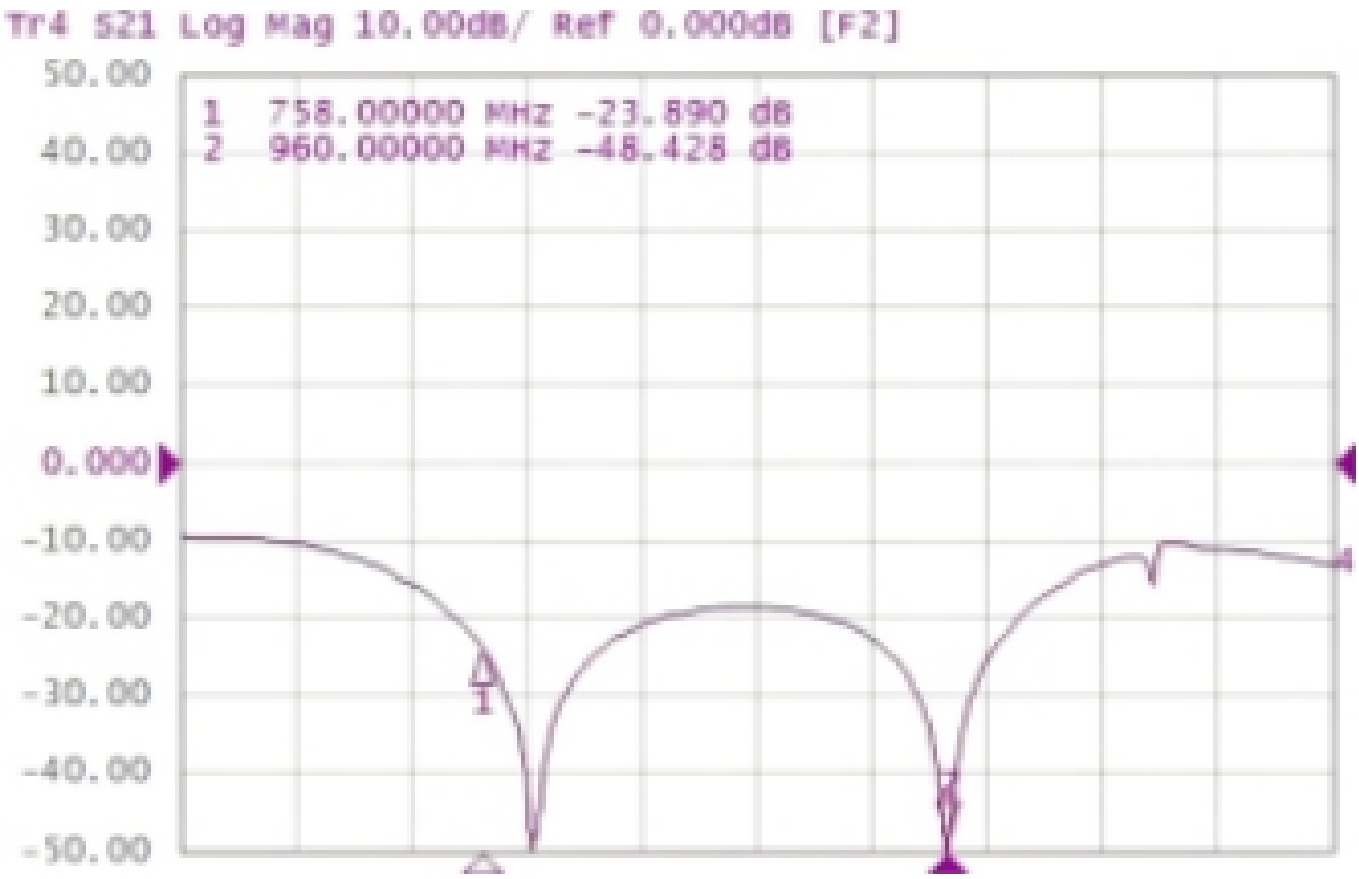

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025