OG563D-1609-1679

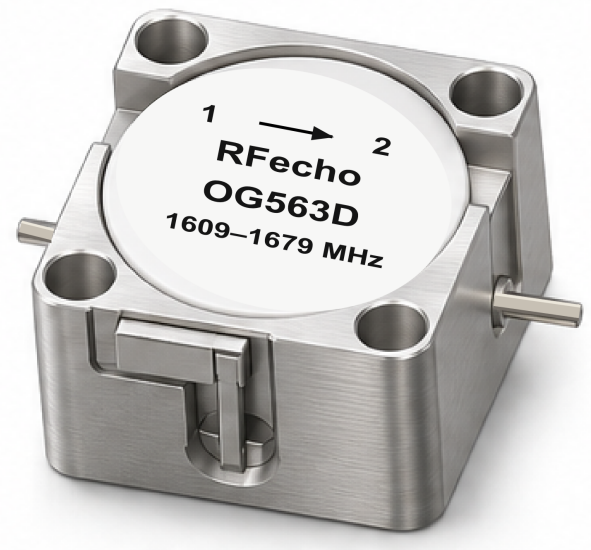

Features

- Drop-in construction
- Frequency range: 1609–1679 MHz
- Isolation: 18 dB
- Insertion loss: 0.55 dB
- Forward power: 80 W

Description

The OG563D-1609-1679 is a drop-in isolator for 1609–1679 MHz. It routes reflected RF power into its termination. The forward and reverse power ratings are listed on page 2.

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

Technical indicators

Frequency	Return loss	Isolation	Insertion loss	IMD3	Forward power
1609–1679 MHz	18 dB	18 dB	0.55 dB	-62 dBc at 2 × 10W	80 W
Reverse power			**Operating temp.**		
10 W			-40 to 85 °C		

Mechanical dimensions

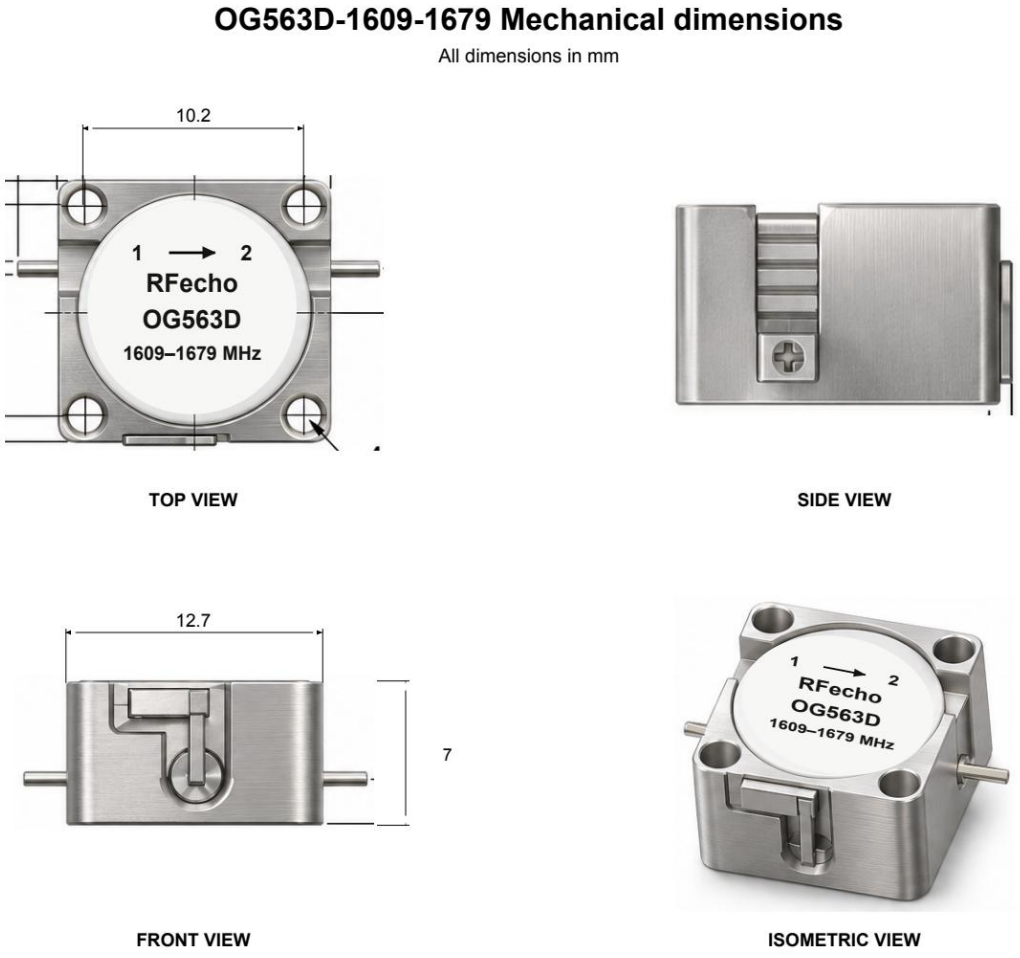

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025