OG5A044-17.7-21.2

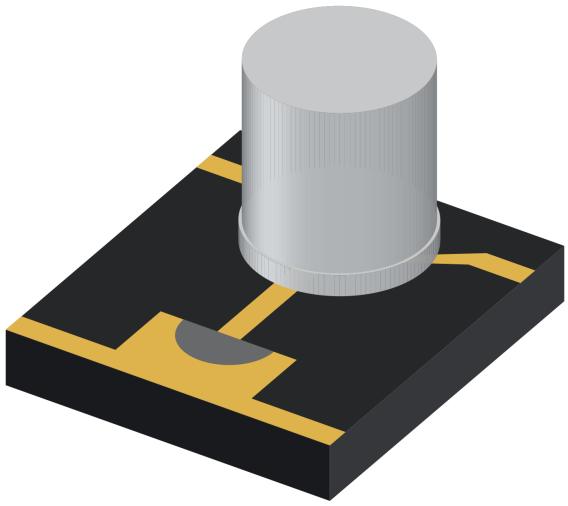

Features

- Microstrip construction
- Frequency range: 17.7–21.2 GHz
- Insertion loss: 0.6 dB
- Isolation: 18.0 dB
- Forward power: 10.0 W

Description

The OG5A044-17.7-21.2 is a microstrip isolator for 17.7–21.2 GHz. It routes reflected RF power into its termination. The forward and reverse power ratings are listed on page 2.

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025

Technical indicators

Frequency	Insertion loss	Isolation	VSWR	Forward power	Reverse power
17.7–21.2 GHz	0.6 dB	18.0 dB	1.35	10.0 W	1.0 W

Operating temp.
-55 to +85 °C

Mechanical dimensions

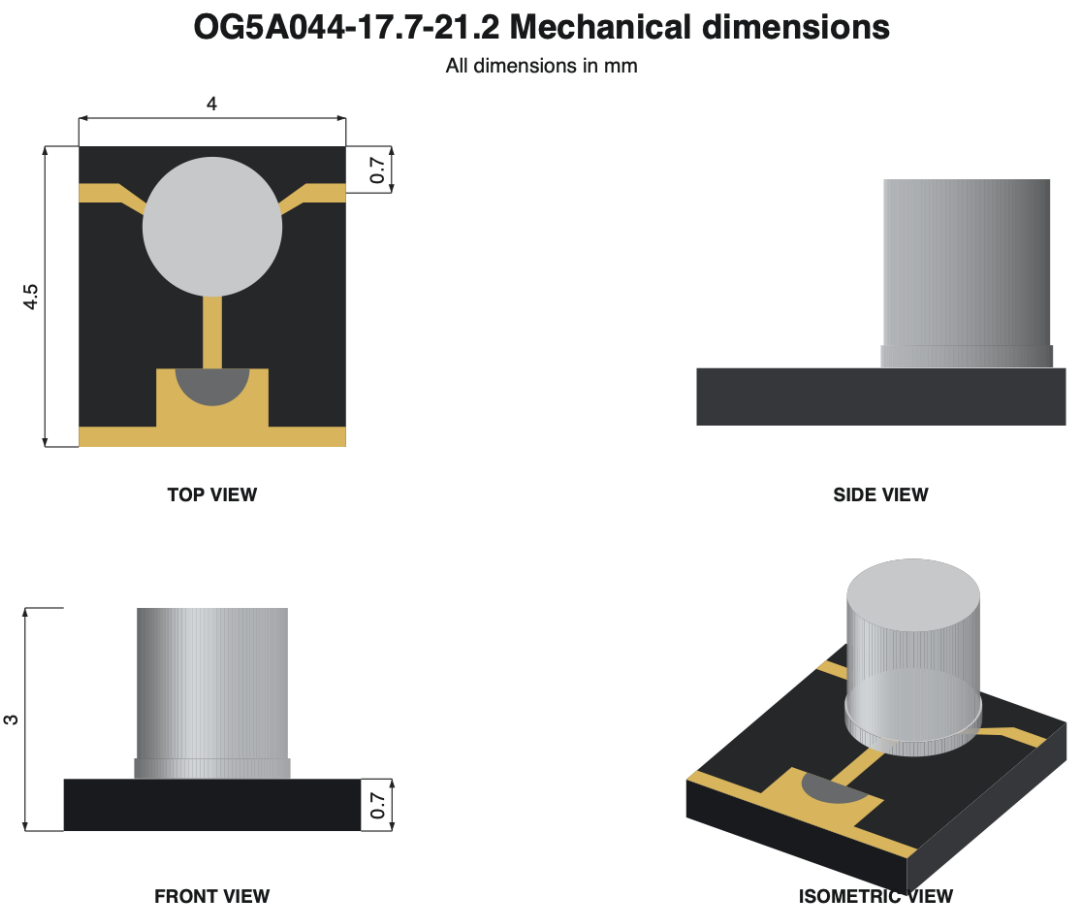

RFecho is trademark of Ocean Microwave
All rights reserved.
©RFecho 2025