
OH524C-1880-2025

Drop-in circulator

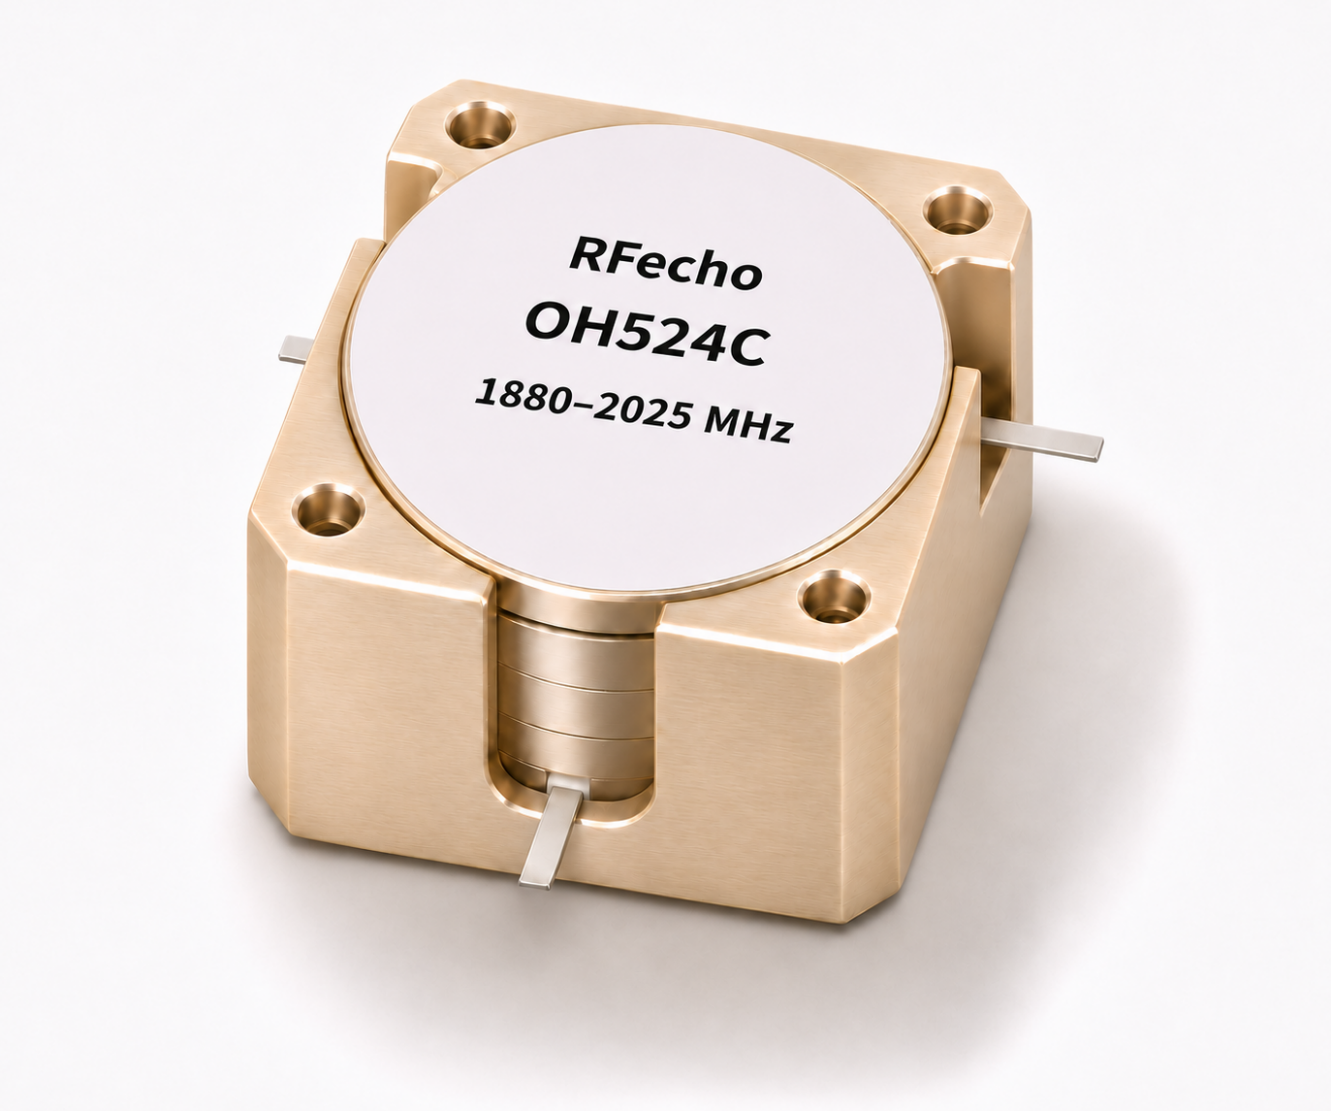


Frequency range	**1880–2025 MHz**
Insertion loss	**0.30 dB max.**
Isolation	**22 dB min.**

OH524C-1880-2025

Technical indicators

Size spec.	Part number	Frequency (MHz)	Return loss (dB)	Isolation (dB)	Insertion loss (dB)	IMD3 (dBc)	Power (W)	Operating temp. (°C)
0.75 in	OH524C	1880-2025	22	22	0.30	-65 @ 2×30 W	160	–40 to +85

Mechanical outline

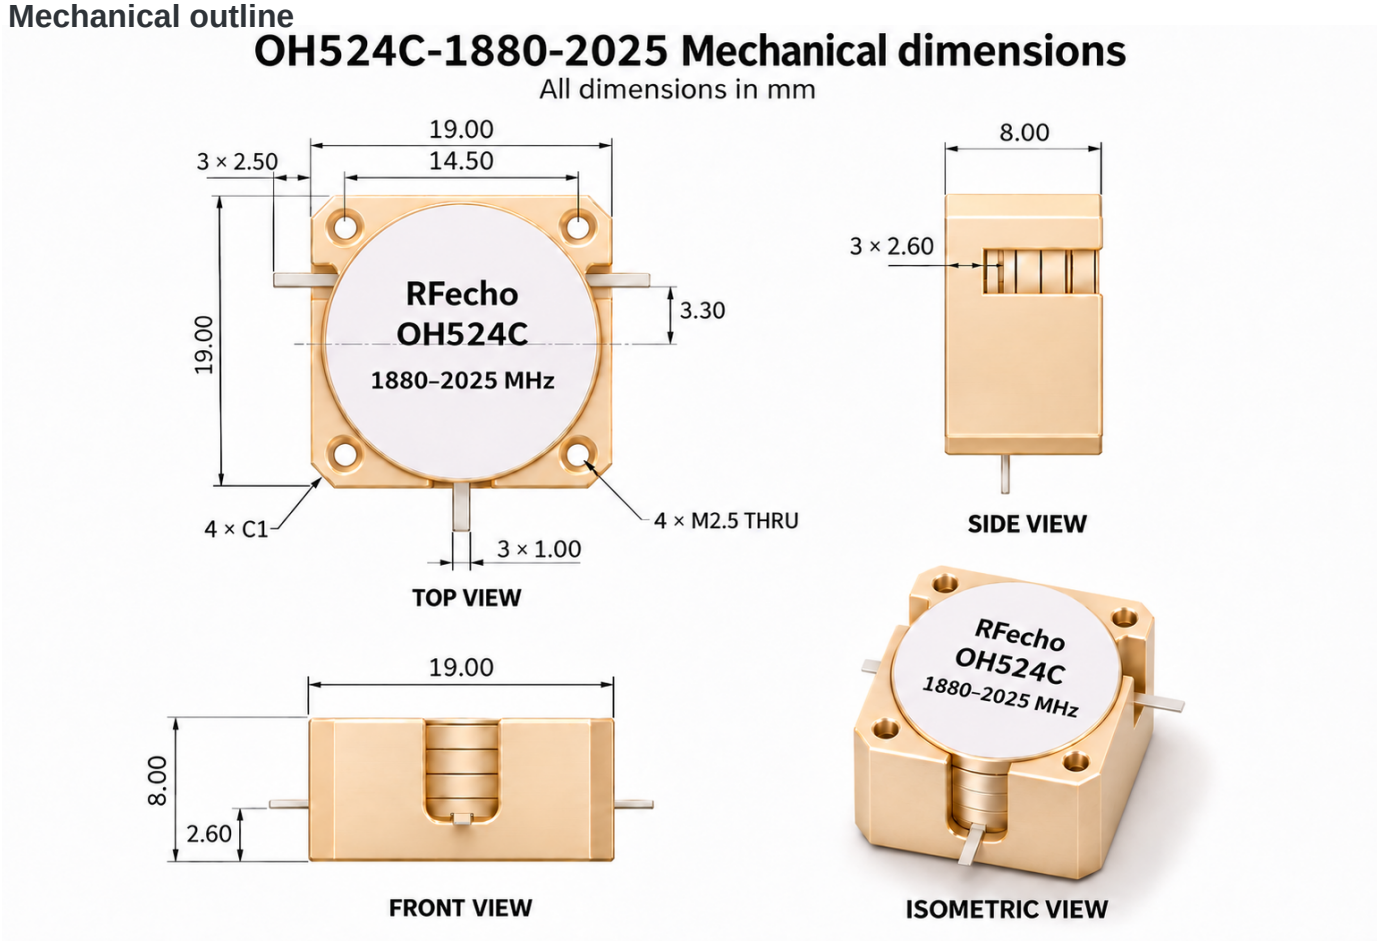

Series outline based on the approved template. Verify against the drawing for this SKU.

OH524C-1880-2025

Performance illustrations | Frequency-mapped

