OH535A-2300-2400

Drop-in circulator




Frequency range	**2300-2400 MHz**
Insertion loss	**0.25 dB max.**
Isolation	**22 dB min.**
Rated power	**160 W**

OH535A-2300-2400

Technical indicators

Size (mm)	Part number	Frequency (MHz)	Return loss (dB)	Isolation (dB)	Insertion loss (dB)	IMD3 (dBc)	Power (W)	Temperature (degC)
20 x 20	OH535A	2300-2400	22	22	0.25	-65	160	-40 to +85

IMD3 test condition: 2 x 30 W.

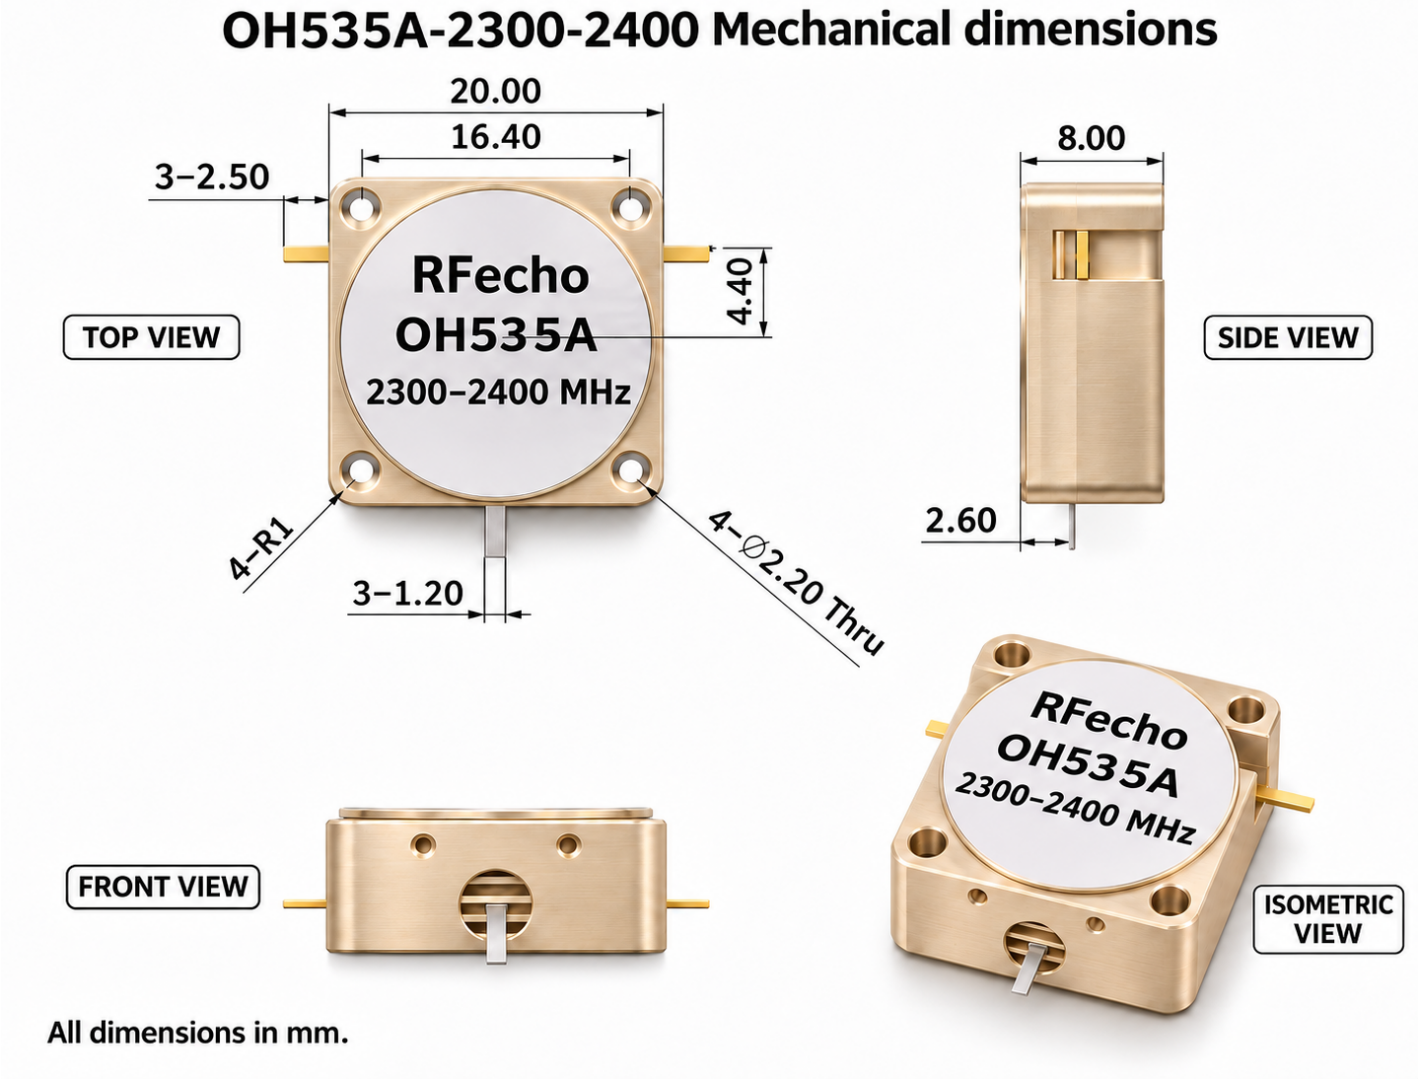

OH535A-2300-2400

Supplier reference performance plots

HYH535A catalog reference; original markers 1565 / 1586 MHz.

