




Low Noise Amplifier 17GHz~27G

Features

- Gain: 24dB Typical
- Noise Figure: 2.5dB Typical
- P1dB Output Power: +12dBm Typical
- Supply Voltage: +4V @ 75mA
- 50 Ohm Matched



Typical Applications

- Wireless Infrastructure
- Military & Aerospace
- Fiber Optics

RF Microwave & VSAT
Test Instrument

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	17		20	20		27	GHz
Gain	20	24		22	25		dB
Gain Flatness		± 1.5			± 1.0		dB
Gain Variation Over Temperature (-45°C~+85°C)		± 1.0			± 1.0		dB
Noise Figure		2.5	3.0		2.8	3.3	dB
Input VSWR		1.3	1.8		1.6	2.0	: 1
Output VSWR		1.6	2.0		1.8	2.5	: 1
Output 1dB Compression Point (P1dB)	9	11		10	12		dBm
Saturated Output Power (Psat)		13			14		dBm
Output Third Order Intercept (IP3)		18			20		dBm
Supply Current (I _{dd}) (V _{cc} =+4V)		75	100		75	100	mA
Isolation S12		-40			-35		dB

Weight	0.35 ounces	Impedance	50ohms
Input / Output Connectors	2.92mm-Female	Material	Aluminum
Finish	Standard: Gold 40 micron; Nickel 220 micron thickness	Package Sealing	Epoxy Sealing (Standard)
	Option: Gold 80 micron; Nickel 180 micron thickness		Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+5.5V
RF Input Power (RFIN)	-5dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +4V biasing

Power OFF Procedure

Step 1	Turn off +4V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-45°C~+85°C
Storage Temperature	-55°C~+125°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

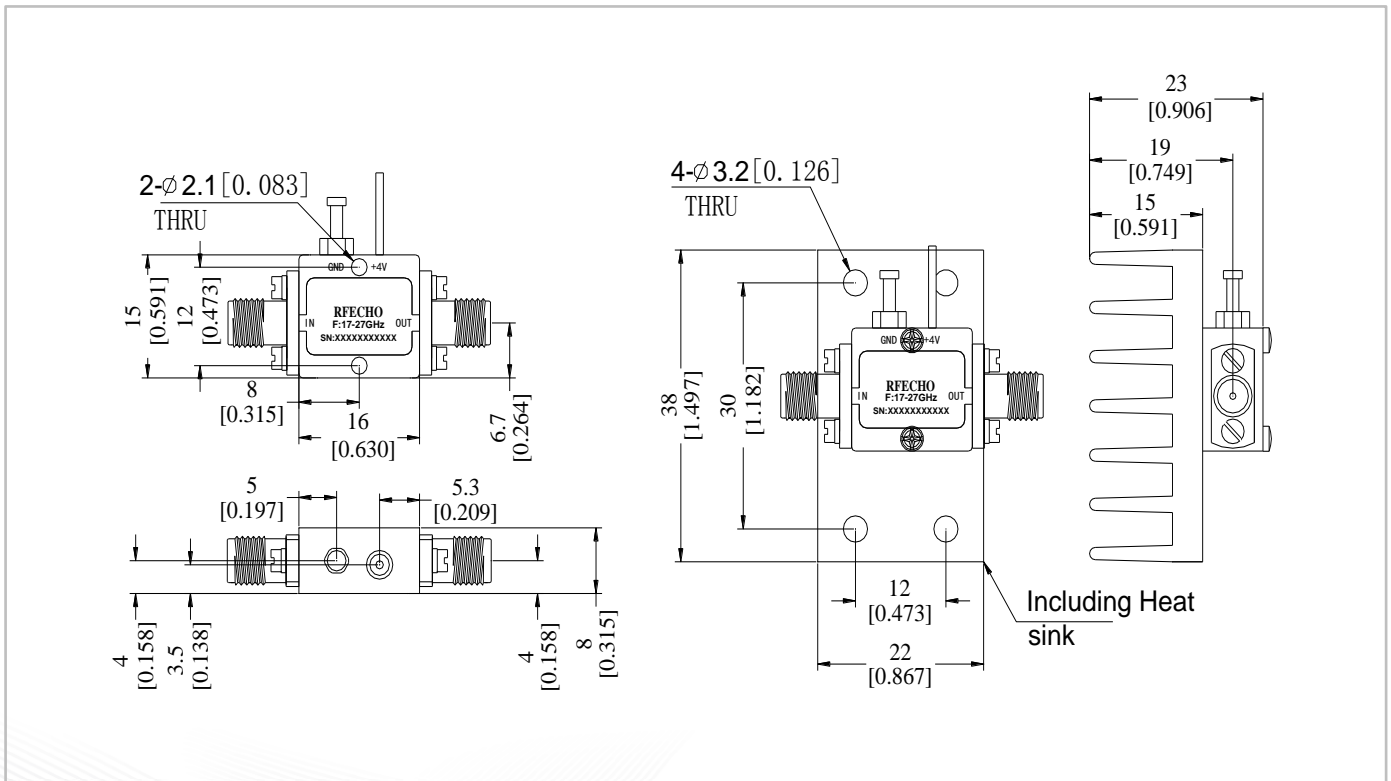





Gain @+25°C

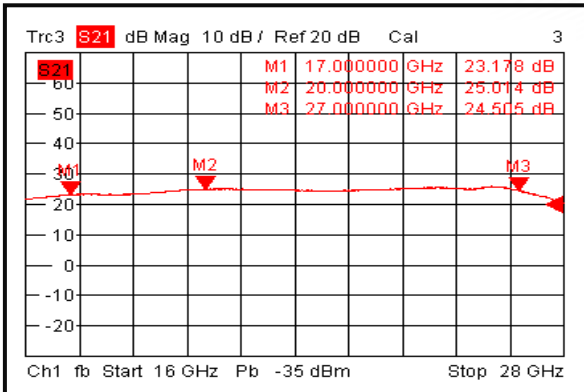


Input VSWR @+25°C

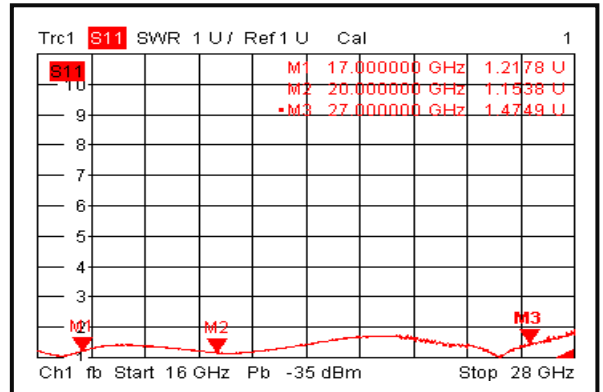


Output VSWR @+25°C

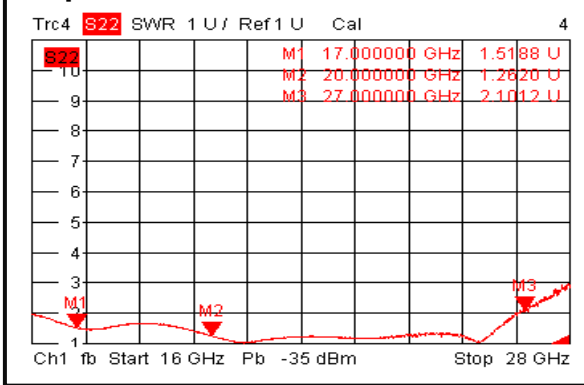


Isolation @+25°C

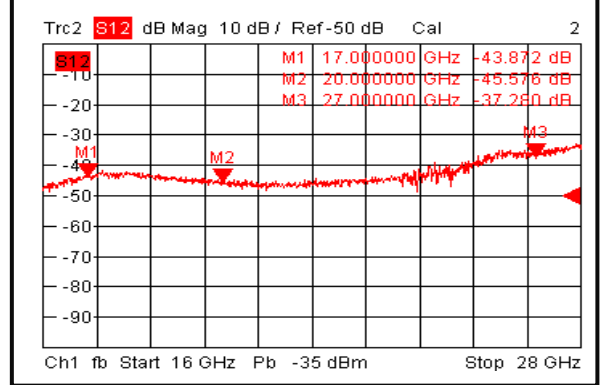


Gain @-45°C

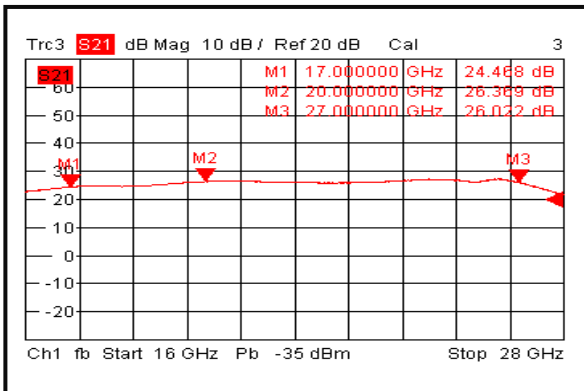


Input VSWR @-45°C

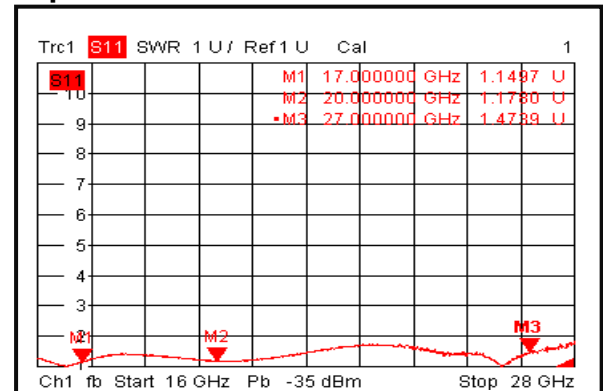

Output VSWR @-45°C

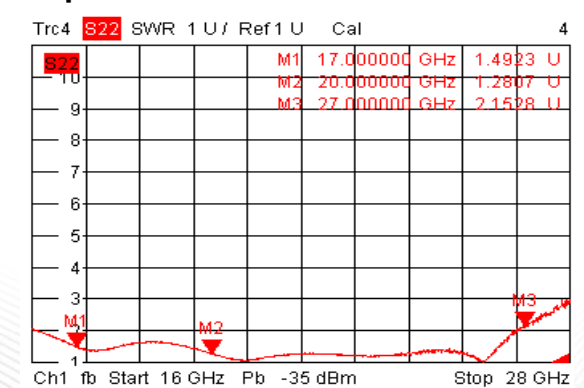


Isolation @-45°C

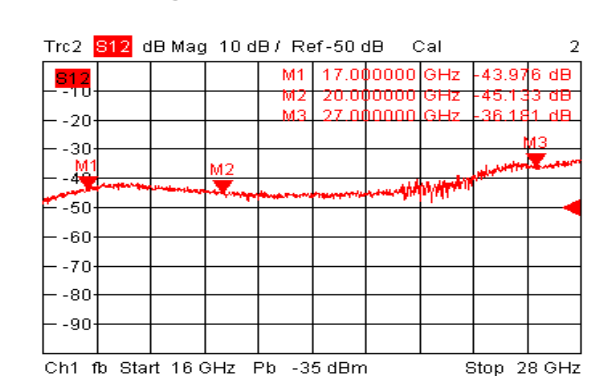





Gain @+85°C

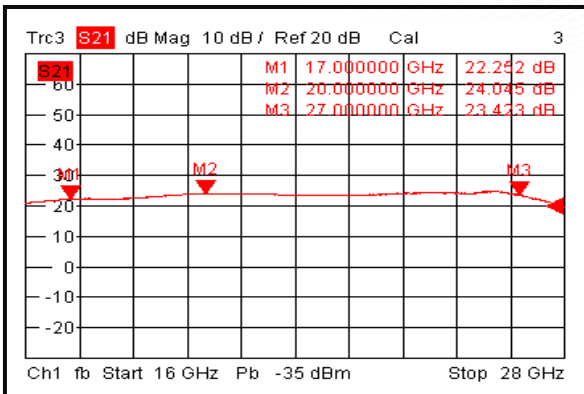


Input VSWR @+85°C

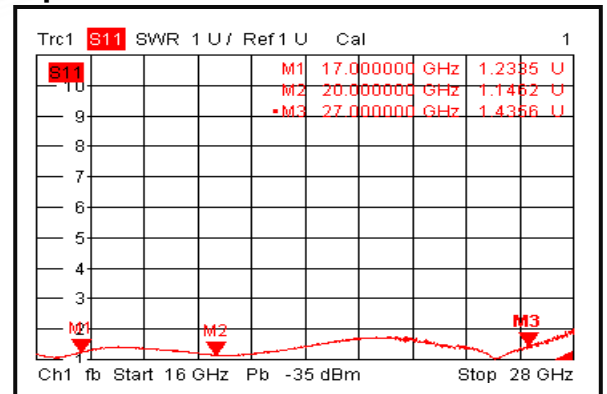


Output VSWR @+85°C

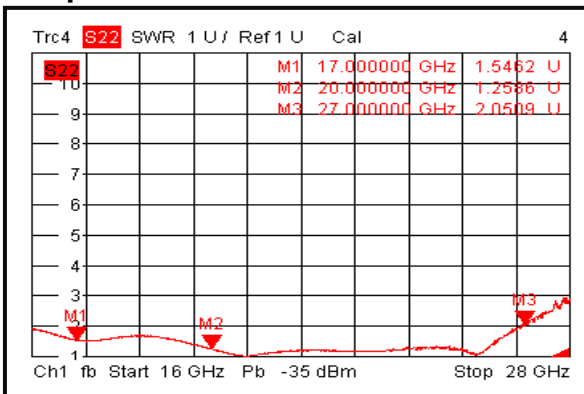


Isolation @+85°C

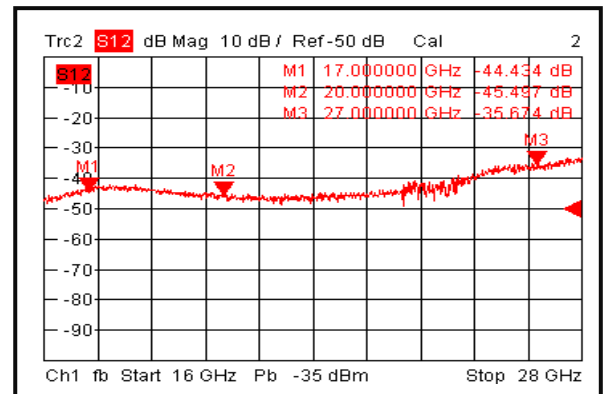


Gain vs. Output Power

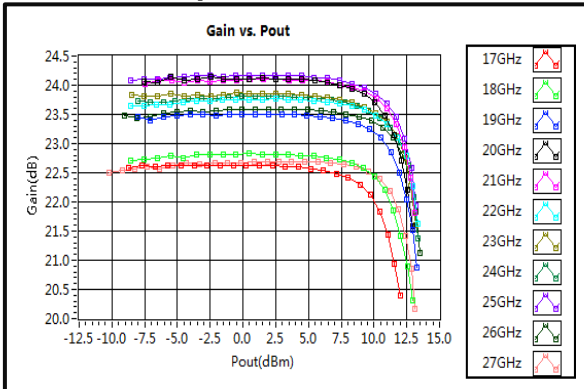


P1dB vs. Frequency

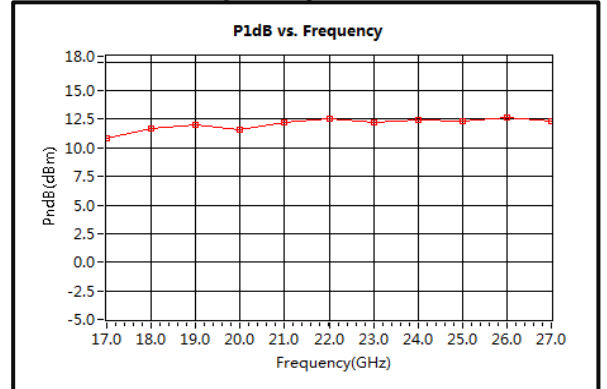

Output Third Order Intercept (IP3)

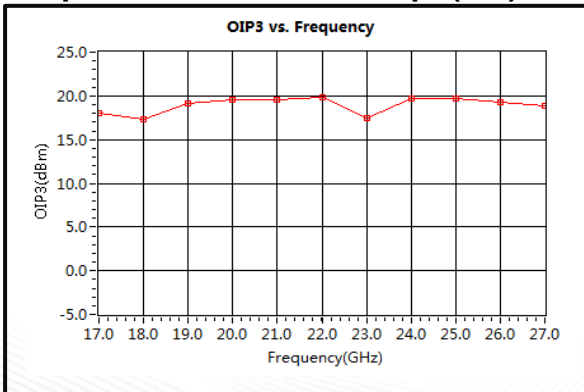


Saturation Power vs. Frequency

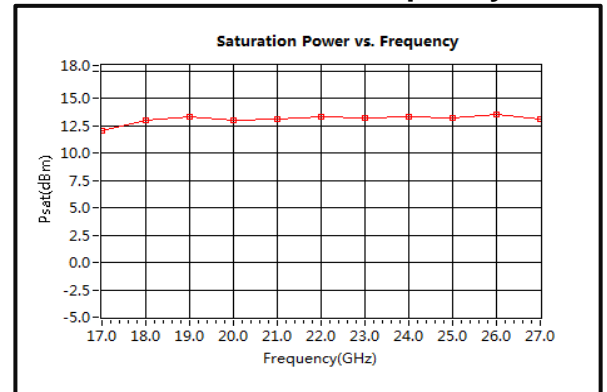



Noise Figure

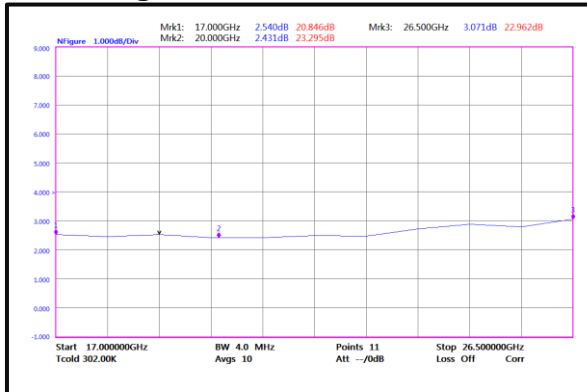

2nd Harmonic Wave Output Power

