




# Low Noise Amplifier 2.3GHz~2.7GHz

## Features

- Functional Bandwidth : 0.5 - 4GHz
- Gain: 21dB Typical
- Noise Figure: 0.7dB Typical
- P1dB Output Power: +19dBm Typical
- Supply Voltage: +5V

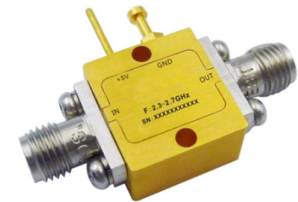

## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	2.3		2.7	0.5		4	GHz
Gain	18	21	24	17	23	26	dB
Gain Flatness		±0.5	±1.0		±2.5	±3.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±0.5			±0.5		dB
Noise Figure		0.7	1.1		0.8	1.5	dB
Input VSWR		2.1	2.5		2.0	3.0	: 1
Output VSWR		1.1	1.5		1.8	2.2	: 1
Output 1dB Compression Point (P1dB)	15	19		14	20		dBm
Saturated Output Power (Psat)		20			21		dBm
Output Third Order Intercept (OIP3)		35			35		dBm
Supply Current (Vcc=+5V)		65	100		65	100	mA
Isolation S12		-30			-30		dB

Weight	0.35 ounces	Impedance	50ohms
Input / Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Optional)



### Absolute Maximum Ratings

Operating Voltage	+7V
RF Input Power @ 50Ω, T=25° C	+33dBm

### Biassing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +5V biasing

### Power OFF Procedure

Step 1	Turn off +5V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


### Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

### Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

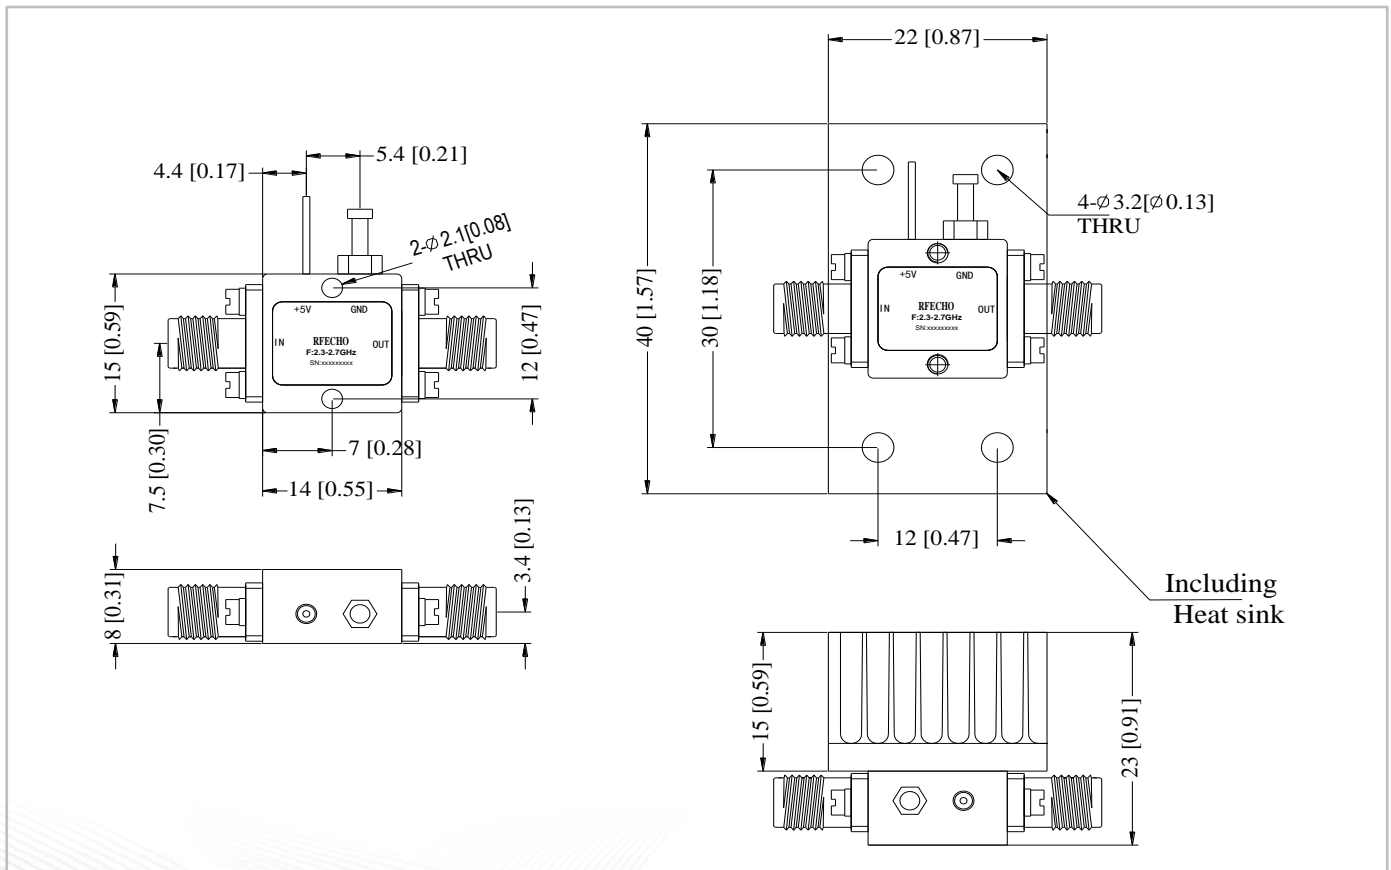





### Gain @+25°C

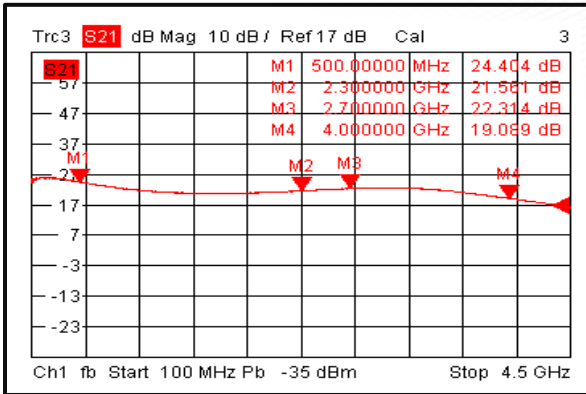


### Input VSWR @+25°C

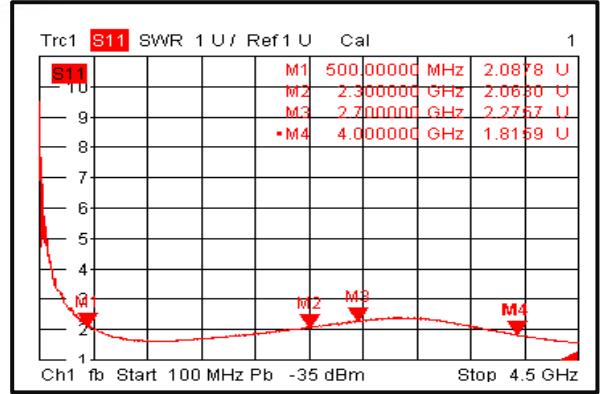


### Output VSWR @+25°C

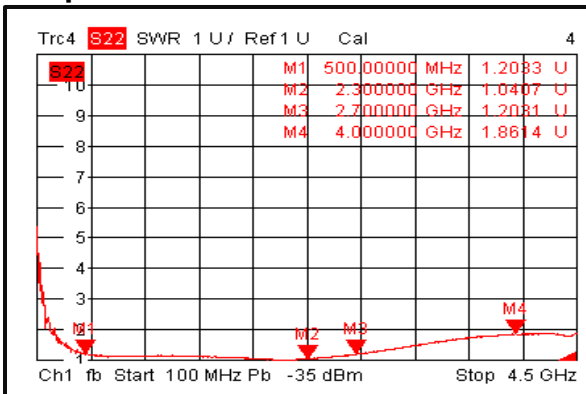


### Isolation @+25°C

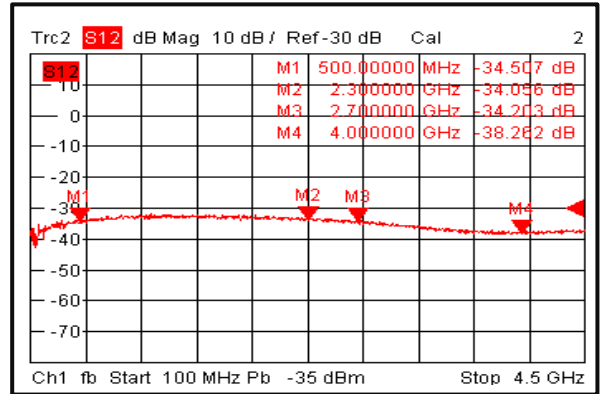


### Gain @-40°C

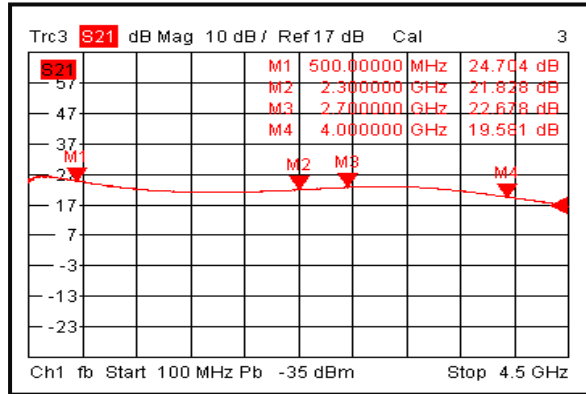


### Input VSWR @-40°C

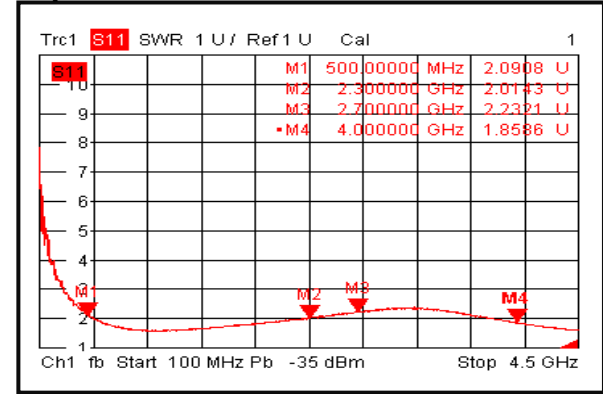

### Output VSWR @-40°C

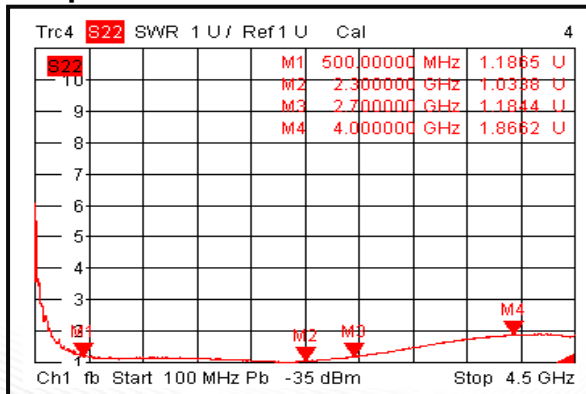


### Isolation @-40°C

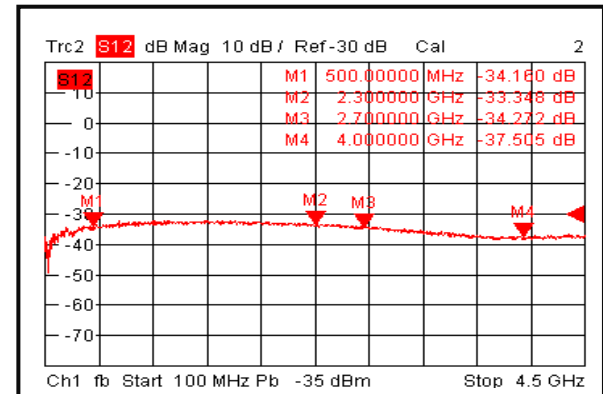





### Gain @+85°C

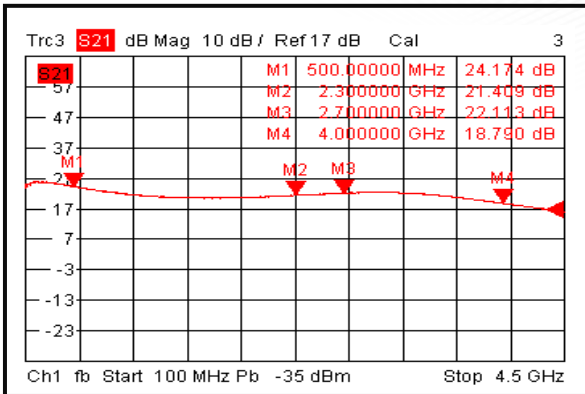


### Input VSWR @+85°C

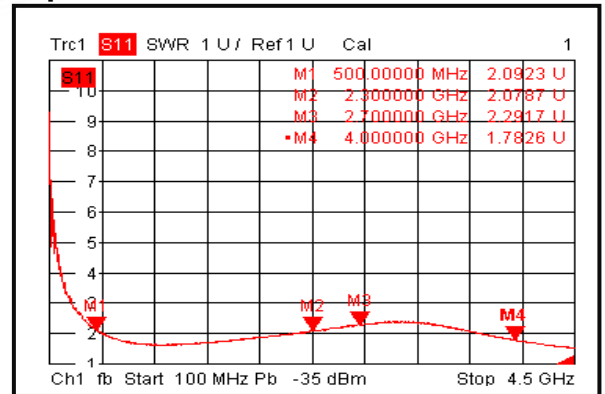


### Output VSWR @+85°C

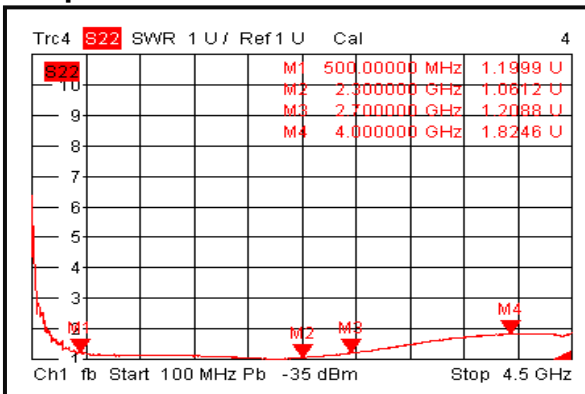


### Isolation @+85°C

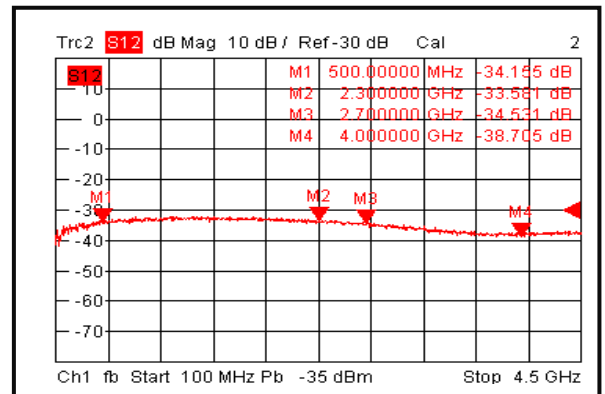


### Gain vs. Output Power

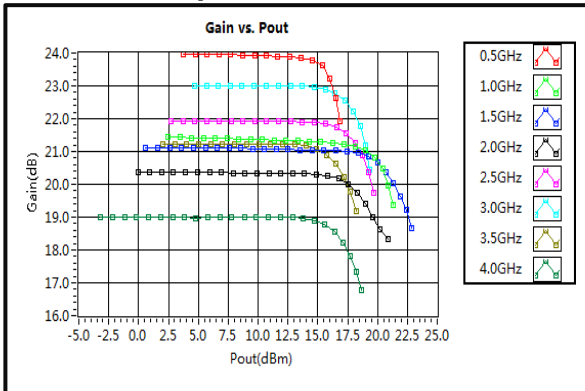


### P1dB vs. Frequency

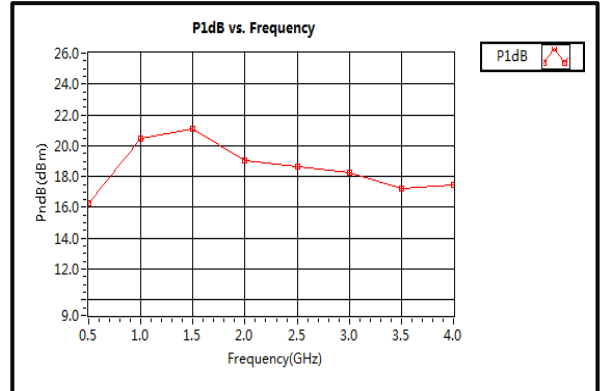

### Output Third Order Intercept (OIP3)

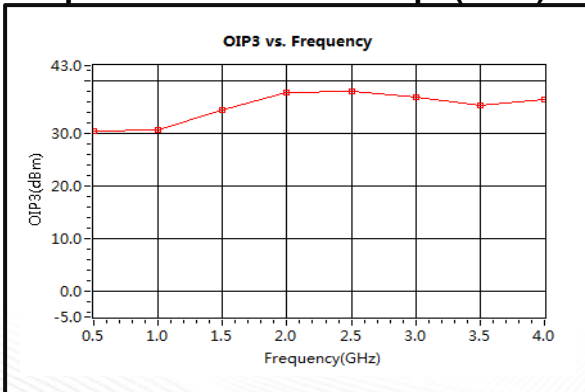


### Saturation Power vs. Frequency

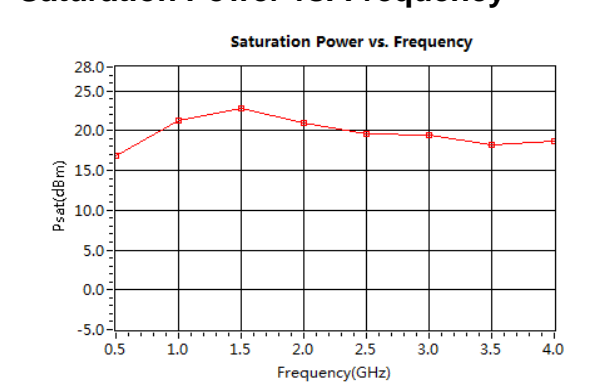





### Noise Figure

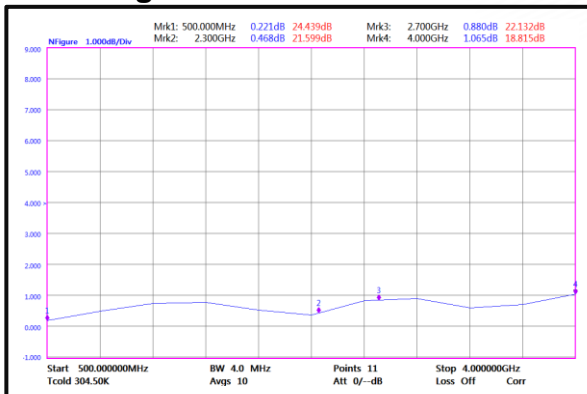

### 2nd Harmonic Wave Output Power

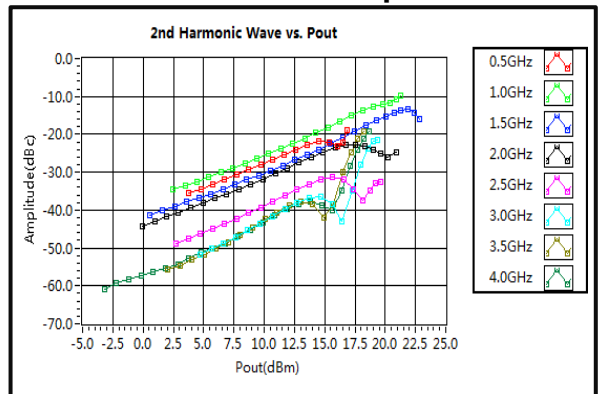

### 3rd Harmonic Wave Output Power

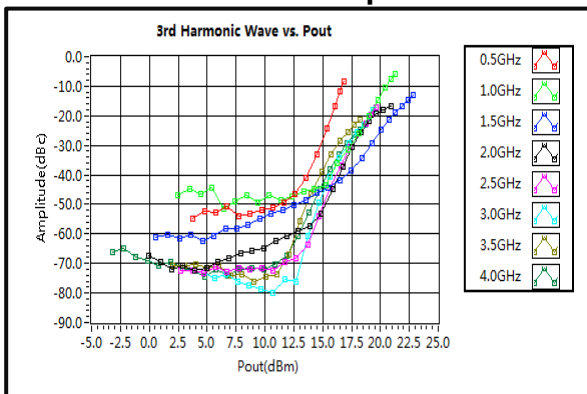

### 4th Harmonic Wave Output Power

