



Low Noise Amplifier 3.5GHz~7GHz



Features

- Gain: 16.5dB Typical
- Noise Figure: 2.0dB Typical
- P1dB Output Power: +16dBm Typical
- Supply Voltage: +5V
- 50 Ohm Matched Input / Output

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.
Frequency Range	3.5		7	GHz
Gain	16	16.5		dB
Gain Flatness		±0.5	±0.8	dB
Gain Variation Over Temperature (-40°C~+85°C)			±1.5	dB
Noise Figure		2.5	3.2	dB
Input VSWR		1.9		: 1
Output VSWR		2.0		: 1
Output 1dB Compression Point (P1dB)	14	16		dBm
Saturated Output Power (Psat)		19		dBm
Output Third Order Intercept (OIP3)		28		dBm
Supply Current (Vcc=+5V)		60	70	mA
Isolation S12		-25		dB

Weight	1.06ounces	Impedance	50 ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)

Absolute Maximum Ratings

Operating Voltage	+6V
RF Input Power (RFIN)	+20dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +5V biasing

Power OFF Procedure

Step 1	Turn off +5V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

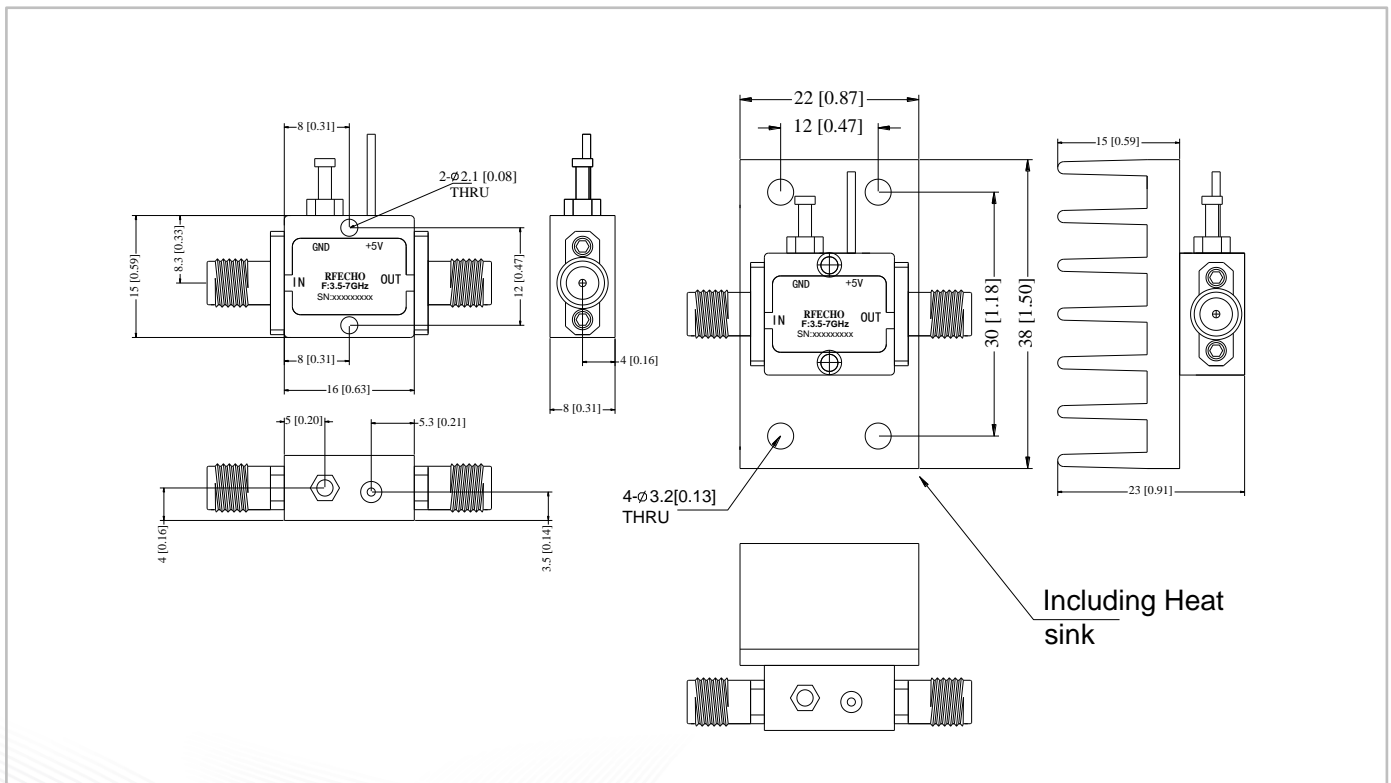





Gain @+25°C

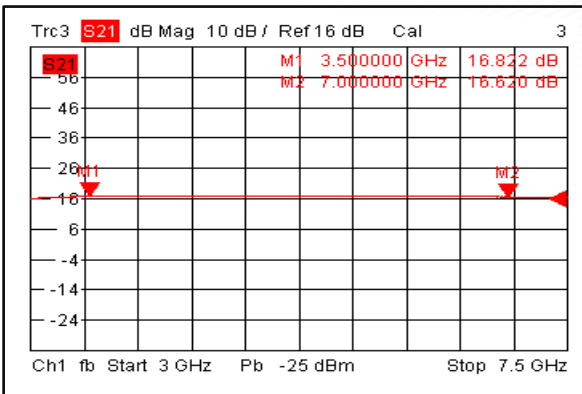


Input VSWR @+25°C

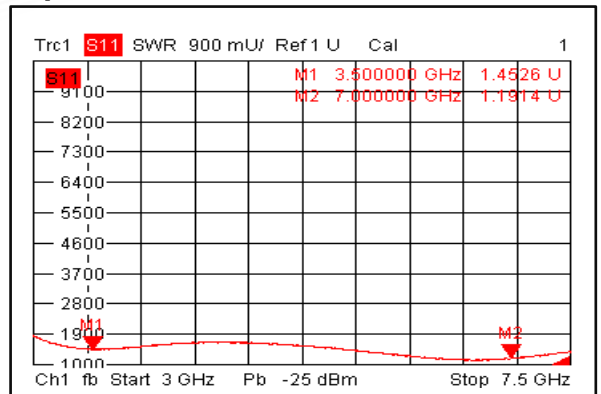


Output VSWR @+25°C

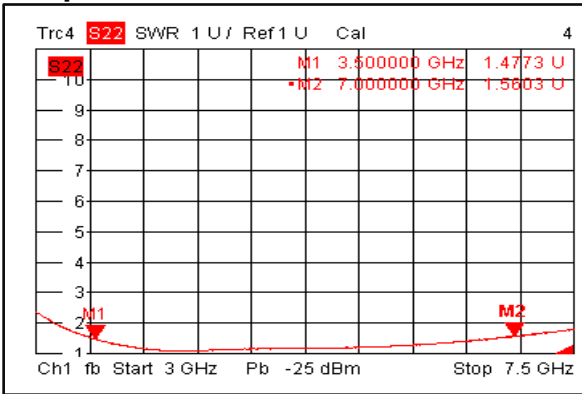


Isolation @+25°C

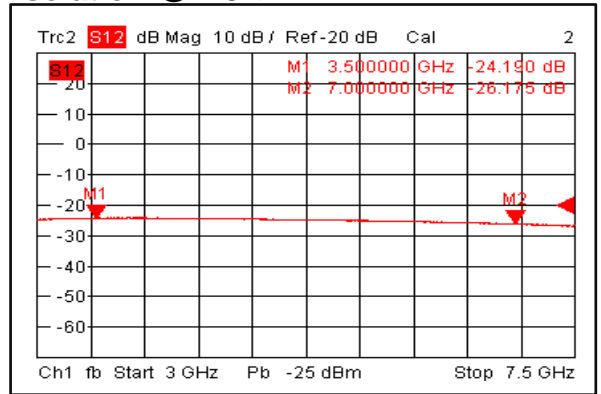


Gain @-40°C

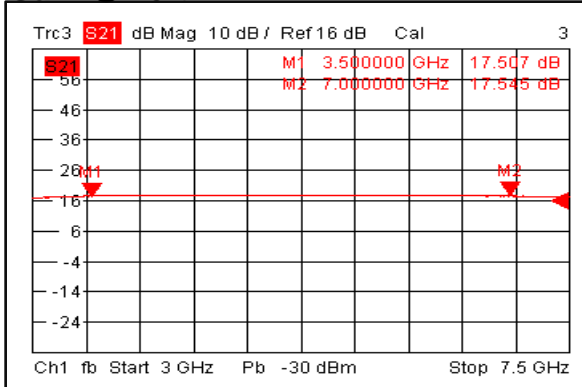


Input VSWR @-40°C

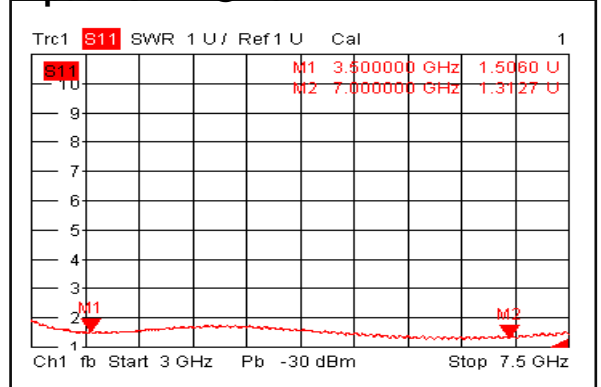

Output VSWR @-40°C

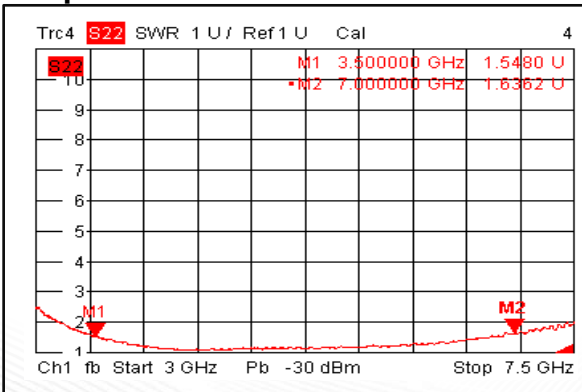


Isolation @-40°C

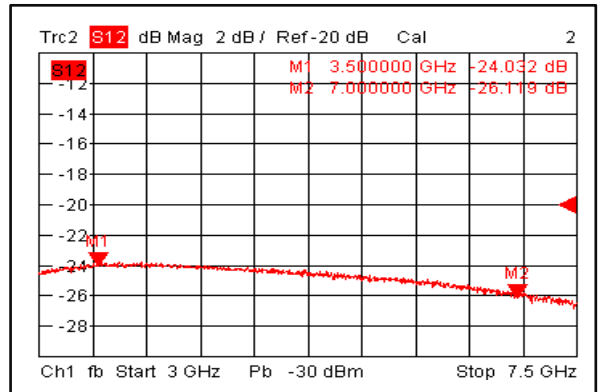





Gain @+85°C

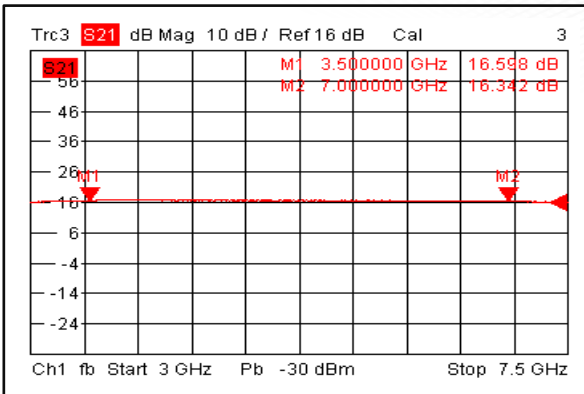


Input VSWR @+85°C

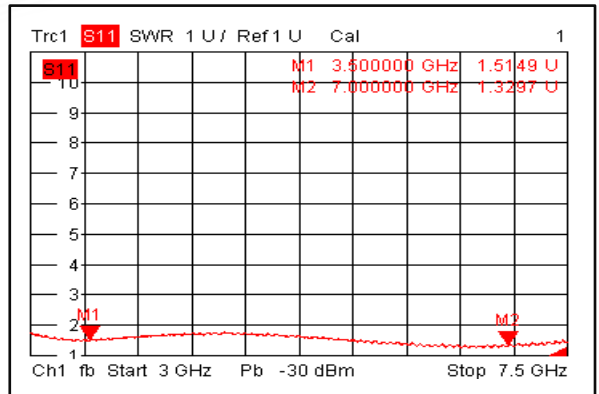


Output VSWR @+85°C

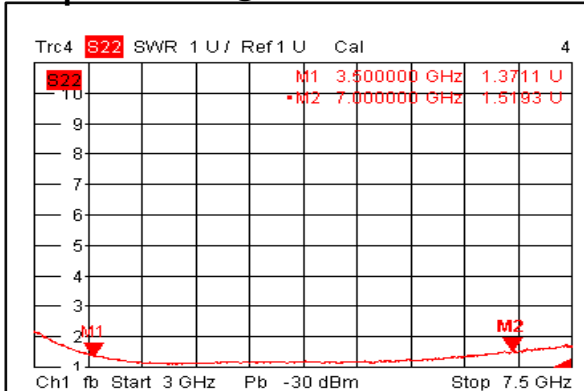


Isolation @+85°C

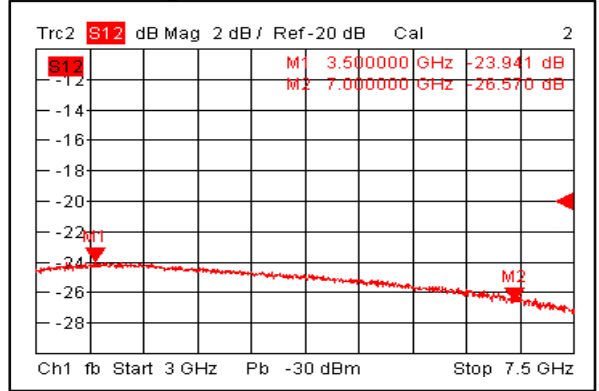


Gain vs. Output Power

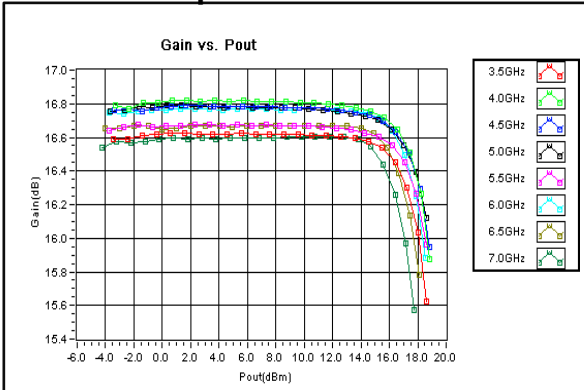


P1dB vs. Frequency

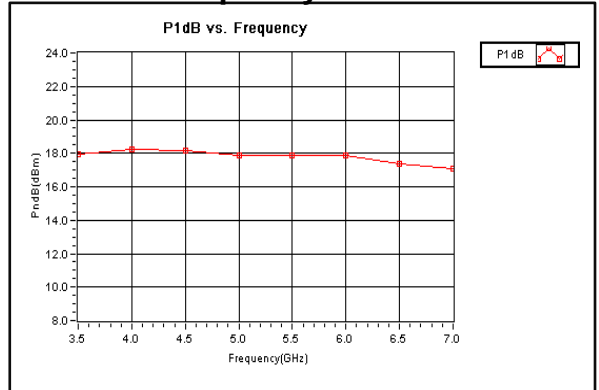

Noise Figure(3.5-4GHz)

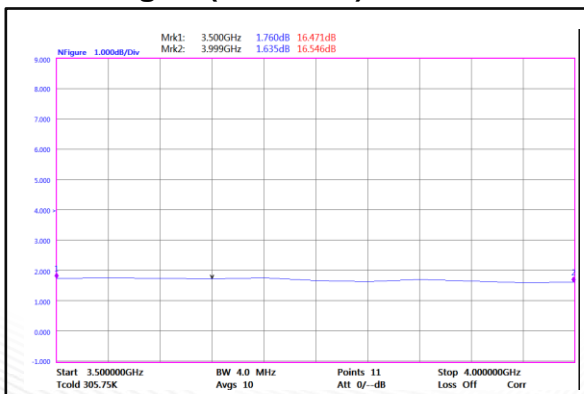


Noise Figure(4-7GHz)

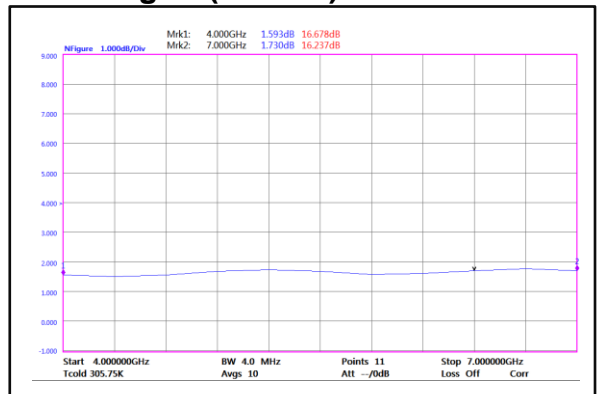




2nd Harmonic Wave Output Power

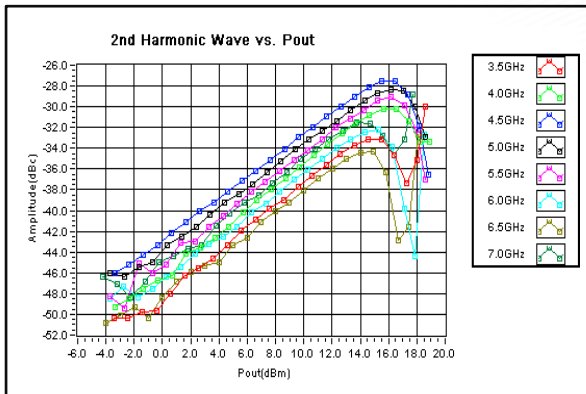

3rd Harmonic Wave Output Power

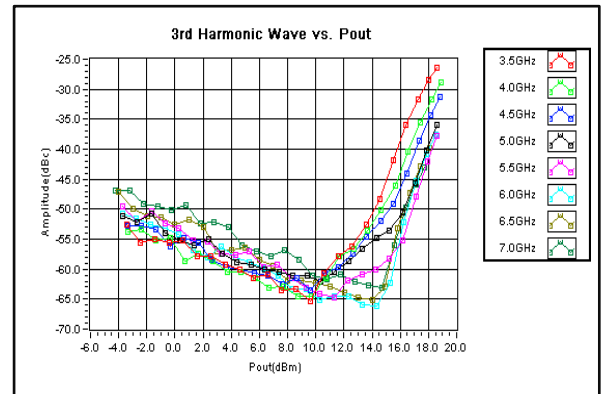

4th Harmonic Wave Output Power

