




# Wide Band Low Noise Amplifier 2GHz~18GHz

## Features

- Gain: 33dB Typical
- Noise Figure: 2.5dB Typical
- P1dB Output Power: +25dBm Typical
- Supply Voltage: +12V @ 320 mA
- 50 Ohm Matched Input / Output
- Size: 1.58x 1.18" x 0.39"



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	2		15	15		18	GHz
Gain	30	33		28.5	31		dB
Gain Flatness		±1.5	±2.0		±1.0	±1.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±1.0			±1.0		dB
Noise Figure		2.5	4.0		2.8	3.5	dB
Input VSWR		1.4	1.8		1.5	1.8	:1
Output VSWR		1.6	1.8		1.6	2.0	:1
Output Power for 1 dB Compression (P1dB)	22	26		20	23.5		dBm
Saturated Output Power (Psat)		27			24.5		dBm
Output Third Order Intercept (OIP3)		36			34		dBm
Isolation S12		-65			-55		dB
Supply Current (Idd) (Vcc=+12V)		320	380		320	380	mA

Weight	1.41 ounces	Impedance	50ohms
Input / Output Connectors	SMA-male/SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



### Absolute Maximum Ratings

Operating Voltage	+12V ± 10%
RF Input Power (RFIN)	+3dBm

### Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

### Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


### Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

### Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

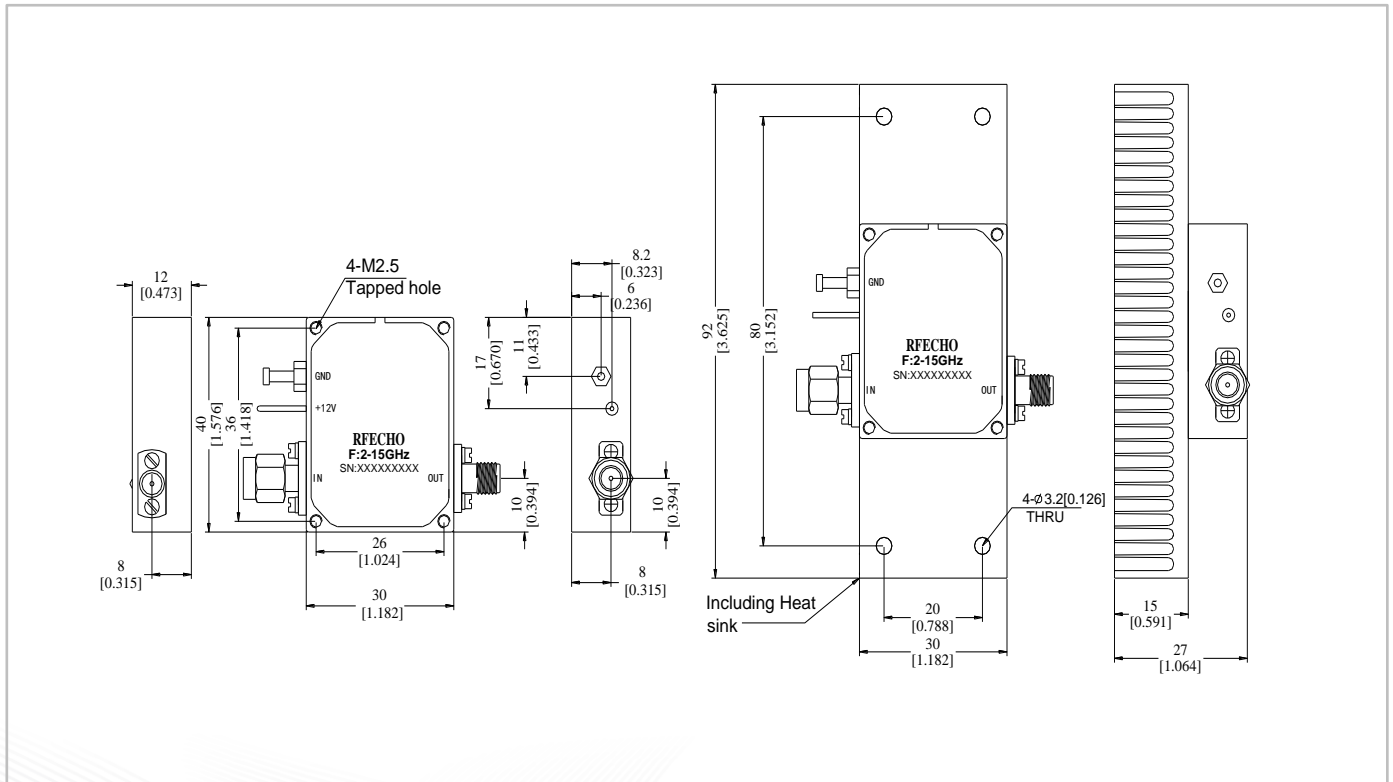





### Gain

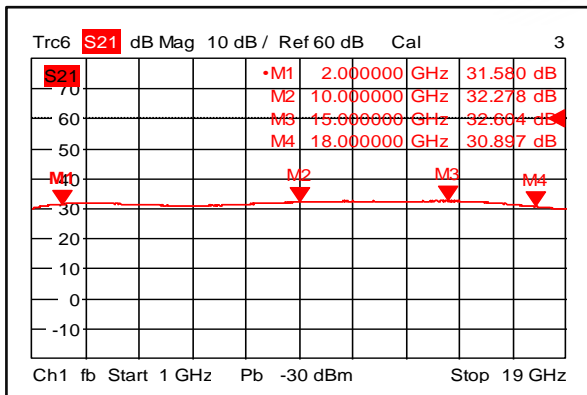


### Input VSWR

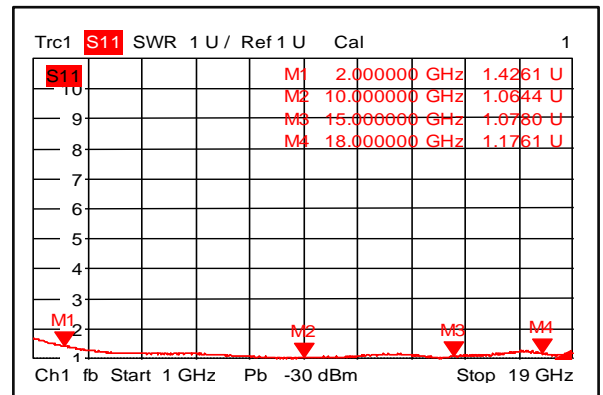


### Output VSWR

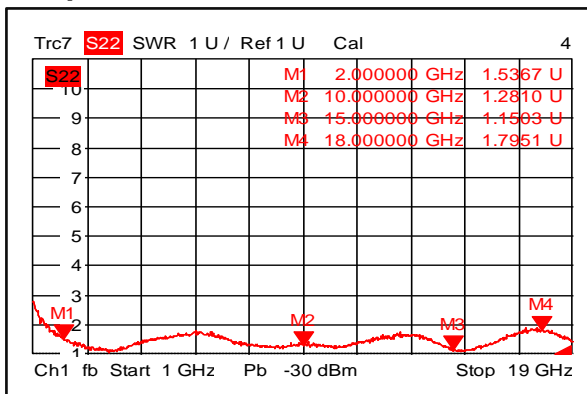


### Isolation

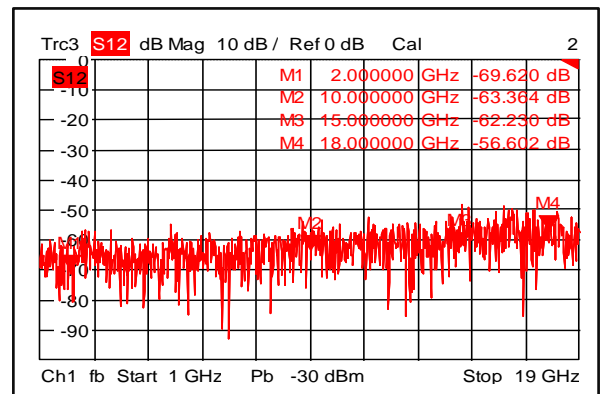

### Gain vs. Output Power

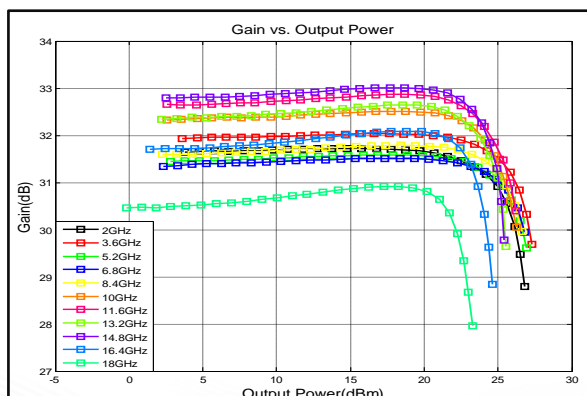


### P1dB vs. Frequency

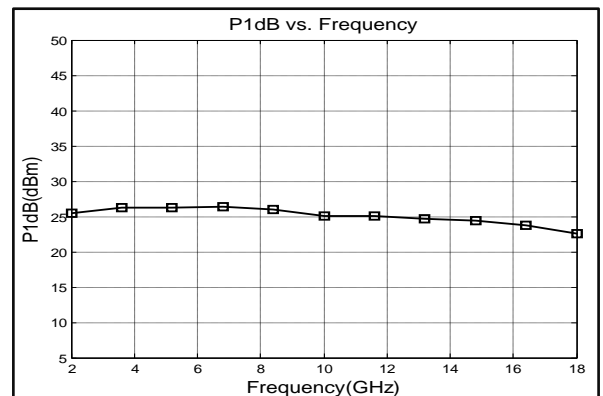





## Output Third Order Intercept (OIP3)

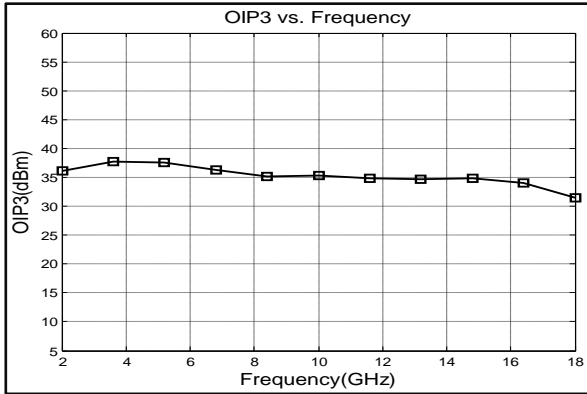


## Noise Figure

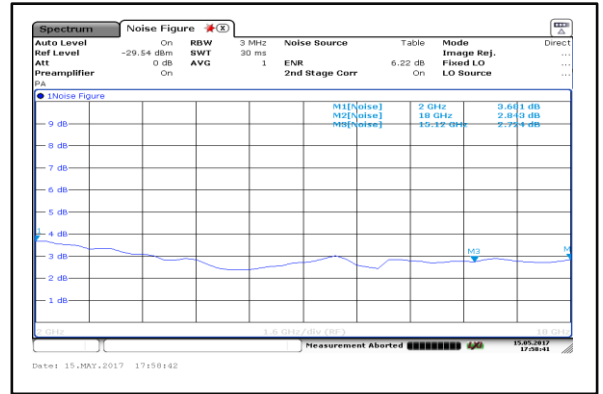

## 2nd Harmonic Wave Output Power

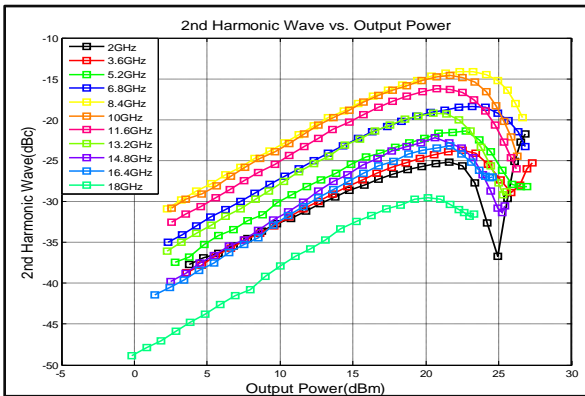

## 3rd Harmonic Wave Output Power

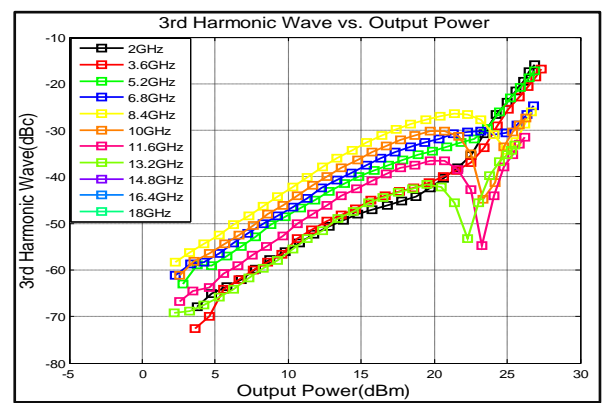

## 4th Harmonic Wave Output Power

