




Wide Band Low Noise Amplifier 17GHz~21.2GHz

Features

- Gain: 36dB typical
- Noise Figure: 2.2dB typical
- P1dB: +10dBm typical
- Supply Voltage: +5V @ 135mA
- 50 Ohm Matched

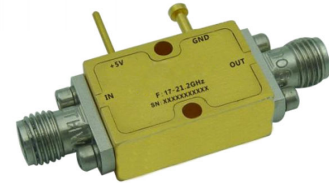

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	17		22	22		26	GHz
Gain	35	36		30	35		dB
Gain Flatness		±1.5			±2		dB
Gain Variation Over Temperature (-40°C~+85°C)		±1.0	±1.5		±1.0	±1.5	dB
Noise Figure		2.2	2.8		2.4	3.5	dB
Input VSWR		1.5	1.8		1.5	2.0	: 1
Output VSWR		1.8	2.0		1.8	2.0	: 1
Output 1dB Compression Point (P1dB)	9	12		9	12		dBm
Saturated Output Power (Psat)		14			14		dBm
Output Third Order Intercept (OIP3)		24			24		dBm
Supply Current (Vcc =+5V)		150	180		150	180	mA
Isolation S12		-65			-60		dB

Weight	0.35ounces (Max.)	Impedance	50ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+5.5V
RF Input Power(RFIN)	-15dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +5V biasing

Power OFF Procedure

Step 1	Turn off +5V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

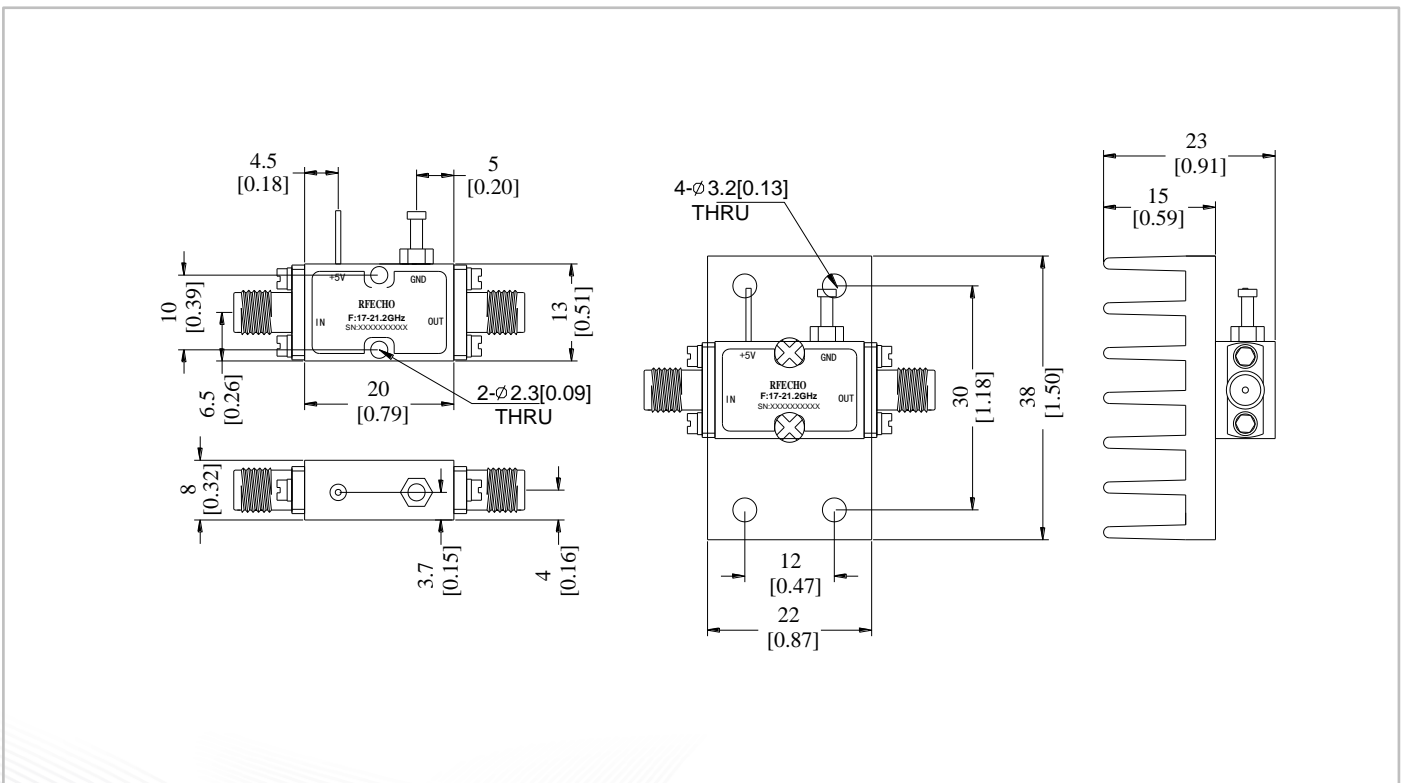





Gain @+25°C

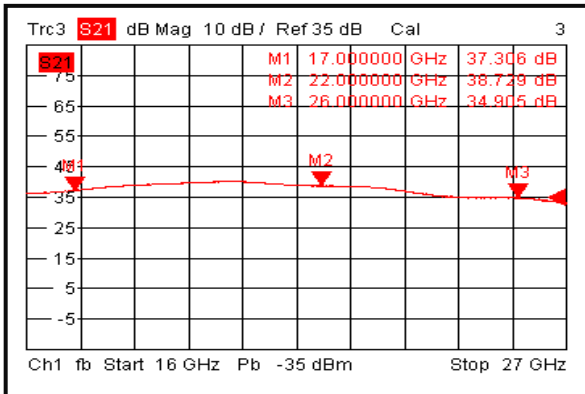


Input VSWR @+25°C

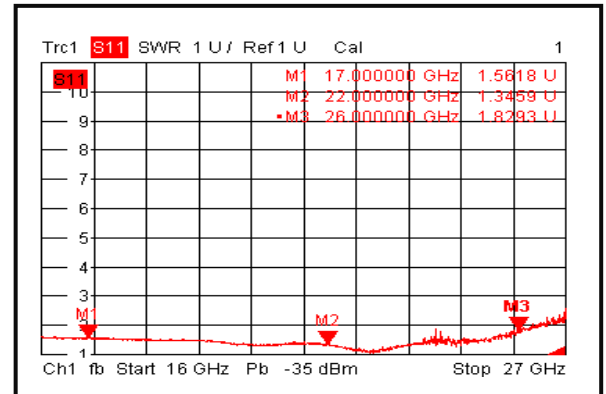


Output VSWR @+25°C

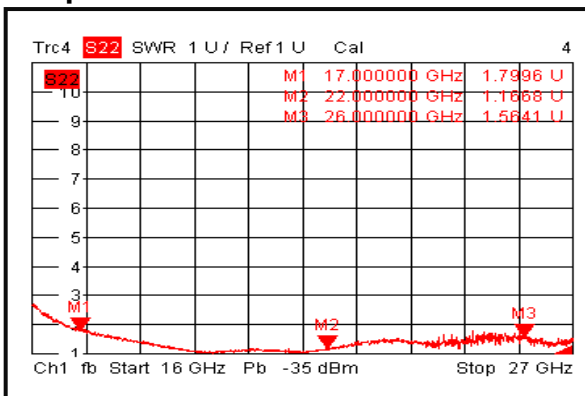


Isolation @+25°C

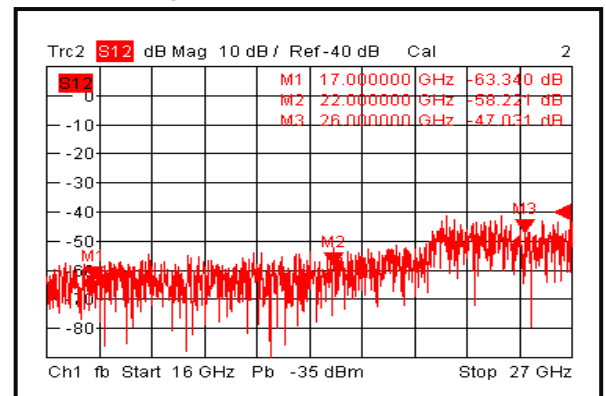

Gain @-40°C

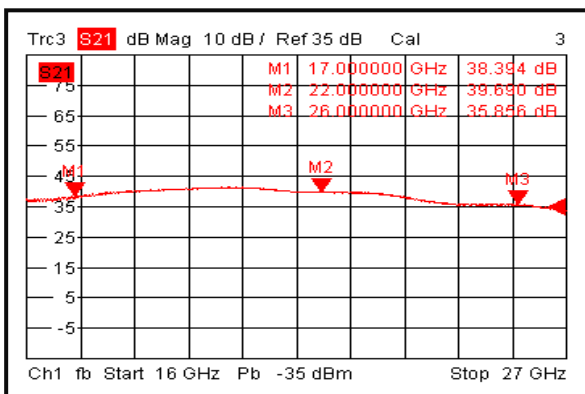


Input VSWR @-40°C

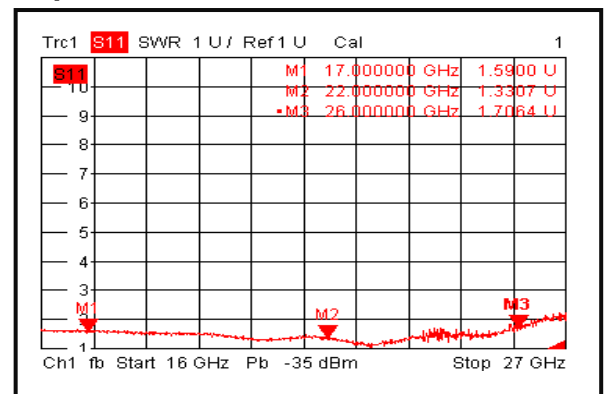





Output VSWR @-40°C

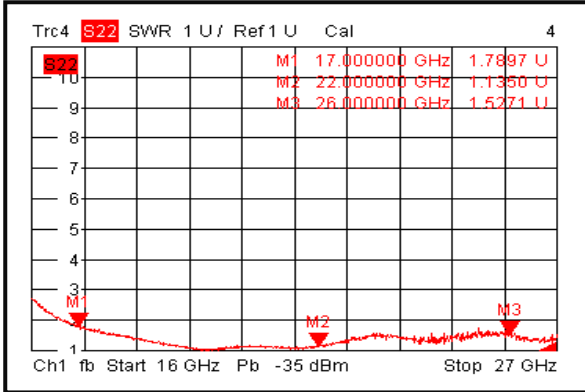


Isolation @-40°C

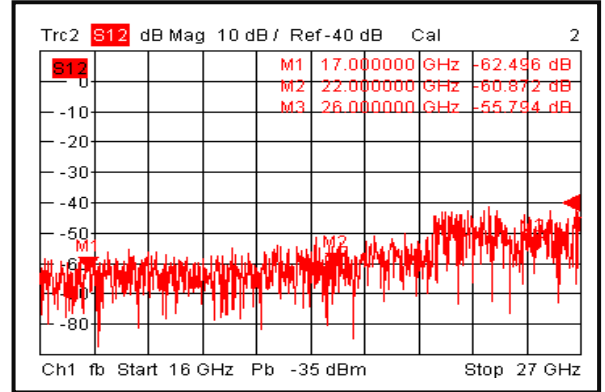


Gain @+85°C

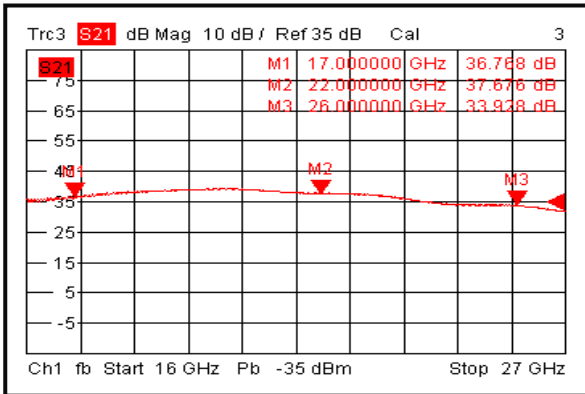


Input VSWR @+85°C

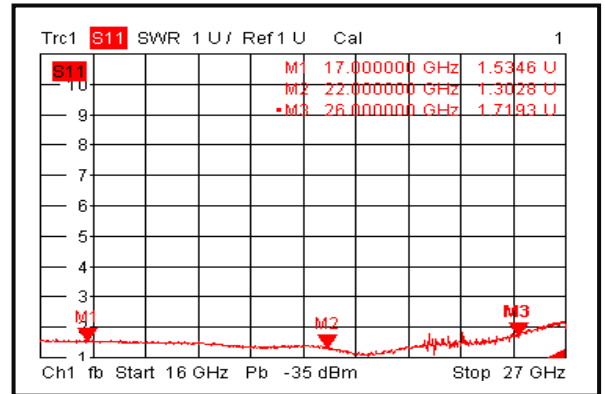

Output VSWR @+85°C

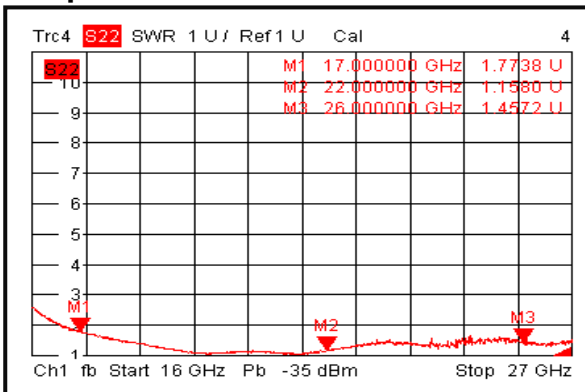


Isolation @+85°C

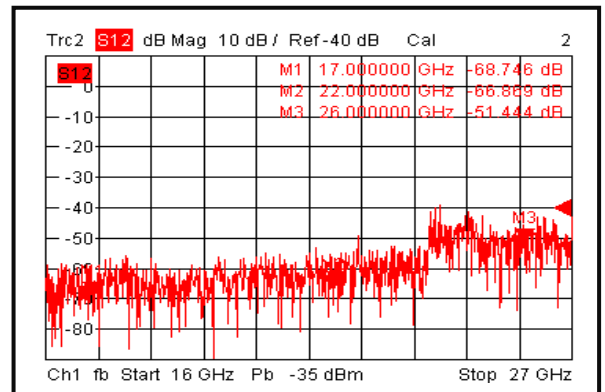





Gain vs. Output Power

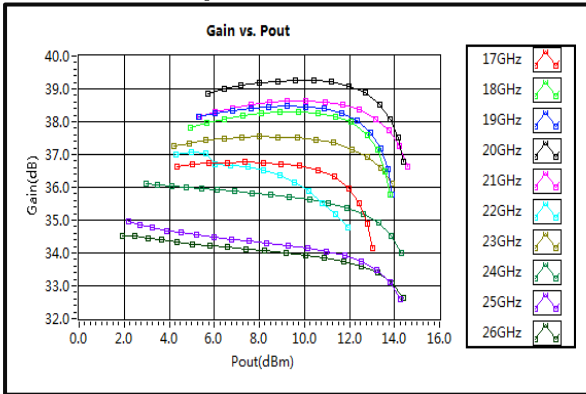


P1dB vs. Frequency

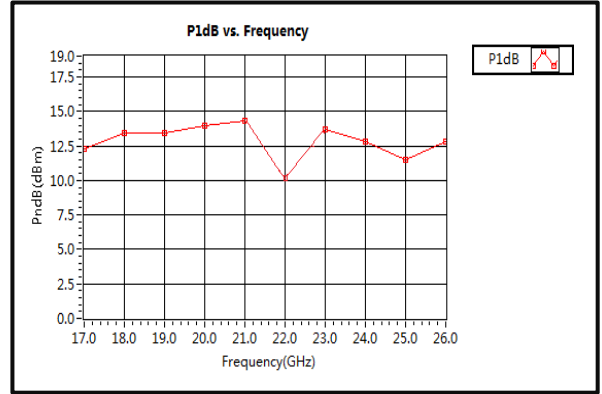

Saturation Power vs. Frequency

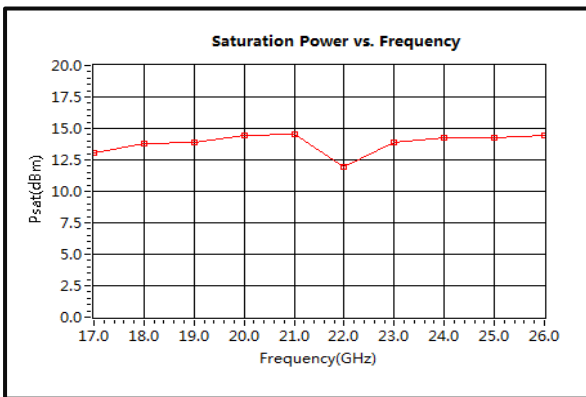

Output Third Order Intercept (OIP3)

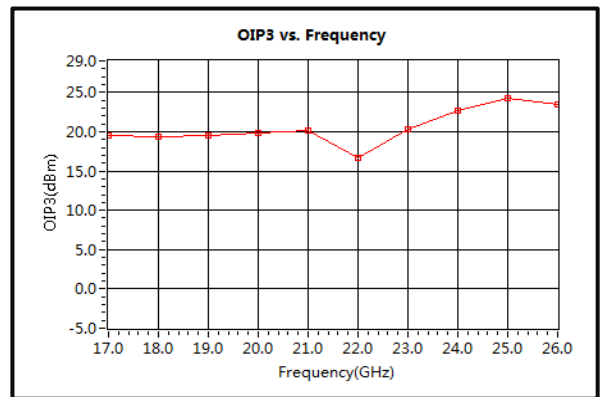

Noise Figure

