

Ultra Wide Band Low Noise Amplifier 1GHz~40GHz

Features

- Gain: 43dB Typical
- Noise Figure: 4.0dB Typical
- P1dB Output Power: +22dBm Typical
- Supply Voltage: +12V @ 500mA
- 50 Ohm Matched Input / Output
- Size: 1.26" x 1.77" x0.53"



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	1		18	18		40	GHz
Gain	40	43	48	39	43	48	dB
Gain Flatness		±2.0	±3.0		±3.0	±3.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±2.0			±3.0		dB
Noise Figure		4.0	6.0		5.5		dB
Input VSWR		1.5	2.5		2.0	3.0	: 1
Output VSWR		1.5	2.5		2.0	3.0	: 1
Output 1dB Compression Point (P1dB)	18	22		16	20		dBm
Saturated Output Power (Psat)		23			22		dBm
Output Third Order Intercept (OIP3)		30			25		dBm
Supply Current (Idd) (Vdd=+12V)		500	650		500	650	mA
Isolation S12		-70			-60		dB

Weight	2.0 Ounces (Max.)	Impedance	50ohms
Input / Output Connectors	2.92mm-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)

Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power (RFIN)	@1-18GHz -15dBm @18-40GHz -5dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground

Environmental Specifications


Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Tolerances ± 0.1 (0.004)(Excl heatsink)


Heat Sink required during operation(Sold Separately)

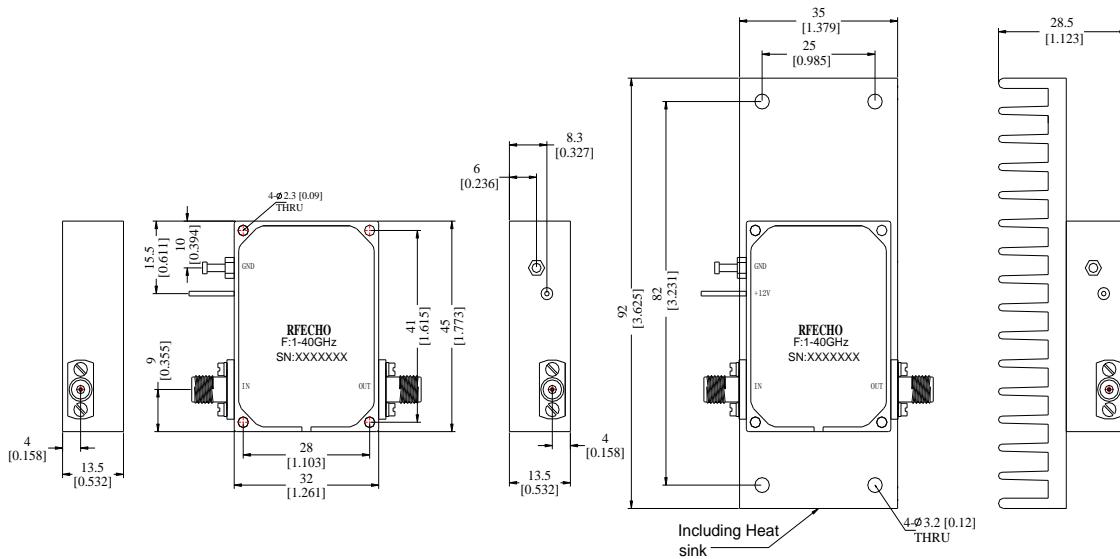


Gain @+25°C

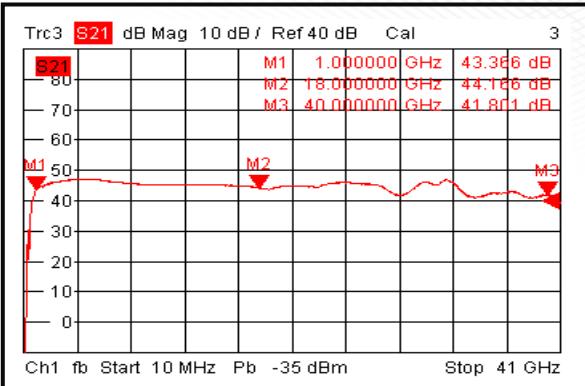


Input VSWR @+25°C

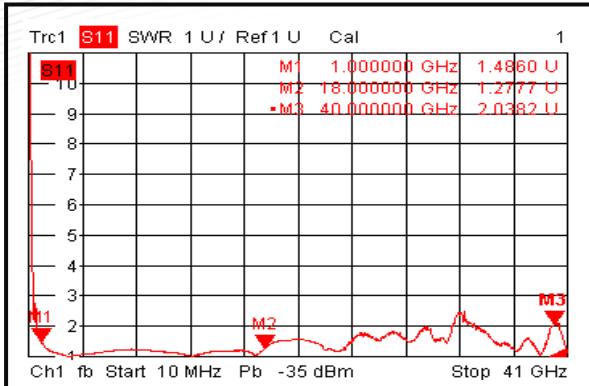


Output VSWR @+25°C

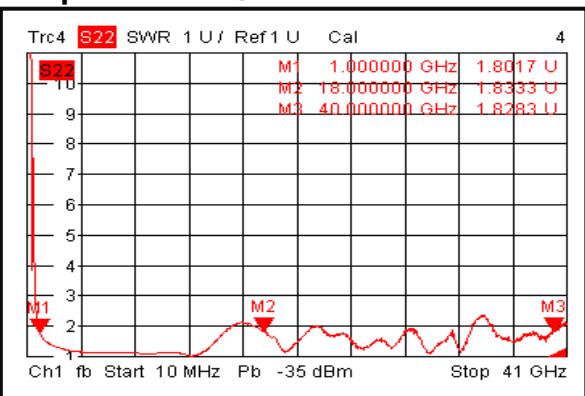


Isolation @+25°C

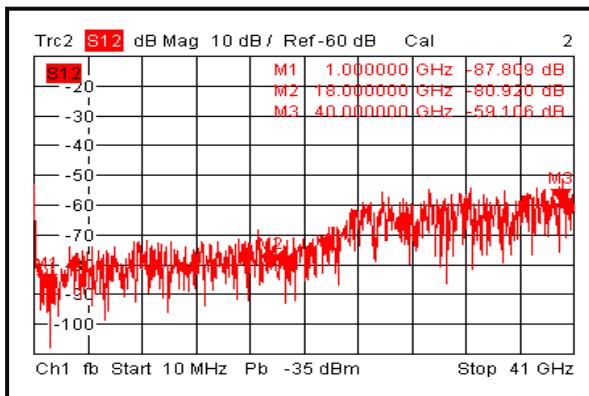


Gain @-40°C

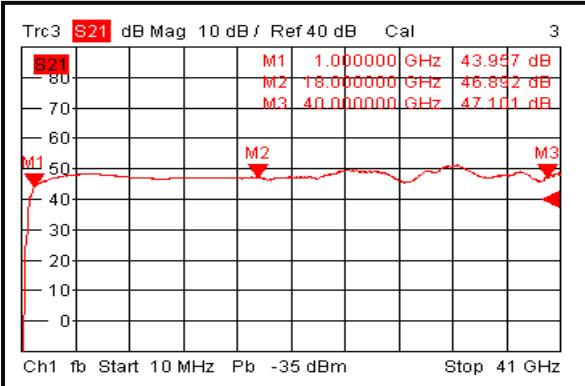


Input VSWR @-40°C

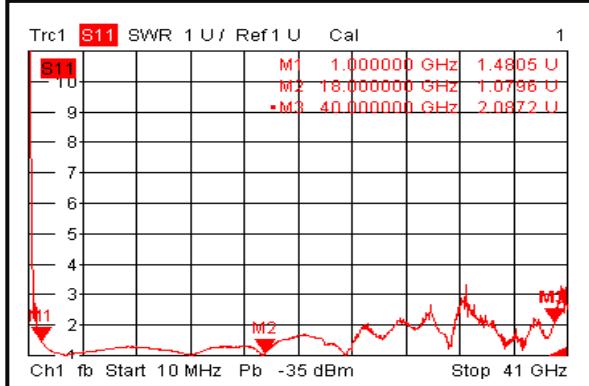


Output VSWR @-40°C

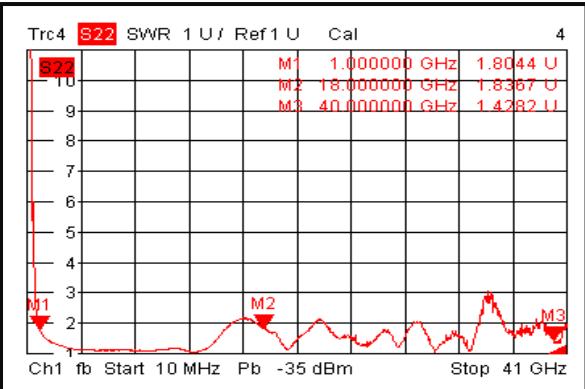


Isolation @-40°C

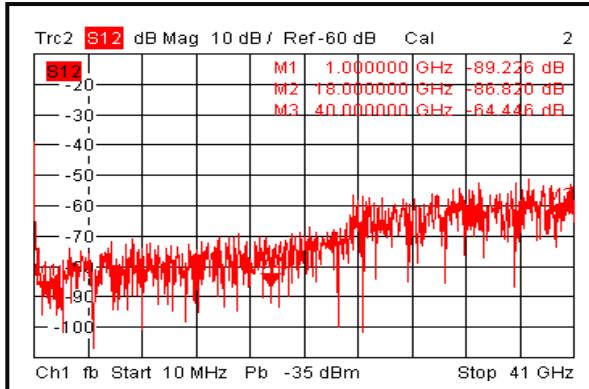


Gain @+85°C

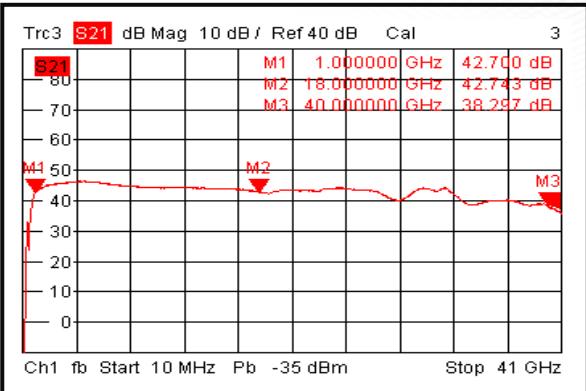


Input VSWR @+85°C

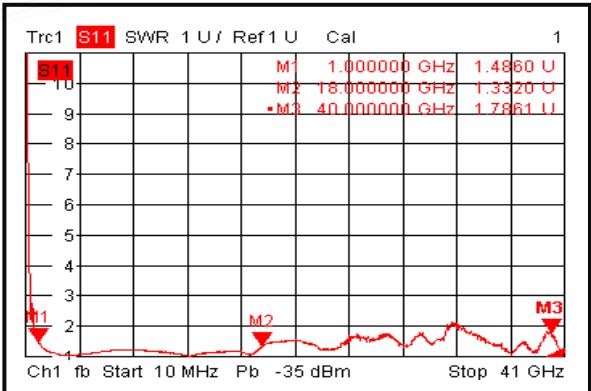


Output VSWR @+85°C

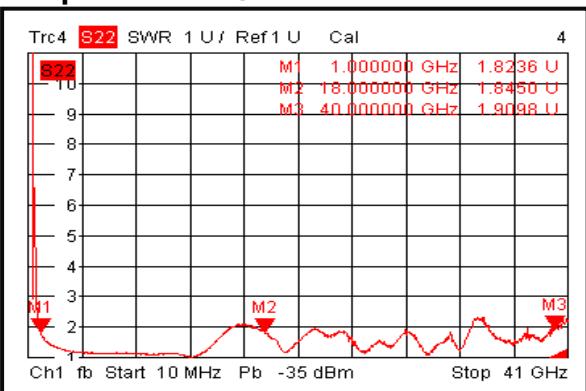


Isolation @+85°C

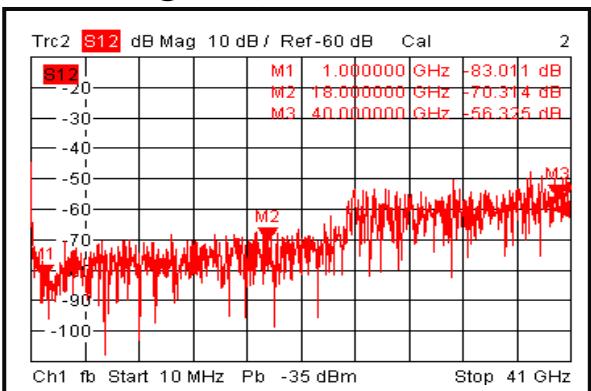


Gain vs. Output Power

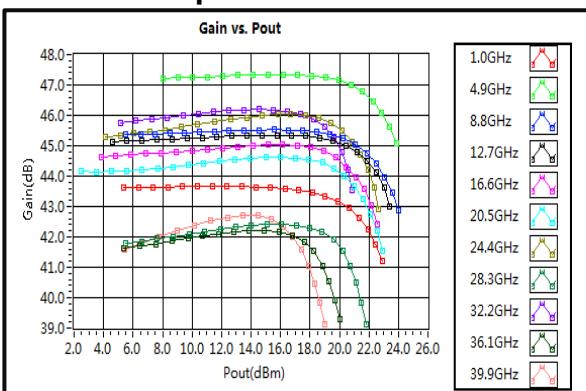


P1dB vs. Frequency

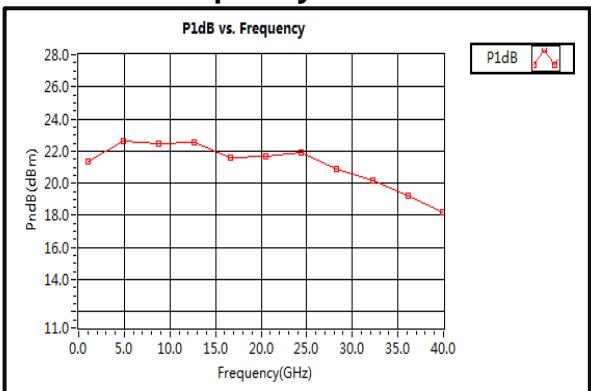


Output Third Order Intercept (OIP3)

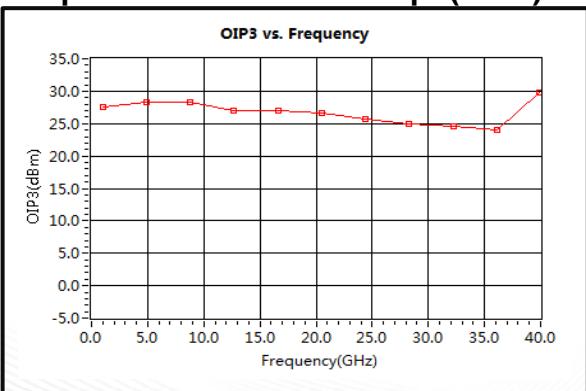

Saturation Power vs. Frequency

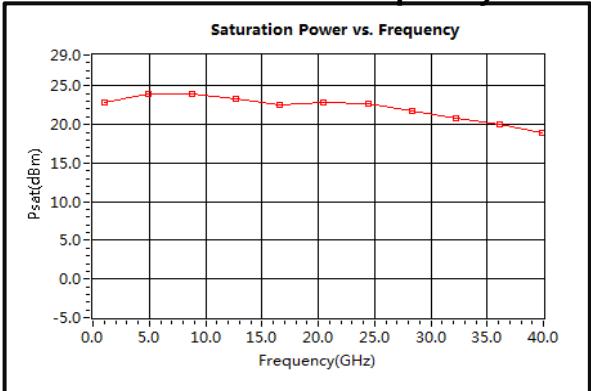


Noise Figure(1-4GHz)

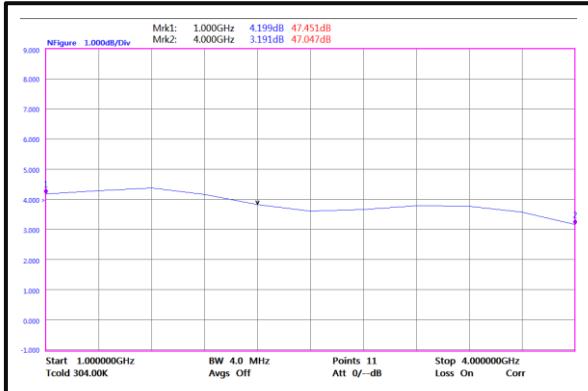


Noise Figure(4-26.5GHz)




Noise Figure(0.5-40GHz)

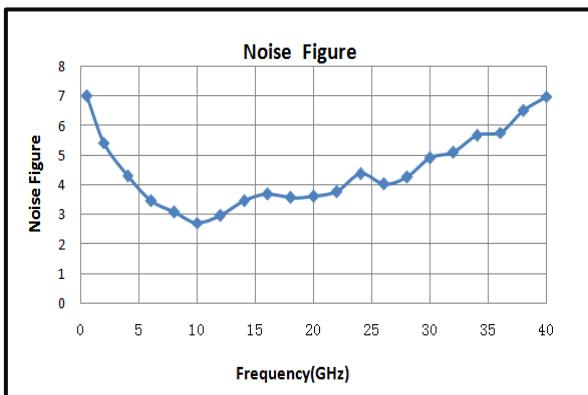

2nd Harmonic Wave Output Power

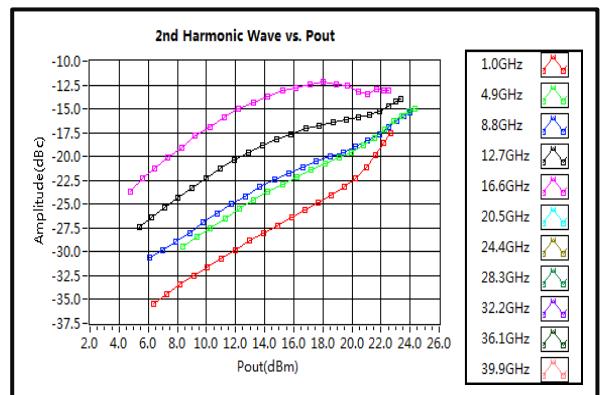

3rd Harmonic Wave Output Power

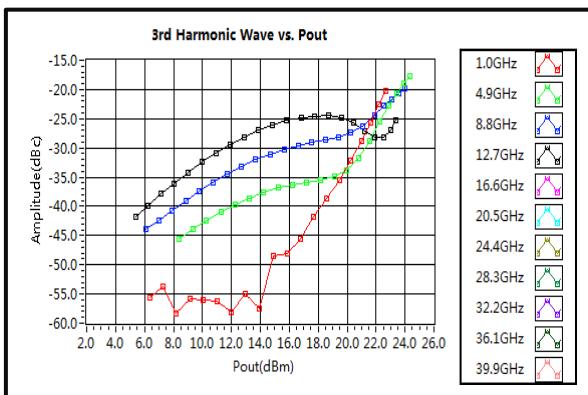

4th Harmonic Wave Output Power

