



# Low Noise Amplifier 156-164MHz



## Features

- Gain: 55dB Typical
- Noise Figure: 0.7 Typical
- P1dB Output Power: +22dBm Typical
- Supply Voltage: +12V
- 50 Ohm Matched Input / Output

## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameter	Min.	Typ.	Max.	Units
Frequency Range	156		164	MHz
Gain	50	55		dB
Gain Flatness		±0.8	±1.0	dB
Gain Variation Over Temperature(-40 ~ +85)			±1.5	dB
Noise Figure		0.7	1.0	dB
Input VSWR		1.3	1.8	:1
Output VSWR		1.5	1.8	:1
Output 1dB Compression Point (P1dB)	21	22.5		dBm
Saturated Output Power (Psat)		24		dBm
Output Third Order Intercept (OIP3)		34		dBm
Supply Current (Vd=+12V)		230	260	mA
Isolation S12		-50		dB

Weight	2.74 ounces	Impedance	50ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



### Absolute Maximum Ratings

Operating Voltage	+11~15V
RF Input Power	-5dBm

### Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

### Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


### Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

### Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

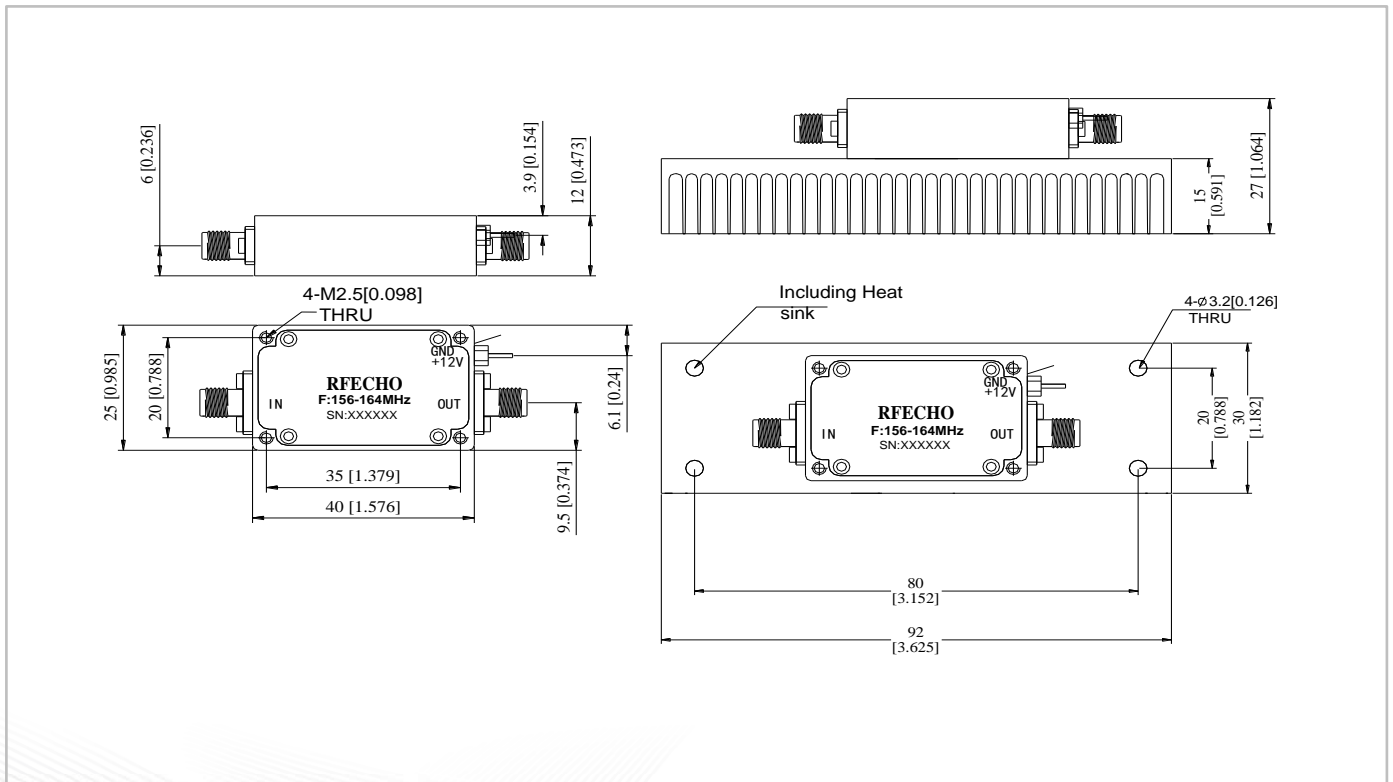





### Gain @+25°C

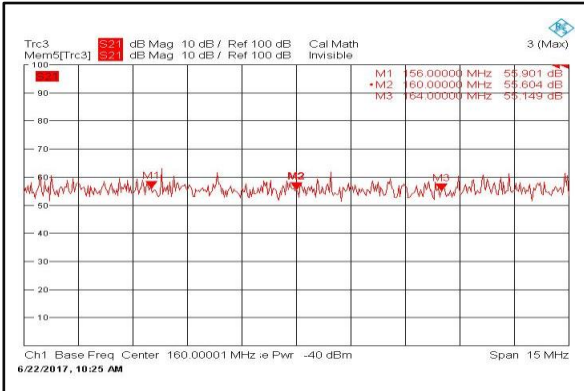


### Input VSWR @+25°C

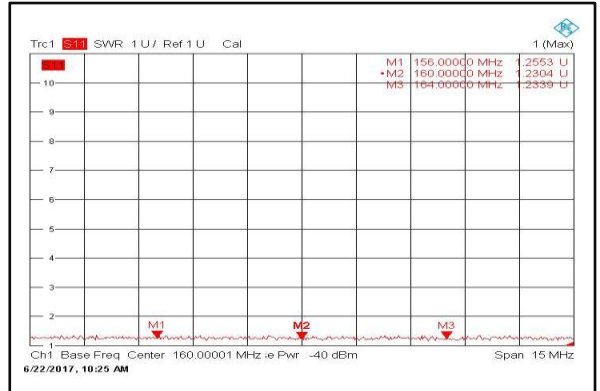


### Output VSWR @+25°C

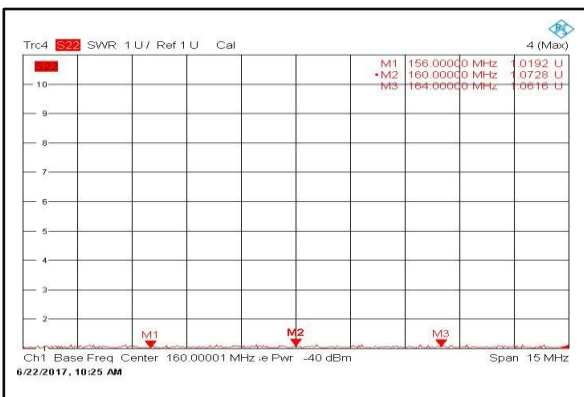


### Isolation @+25°C

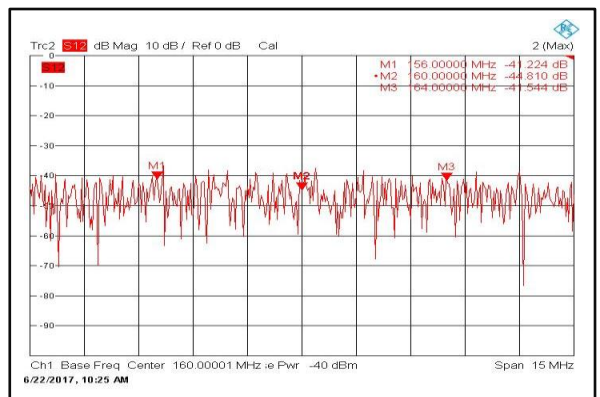

### Gain @-40°C

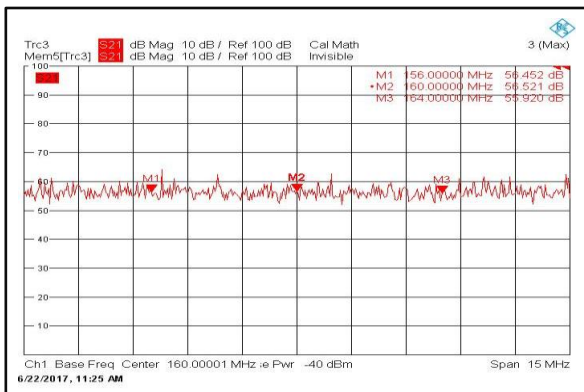


### Input VSWR @-40°C

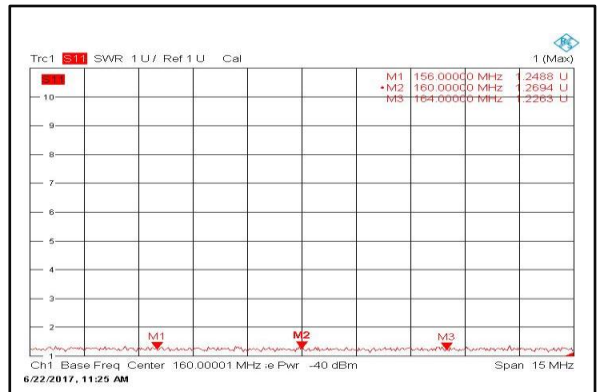





### Output VSWR @-40°C

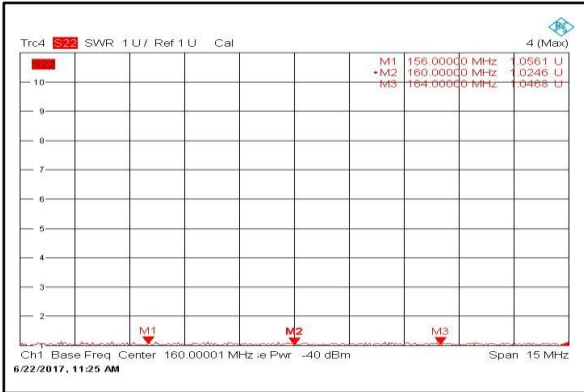


### Isolation @-40°C

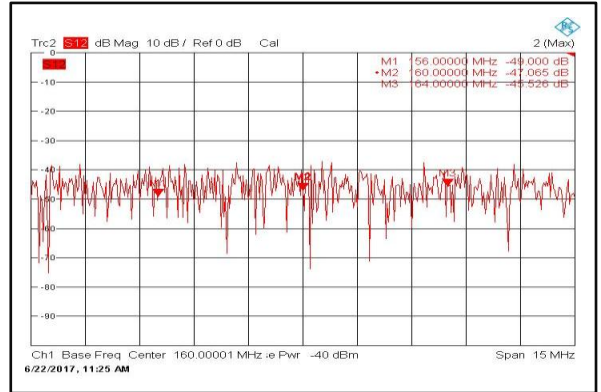


### Gain @+85°C

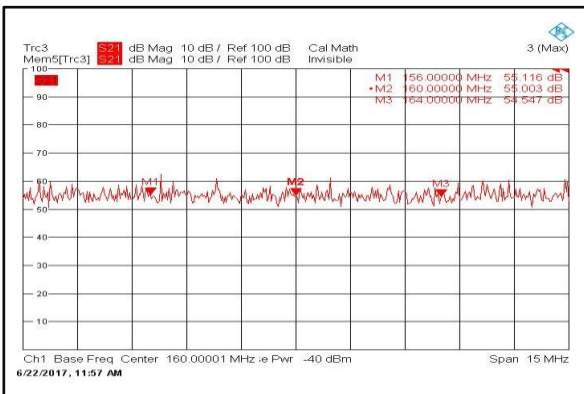


### Input VSWR @+85°C

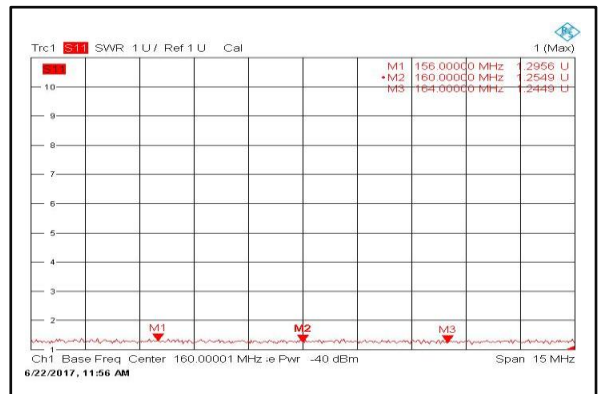

### Output VSWR @+85°C

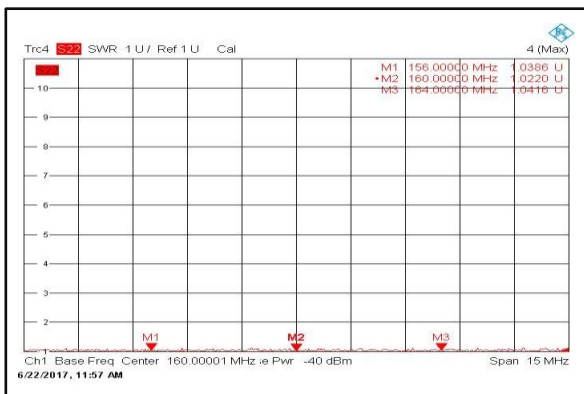


### Isolation @+85°C

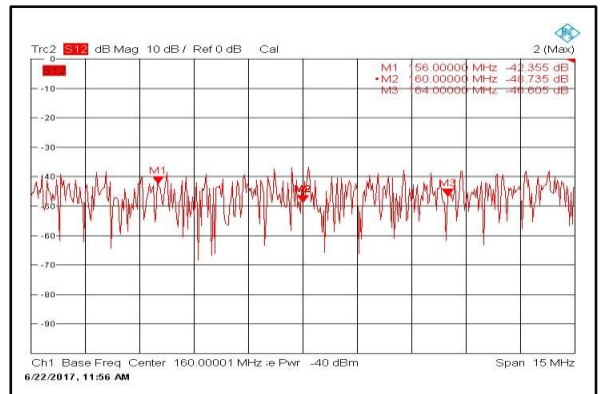







### Gain vs. Output Power

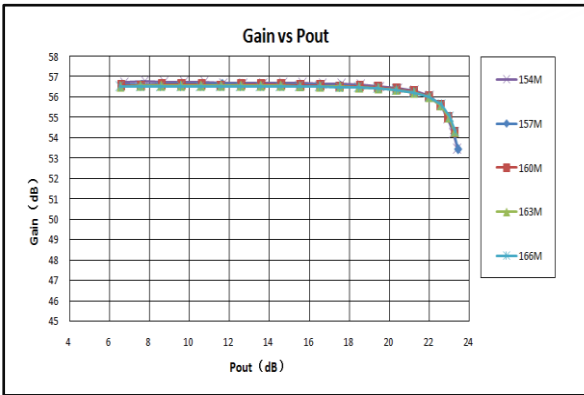

### P1dB vs. Frequency

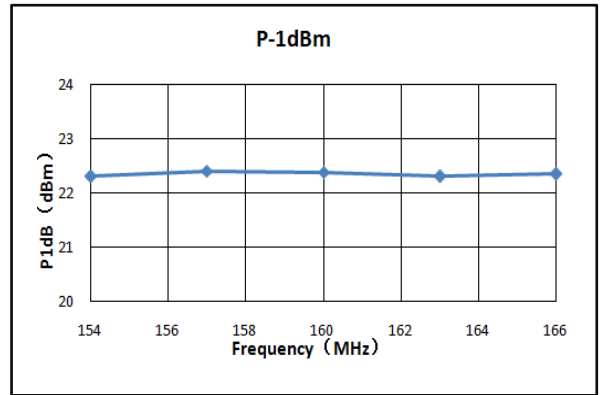

### Output Third Order Intercept (OIP3)

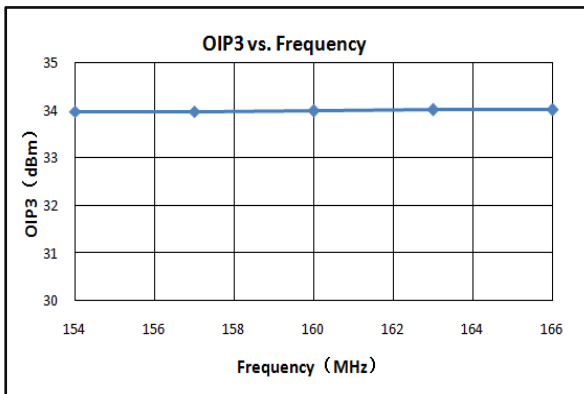

### Noise Figure

