

5W Front End Over Drive Protected LNA

0.02~3.5GHz

Features

- Gain: 32dB Typical
- Noise Figure: 1.3dB Typical
- P1dB Output Power: +18dBm Typical
- Supply Voltage: +12V @ 120mA



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.02		3.5	GHz
Gain	28	32		dB
Gain Flatness		±2.0		dB
Gain Variation Over Temperature(-40 ~ +85)		±1.5		dB
Noise Figure		1.3	2.0	dB
Input VSWR		1.8	2.5	: 1
Output VSWR		1.8	2.5	: 1
Output 1dB Compression Point (P1dB)	18	22		dBm
Saturated Output Power (Psat)		23		dBm
Output Third Order Intercept (OIP3)		28		dBm
Isolation S12		-50		dB
Supply Current (Vcc=+12V)		120		mA

Weight	1.41 ounce	Impedance	50ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)

Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power (RFIN)	+37dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground



Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


Outline Drawing:

All Dimensions in mm (inches)


Heat Sink required during operation(Sold Separately)

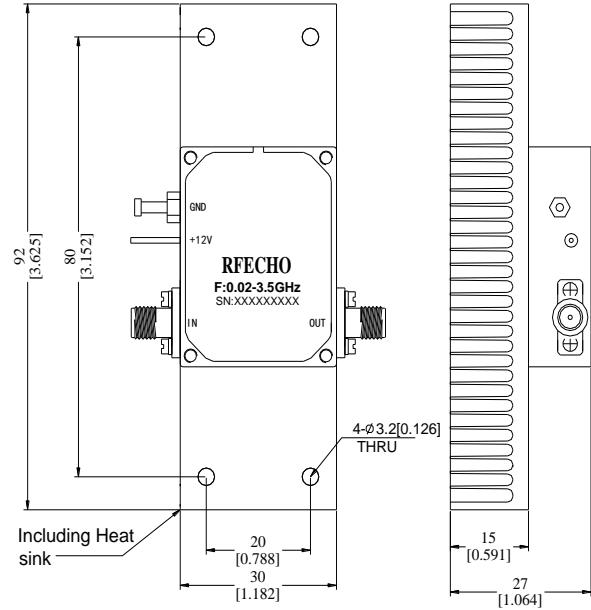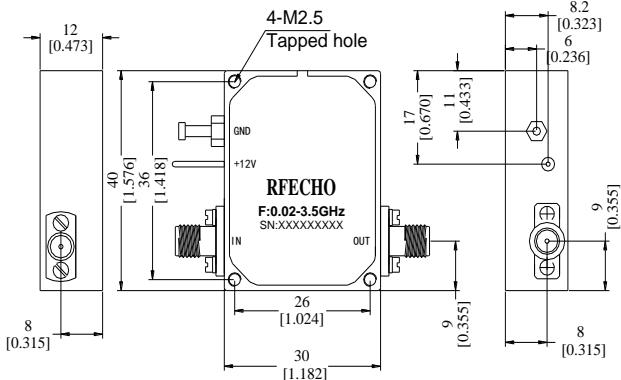


Gain @+25°C

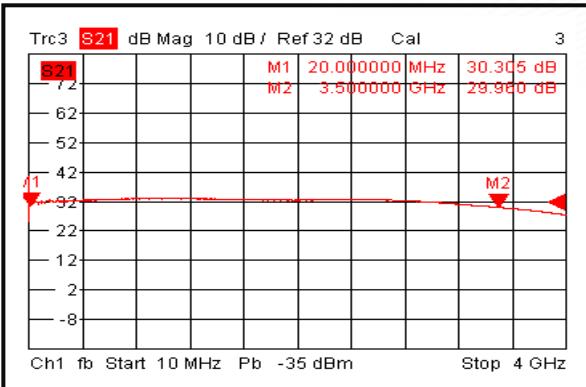


Input VSWR @+25°C

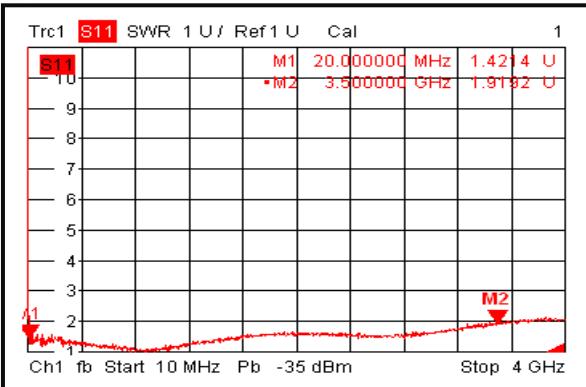


Output VSWR @+25°C

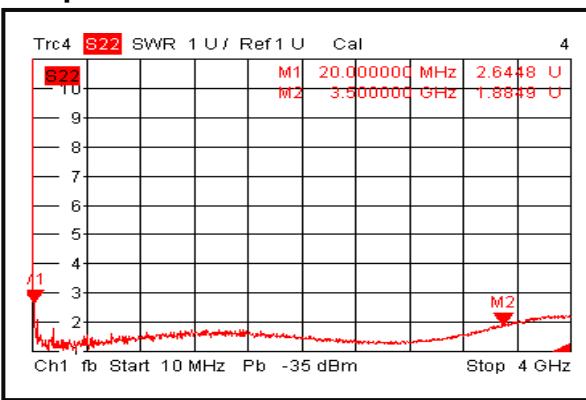


Isolation @+25°C

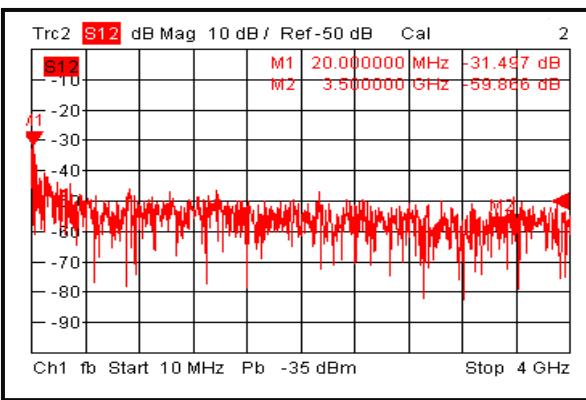


Gain @-40°C

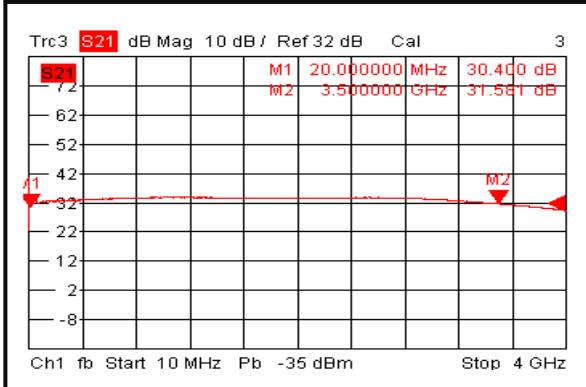


Input VSWR @-40°C

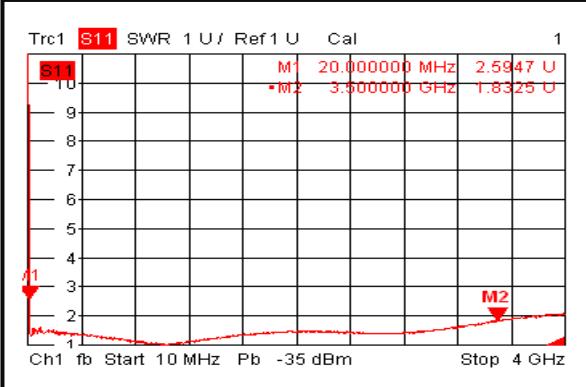


Output VSWR @-40°C

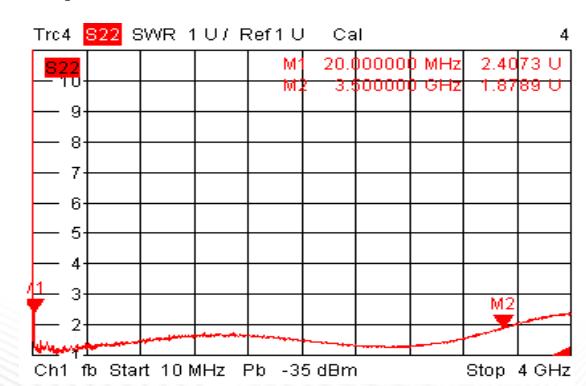


Isolation @-40°C

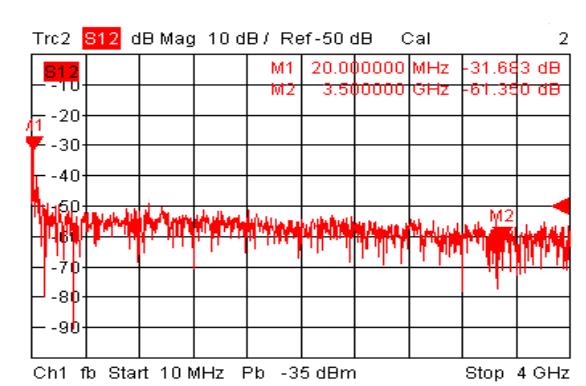


Gain @+85°C

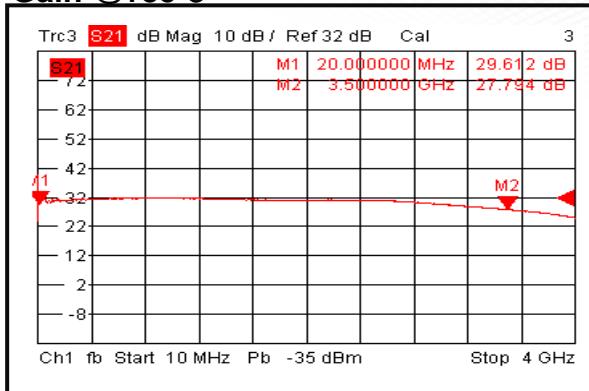


Input VSWR @+85°C

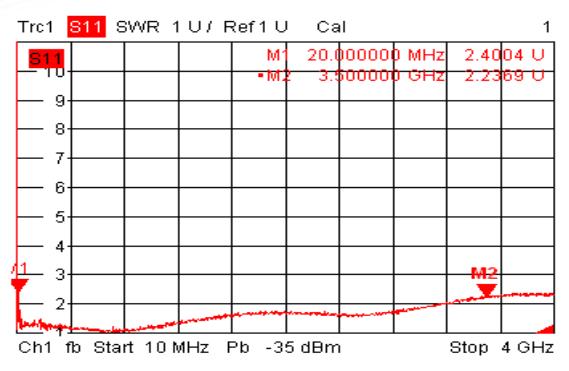


Output VSWR @+85°C

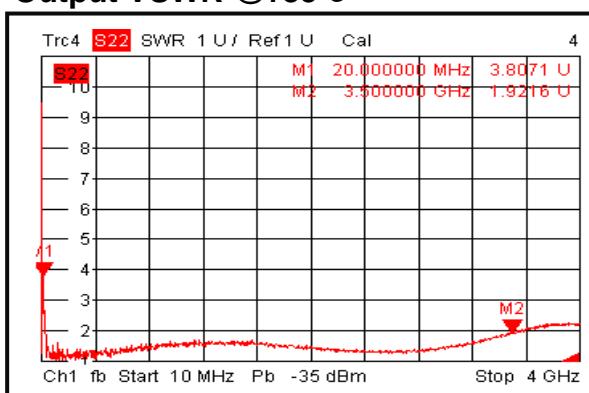


Isolation @+85°C

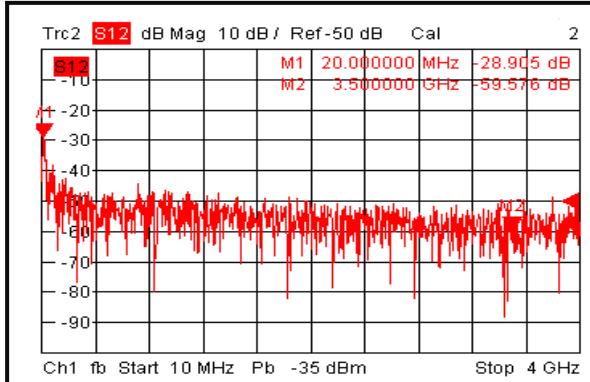


Gain vs. Output Power

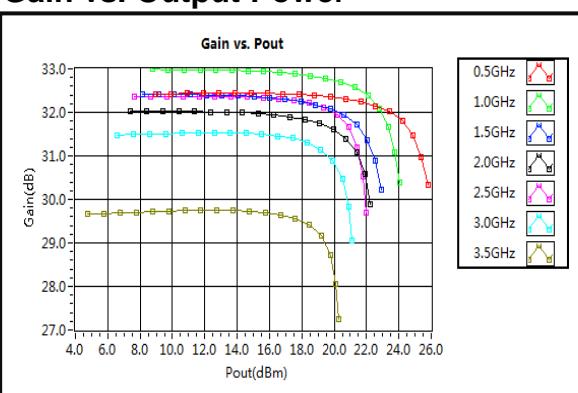


P1dB vs. Frequency

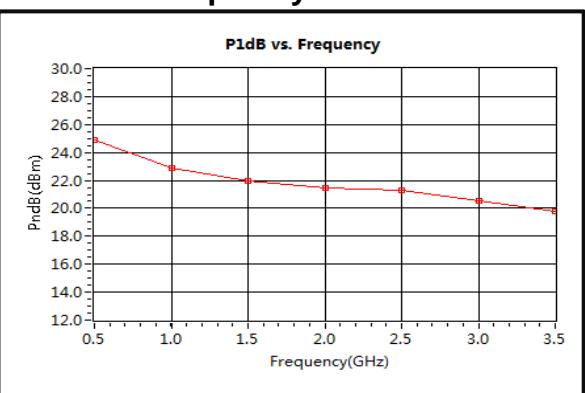


Output Third Order Intercept (OIP3)

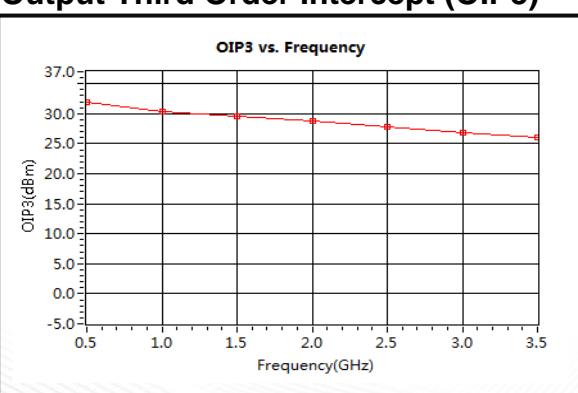


Saturation Power vs. Frequency

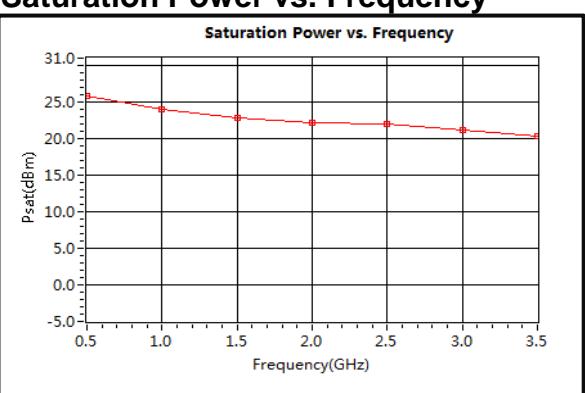


Noise Figure

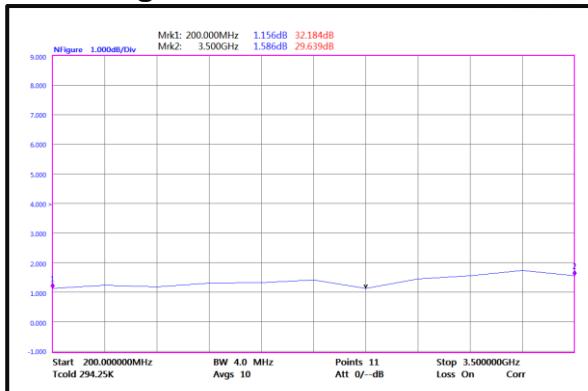

2nd Harmonic Wave Output Power

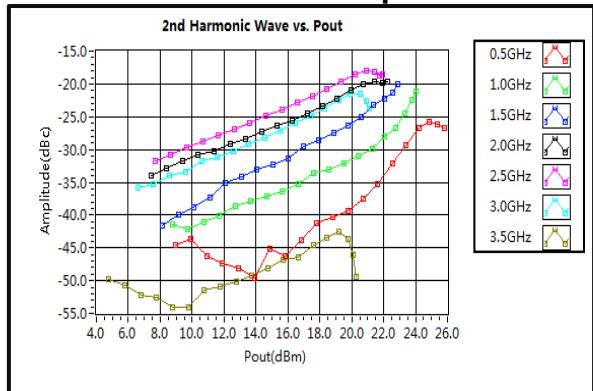

3rd Harmonic Wave Output Power

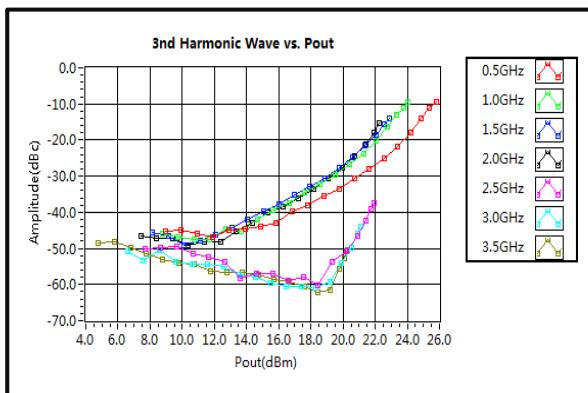

4th Harmonic Wave Output Power

