

Wide Band AC–Low Noise Amplifier 6GHz~18GHz

Features

- High Output Power 16dBm typical.
- High peak to average handling capability.
- High linearity and low noise figure.
- Convenient AC Power Input. (AC 110V ~ 220V)
- Integrated Heat Sink and Fan.



Typical Applications

- Microwave Radio and VSAT.
- Telecom Infrastructure.

Parameter	Min.	Typ.	Max.	Units
Frequency Range	6		18	GHz
Gain	45	50		dB
Gain Flatness		±2.5		dB
Gain Variation Over Temperature(-40°C~+85°C)		±2.0		dB
Noise Figure		1.5	2.0	dB
Input VSWR		1.8		: 1
Output VSWR		1.6	2.0	: 1
Output 1dB Compression Point (P1dB)	12	14		dBm
Saturated Output Power (Psat)		16		dBm
Output Third Order Intercept (OIP3)		20		dBm
Isolation S12		-50		dB
Supply Current (Idd) (AC=220V)	60 Max.			mA

Weight	38 ounces(Max.)	Impedance	50ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gray Painted		

Absolute Maximum Ratings

Operating Voltage	AC110~230V
RF Input Power (RFIN)	-30dBm

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment) 60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Biassing Up Procedure


Step 1	Connect input and output with 50 Ohm source and load with in band return loss better than 10dB.
Step 2	Connect AC Plug
Step 3	Flip switch to "ON" position

Power OFF Procedure


Step 1	Flip switch to "OFF" position
Step 2	Remove AC Plug
Step 3	Remove RF Connection

Outline Drawing:


All Dimensions in mm (inches) Tolerances ±1.5 (0.06)

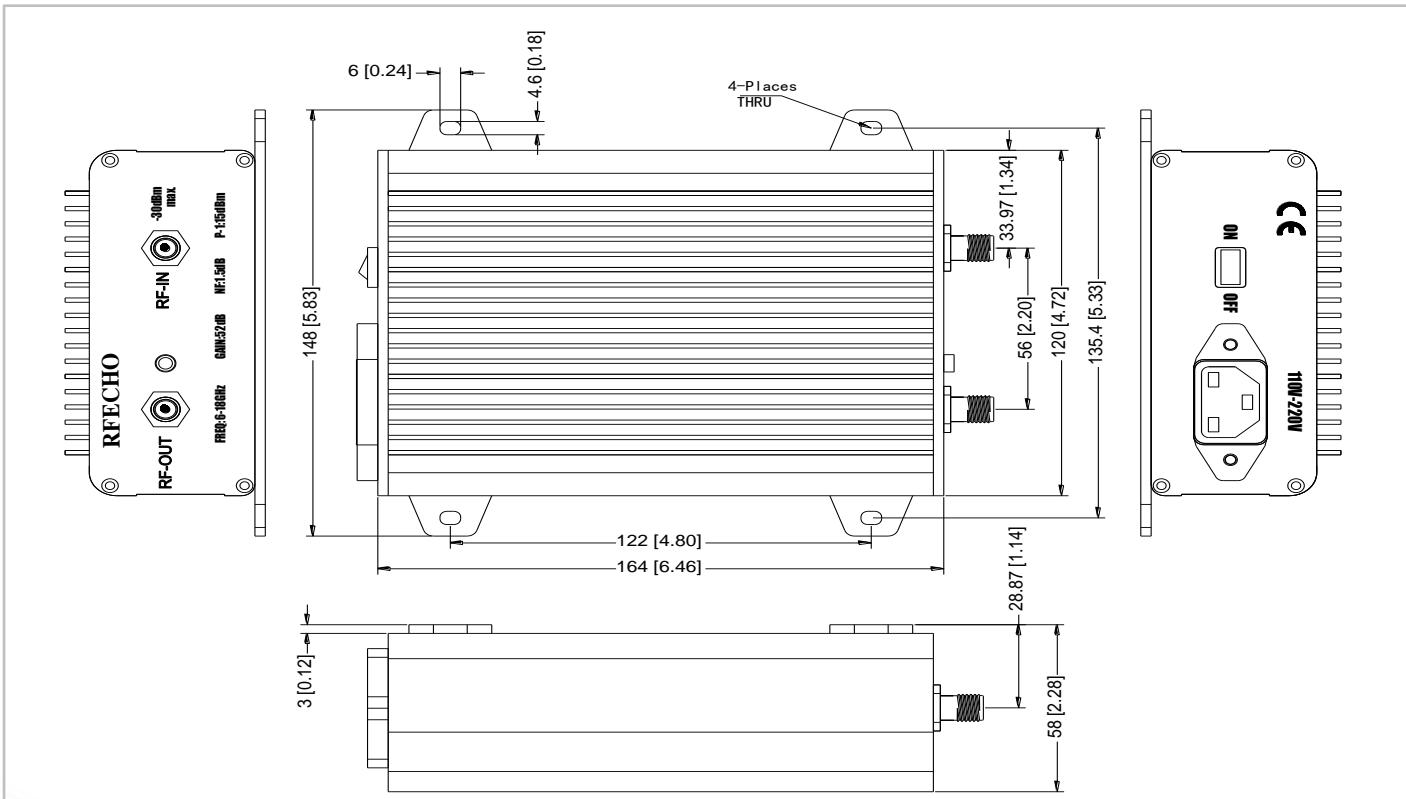


Gain@+25°C

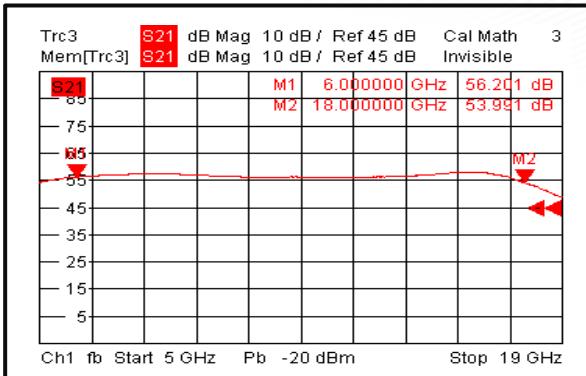


Input VSWR@+25°C

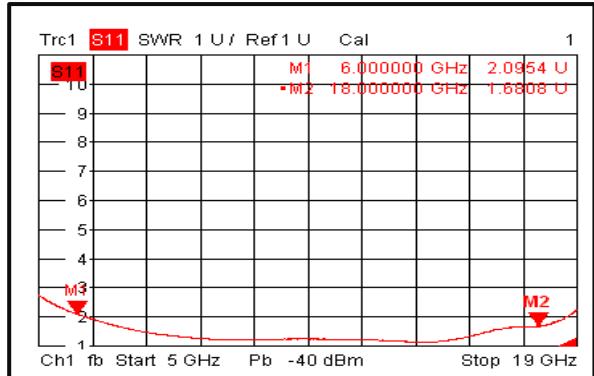


Output VSWR@+25°C

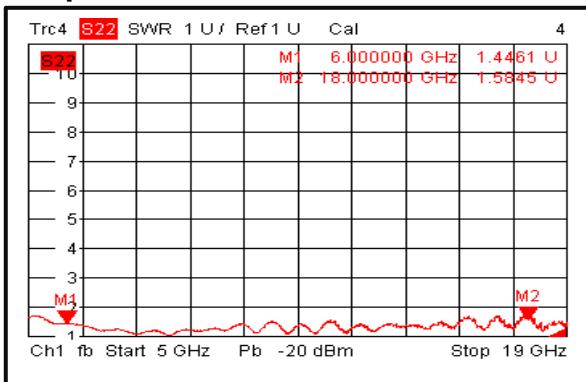


Isolation@+25°C

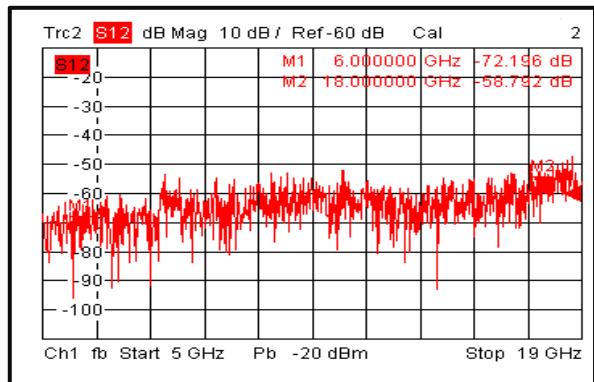


Gain@-40°C

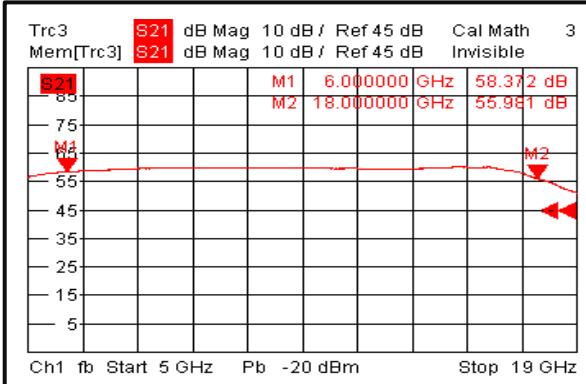


Input VSWR@-40°C

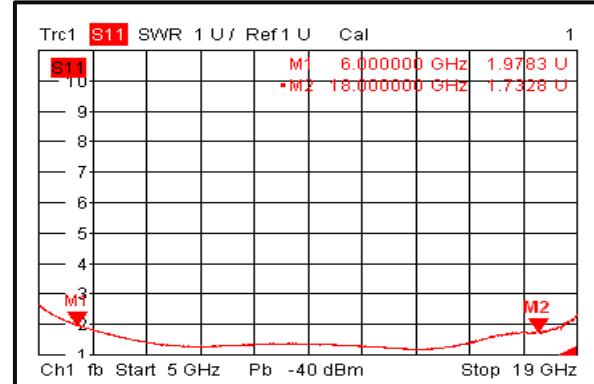


Output VSWR@-40°C

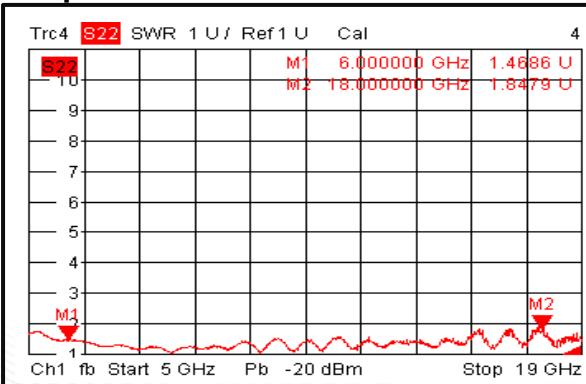


Isolation@-40°C

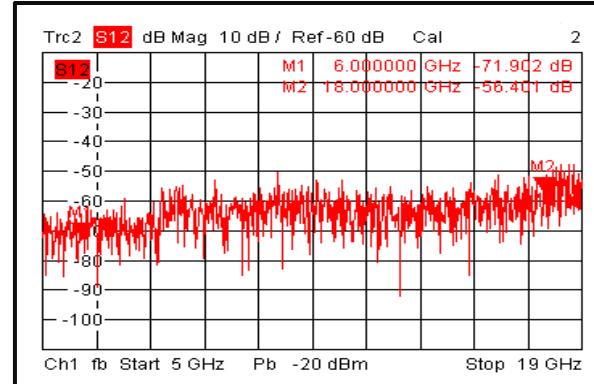


Gain@+85°C

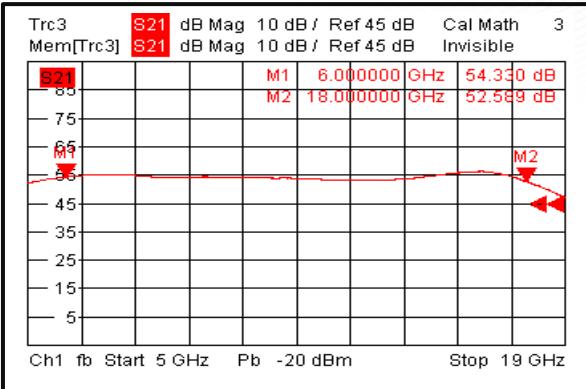


Input VSWR@+85°C

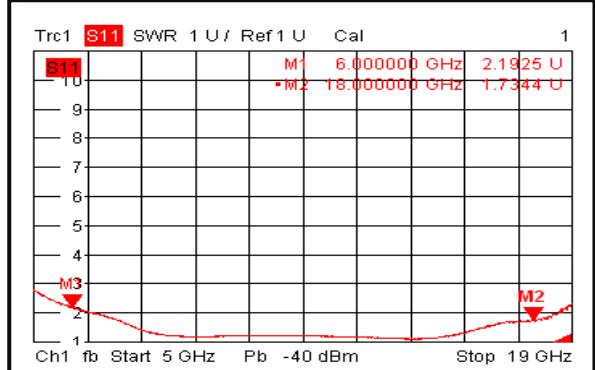


Output VSWR@+85°C

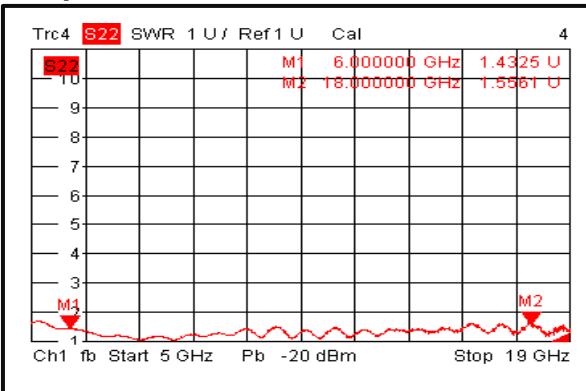


Isolation@+85°C

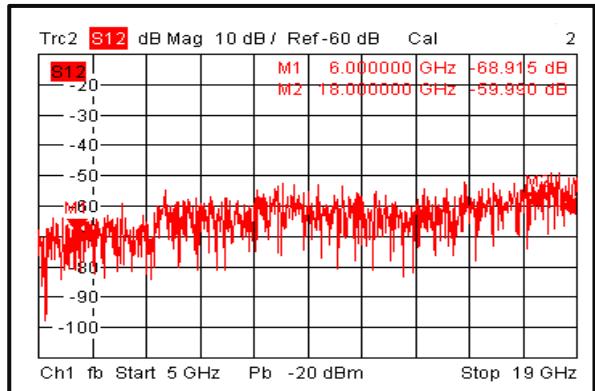


Gain vs. Output Power

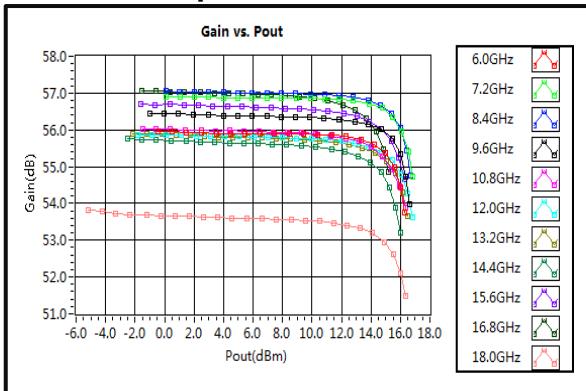


P1dB vs. Frequency

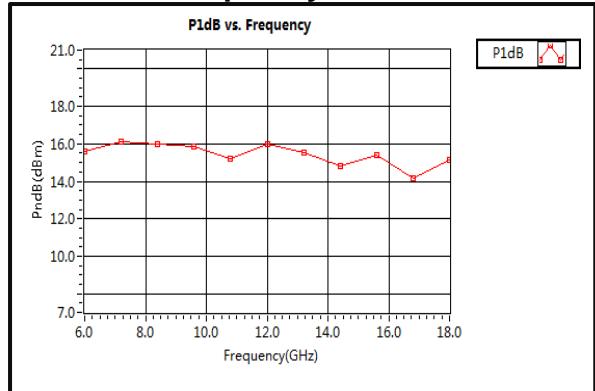


Output Third Order Intercept (OIP3)

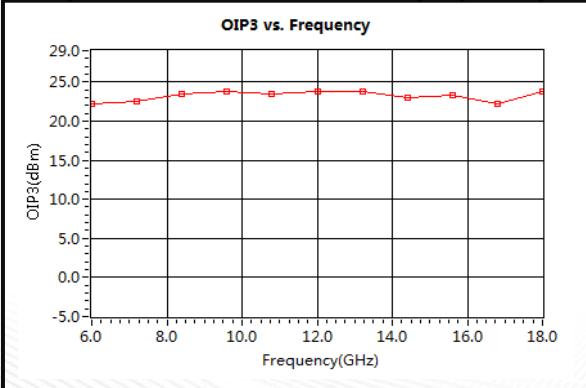


Saturation Power vs. Frequency

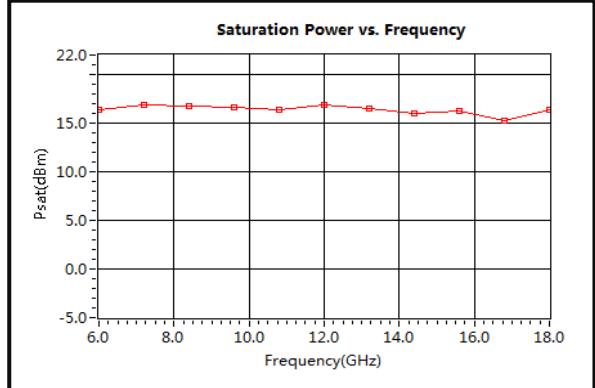


Noise Figure

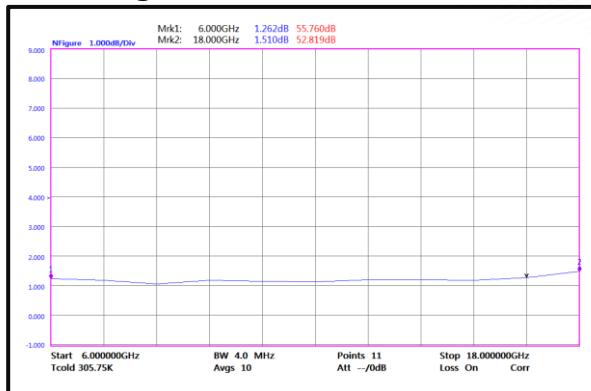

2nd Harmonic Wave Output Power

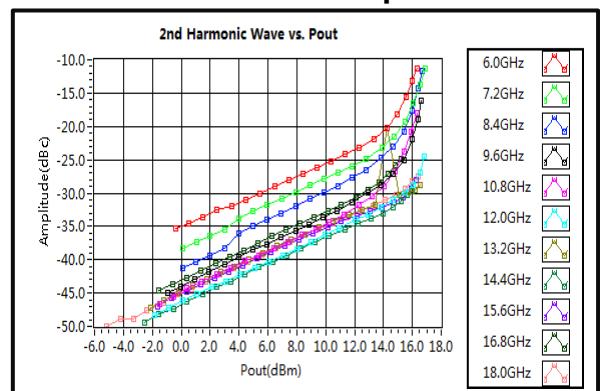

3rd Harmonic Wave Output Power

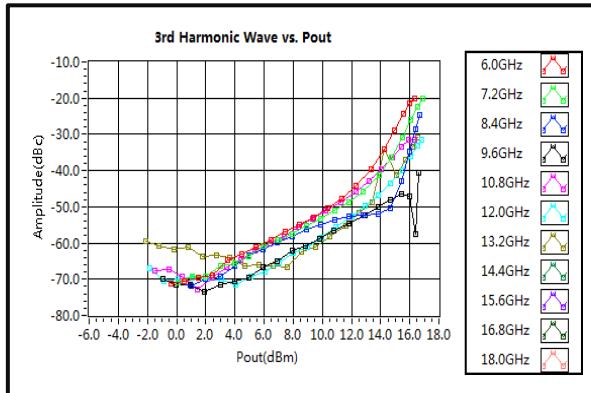

4th Harmonic Wave Output Power

