

Cavity Band Pass Filter

OBP-1880-60

Ocean Microwave band-pass filter (Ocean band-pass filter ,abbreviation : abbreviation : OBP) is a filter that allows waves of specific frequency band to pass through while rejecting other frequency bands.


The product name of this Ocean band-pass filter (OBP) is OBP-1880-60, its Center Frequency(F0) is 1880MHz, its Pass Band Bandwidth is 1850 ~ 1910MHz, its Pass Band Insertion Loss is $\leq 1.5\text{dB}$, and its Pass Band VSWR is $\leq 1.3:1$.The Stop Band Rejection is $\geq 50\text{dB}$ @ $F_0 \pm 70\text{MHz}$.



Electrical Specifications

Center Frequency (F0)	1880MHz
Pass Band Frequency	1850 ~ 1910MHz
Pass Band Insertion Loss	$\leq 1.5\text{dB}$
Pass Band VSWR	$\leq 1.3:1$
Stop Band Rejection	$\geq 50\text{dB}$ @ $F_0 \pm 70\text{MHz}$ (DC ~ 1810MHz、1950 ~ 4000MHz)
Impedance	50 ohms
Surface Finish	Black Paint
Power Handling	20W
Connectors	N-Male / N-Female
Net Weight	0.29 KG
Configuration	As Below (Size Unit: mm)

PRODUCT DIMENSIONS

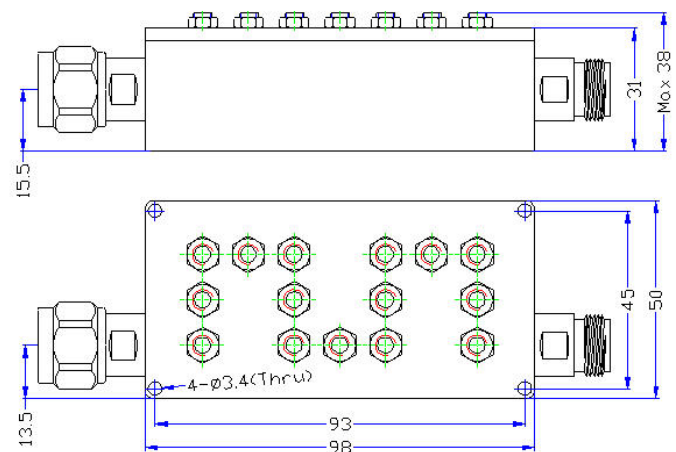

Test

