

Cavity Band Pass Filter OBP-1950-60

Ocean Microwave band-pass filter (Ocean band-pass filter ,abbreviation : abbreviation : OBP) is a filter that allows waves of specific frequency band to pass through while rejecting other frequency bands.


The product name of this Ocean band-pass filter (OBP) is OBP-1950-60, its Center Frequency(F0) is 1950MHz, its Pass Band Bandwidth is 1920 ~ 1980MHz, its Pass Band Insertion Loss is \leq 1.5dB, and its Pass Band VSWR is \leq 1.3:1.The Stop Band Rejection is \geq 50dB @F0 \pm 70MHz.



Electrical Specifications

Center Frequency (F0)	1950MHz
Pass Band Frequency	1920 ~ 1980MHz
Pass Band Insertion Loss	≤1.5dB
Pass Band VSWR	≤1.3:1
Stop Band Rejection	≥50dB @ F0±70MHz (DC ~ 1880MHz、2020 ~ 4000MHz)
Impedance	50 ohms
Surface Finish	Black Paint
Power Handling	20W
Connectors	N-Male / N-Female
Net Weight	0.29 KG
Configuration	As Below (Size Unit: mm)

PRODUCT DIMENSIONS

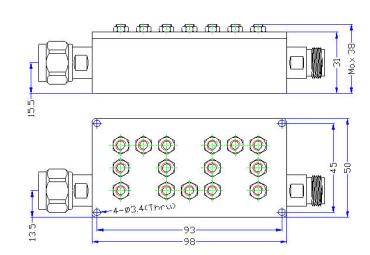

Test

