




Absorptive 2-18GHz Coaxial SP8T Switch

Features

- Wide Band Operation 2-18GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request

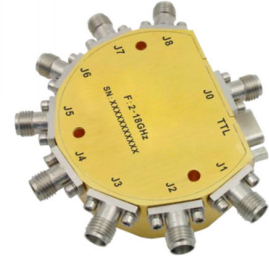

Typical Applications

- Wireless Infrastructure
 - Military & Aerospace
 - Fiber Optics
- RF Microwave & VSAT
Test Instrument

Parameter	Min	Typ.	Max	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	2-6		6-12		12-18					GHz
Insertion Loss		2.0	2.5		2.8	3.5		3.5	4.0	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ ° C
Isolation	60	75		79	85		70	80		dB
Input VSWR		1.5	1.8		1.5	1.8		1.5	1.8	: 1
Output VSWR		1.5	1.8		1.5	1.8		1.5	1.8	: 1
RF Input power (CW)			30			30			30	dBm
DC Power Dissipation		1.5			1.5			1.5		W
0.1dB Compression Point(P0.1dB)		30			30			30		dBm
IIP3		55			55			55		dBm
Switching Speed			100			100			100	ns
Weight	2.12									ounces
Impedance	50									Ω
Bias Current (+5V / -5V)	350/50									mA
Input / Output Connectors	SMA-Female									
Interface and Control Connector	MICRO-D9 (Female)									
Finish	Gold Plated									
Material	Aluminum									
Sealing	Hermetically Sealed (Optional)									



Absolute Maximum Ratings

Biasing	+5V ± 10%/-5V ± 10%
TTL Control Voltage	0~0.8V/2.8~5V

Ordering Information

Part No.	ECCN	Description
DBSA0802001800B	EAR99	SP8T 2-18GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-45°C~+85°C
Storage Temperature	-55°C~+125°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Uncontrolled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40c
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Control Input TTL			Signal Path State
C3	C2	C1	
0	0	0	J0-J1
0	0	1	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4
1	0	0	J0-J5
1	0	1	J0-J6
1	1	0	J0-J7
1	1	1	J0-J8


Control Pin Customization available upon request




Insertion Loss @+25°C

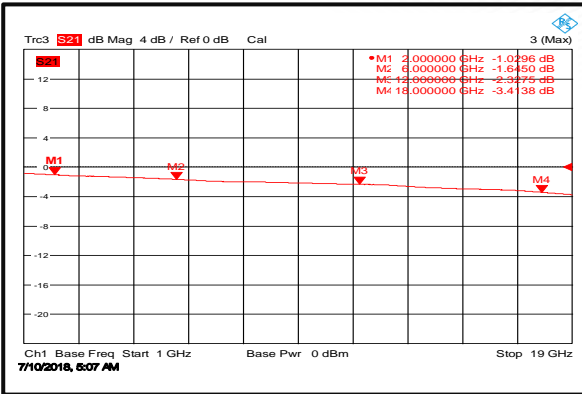


Input VSWR @+25°C

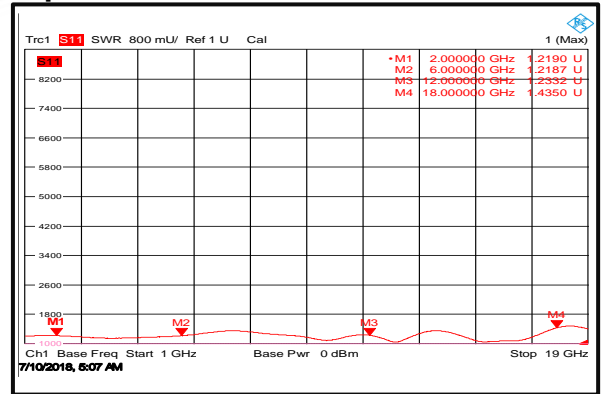


Output VSWR @+25°C

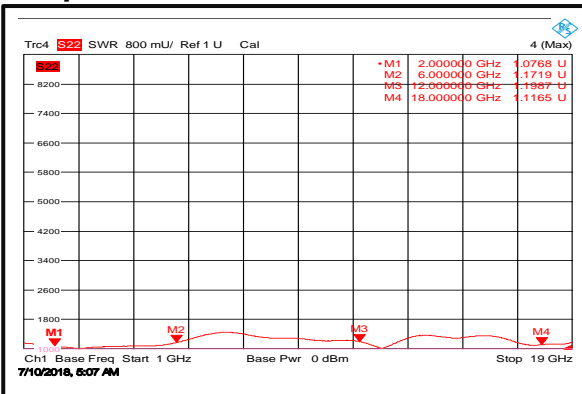


Isolation @+25°C

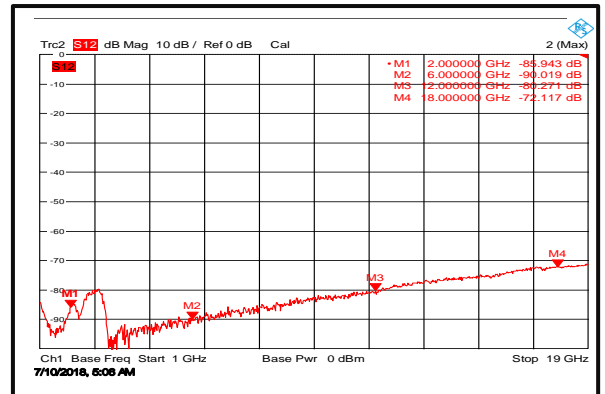


Insertion Loss @-45°C

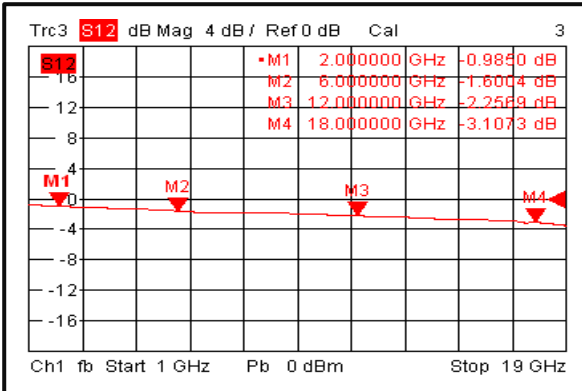


Input VSWR @-45°C

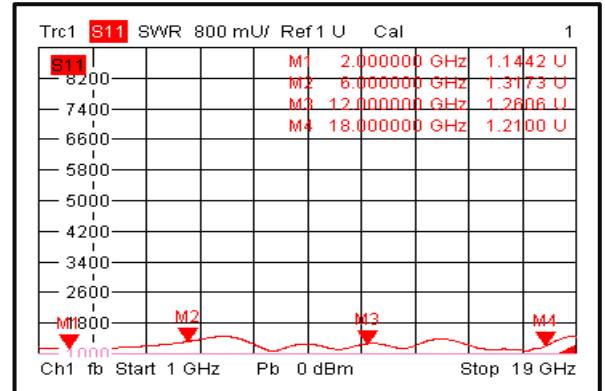

Output VSWR @-45°C

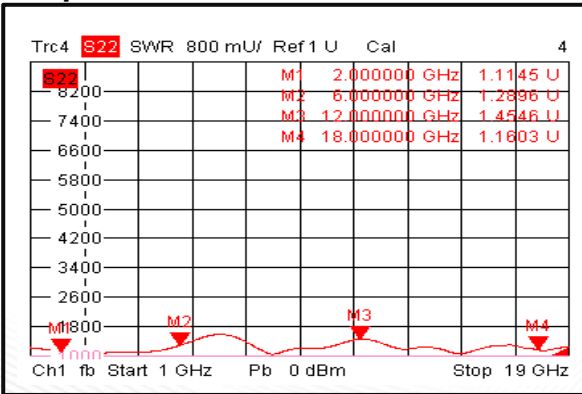


Isolation @-45°C

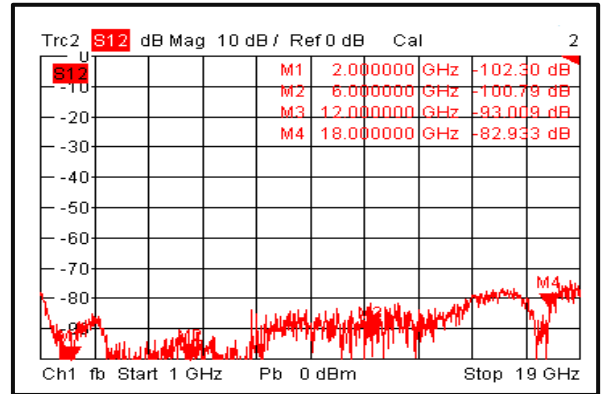





Insertion Loss @+85°C

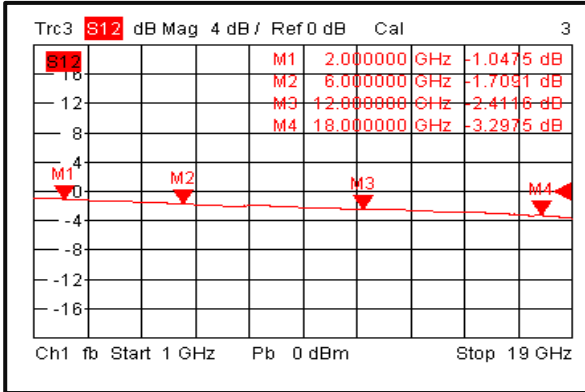


Input VSWR @+85°C

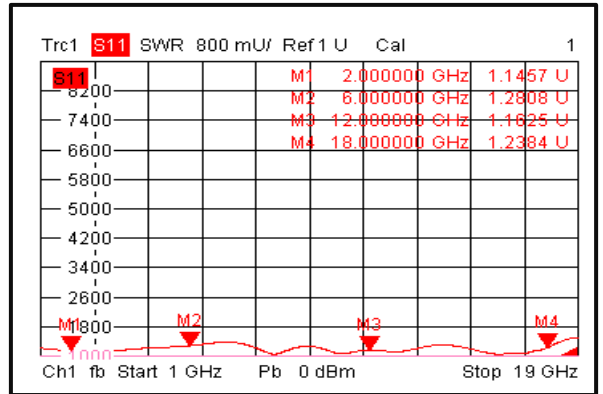


Output VSWR @+85°C

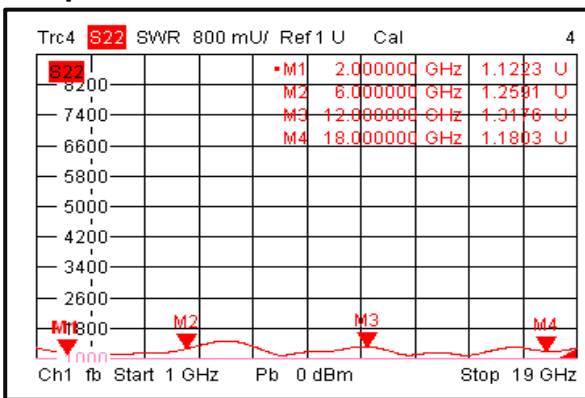

Isolation @+85°C

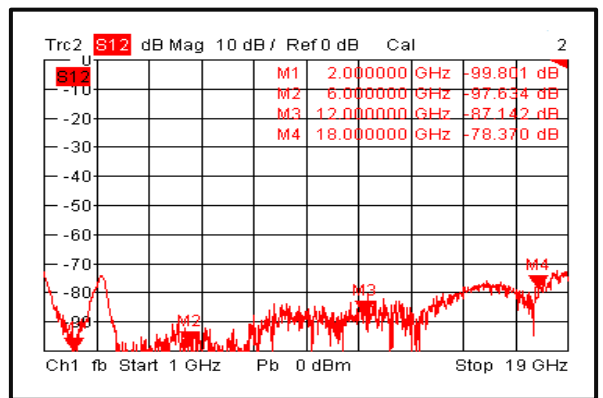

Switching Speed

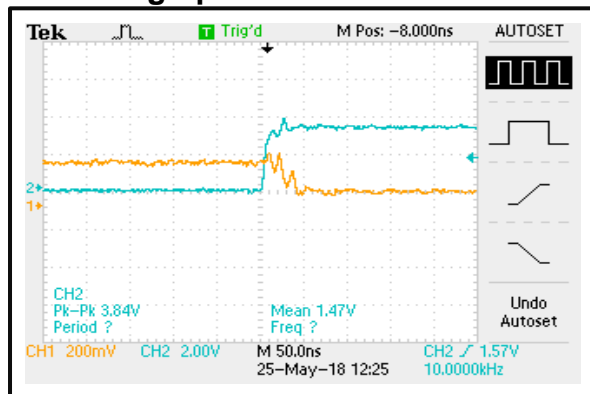

Switching Speed

