




Wide Band Low Noise Amplifier 8GHz~16GHz

Features

- Gain: 40dB Typical
- Noise Figure: 1.7dB Typical
- Output P1dB: +16dBm Typical
- Supply Voltage: +12V



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Units
Frequency Range	8		12	GHz
Gain	32	35		dB
Gain Flatness		±1.0		dB
Gain Variation Over Temperature (-40°C~+85°C)		±0.8		dB
Noise Figure		2.0		dB
Input VSWR		1.8		: 1
Output VSWR		1.6		: 1
Output Power for 1 dB Compression (P1dB)	13	14		dBm
Saturated Output Power (Psat)		15		dBm
Output Third Order Intercept (OIP3)		25		dBm
Supply Current (Idd) (Vcc=+12V)		160	200	mA
Isolation S12		-60		dB
Input Max Power(no damage)			-11	dBm

Weight	0.71 ounces	Impedance	50ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power	-11dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure


Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

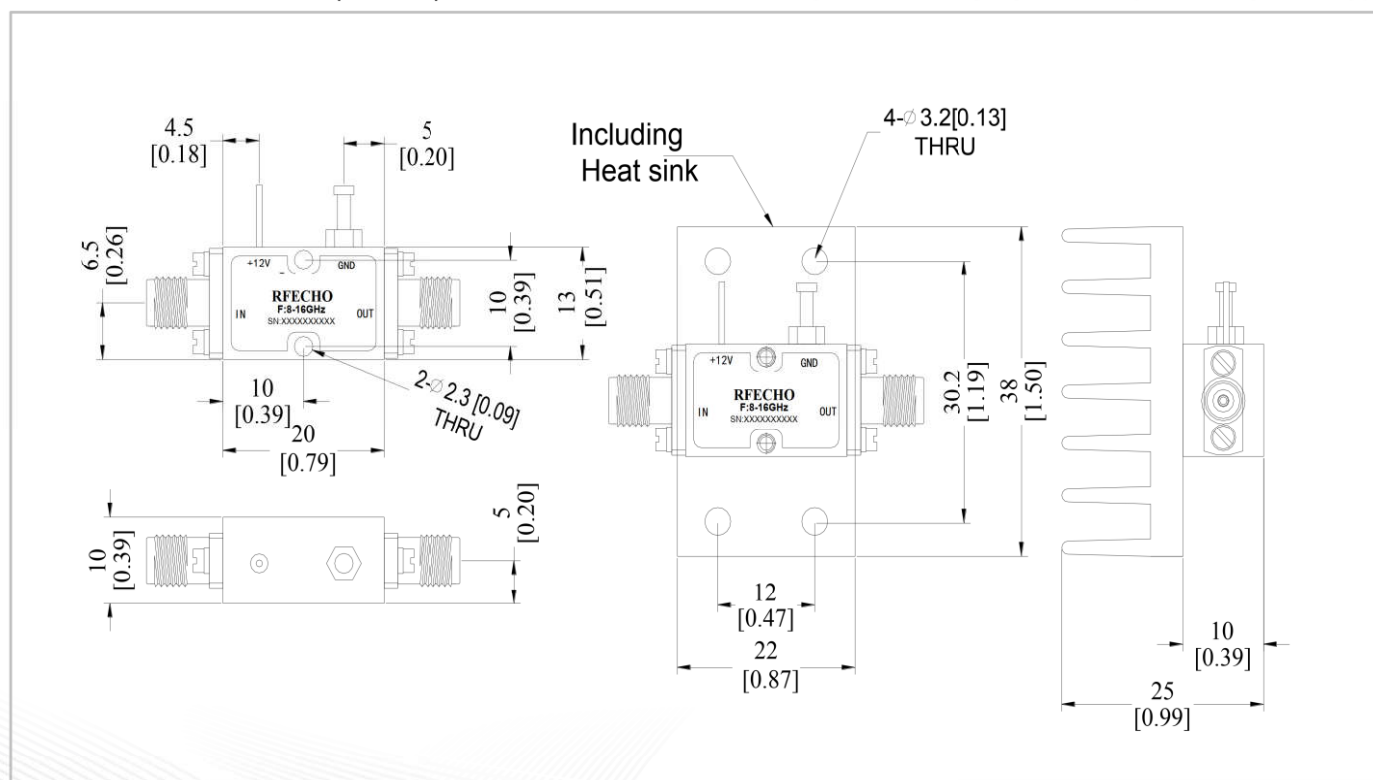





Gain @+25°C

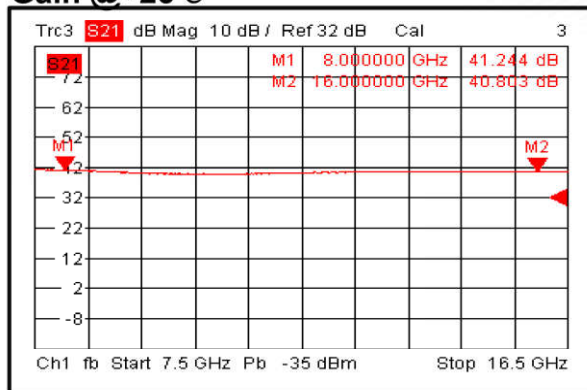


Input VSWR @+25°C

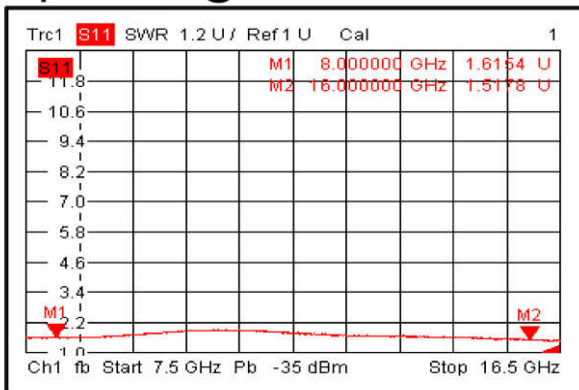


Output VSWR @+25°C

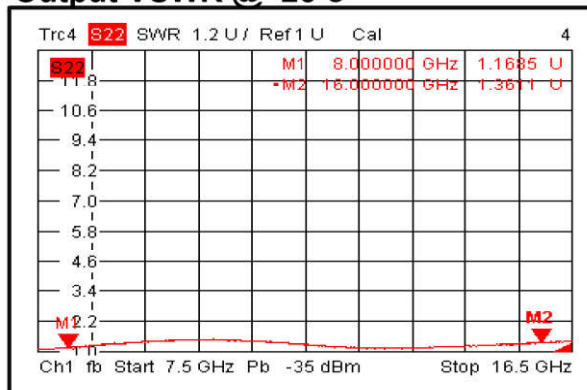


Isolation @+25°C

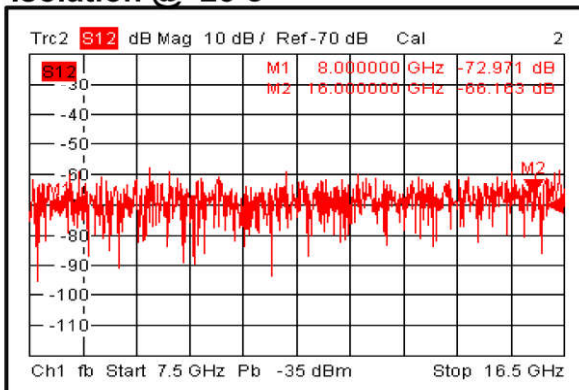


Gain @-40°C

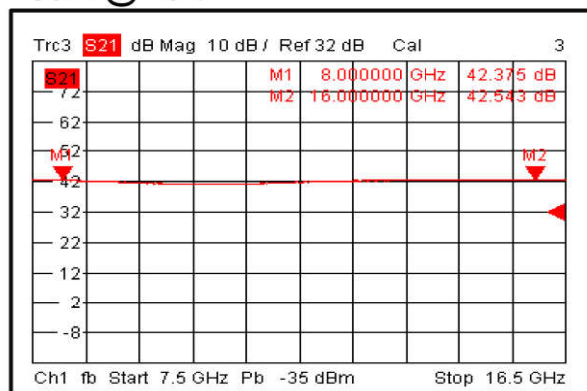


Input VSWR @-40°C

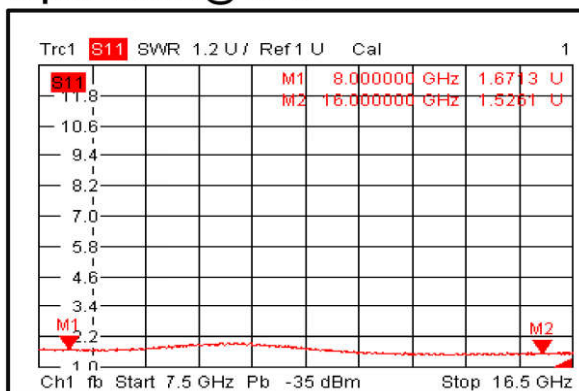

Output VSWR @-40°C

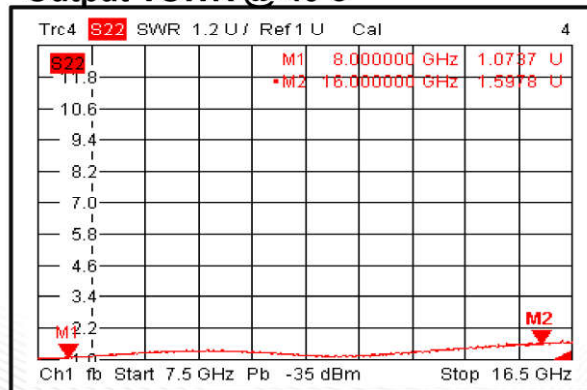


Isolation @-40°C

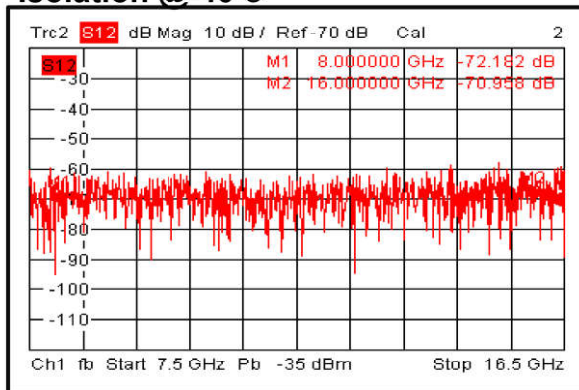





Gain @+85°C

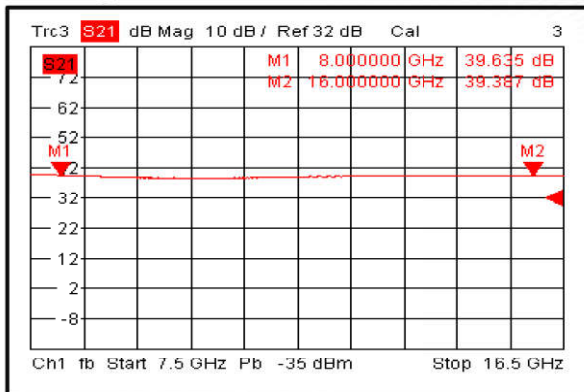


Input VSWR @+85°C

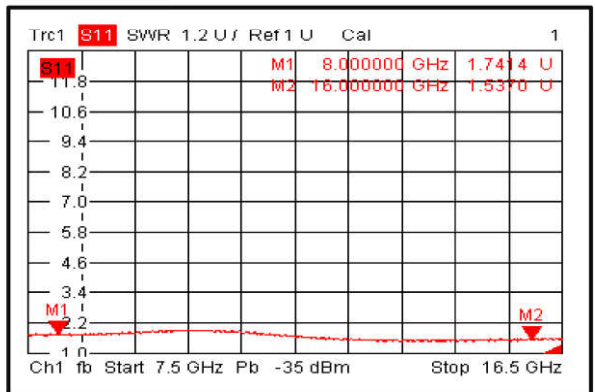


Output VSWR @+85°C

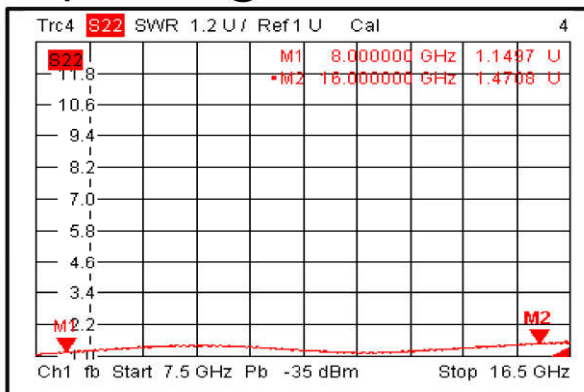


Isolation @+85°C

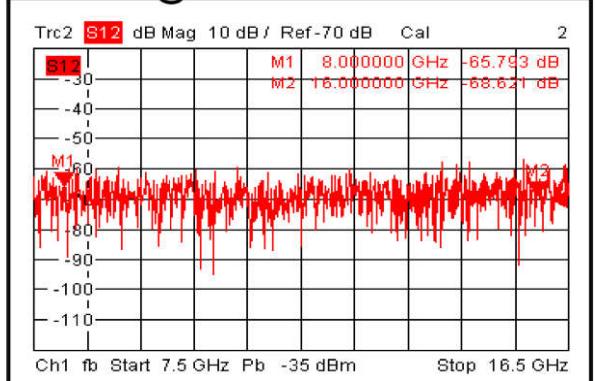


Gain vs. Output Power

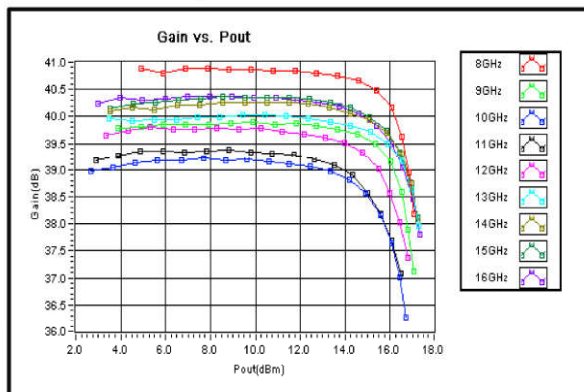


Output Third Order Intercept (OIP3)

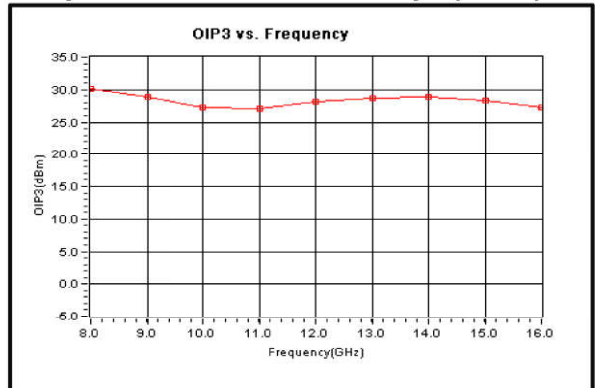


P1dB vs. Frequency

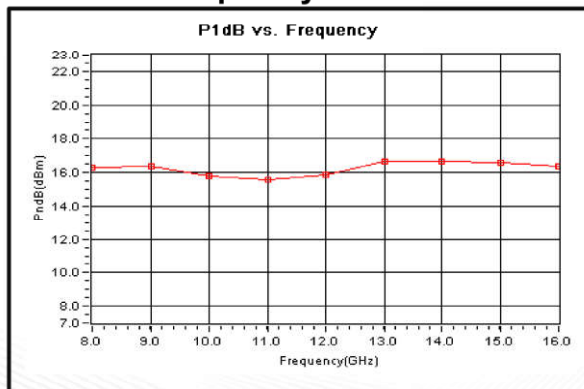


Noise Figure

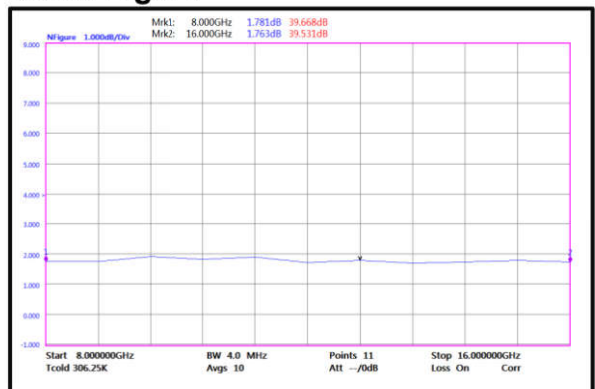

2nd Harmonic Wave Output Power

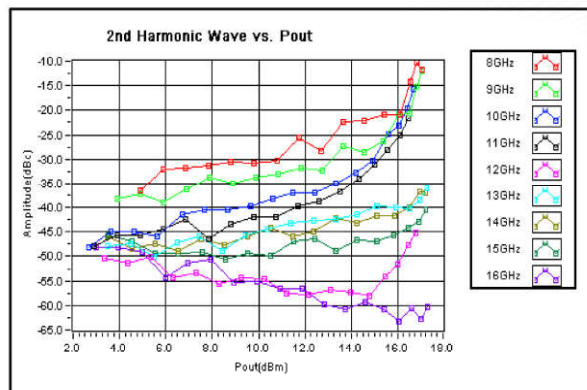

3rd Harmonic Wave Output Power

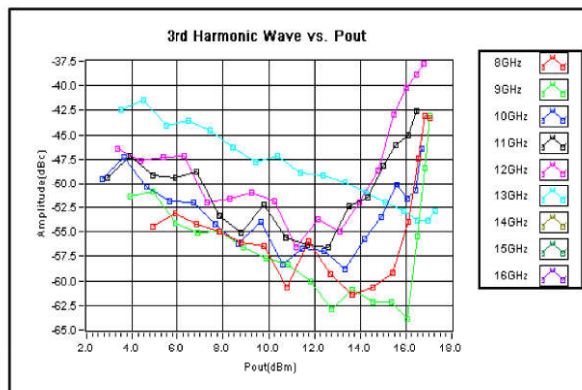

4th Harmonic Wave Output Power

