



# Wide Band Low Noise Amplifier 2GHz~6GHz

## Features

- Gain:46dB Typical
- Noise Figure: 1.6dB Typical
- P1dB Output Power: +24dBm Typical
- Supply Voltage: +12V
- 50 Ohm Matched



## Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT  
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	2		4	4		6	GHz
Gain	43	46	49	42	45	48	dB
Gain Flatness		±0.5	±1.5		±0.5	±1.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±1.0			±1.0		dB
Noise Figure		1.6	2.2		2.0	2.5	dB
Input VSWR		1.6	2.2		1.6	2.2	: 1
Output VSWR		1.6	2.2		1.6	2.2	: 1
Output Power for 1 dB Compression (P1dB)	22	24		21	23		dBm
Saturated Output Power (Psat)		26			27		dBm
Output Third Order Intercept (OIP3)		33			33		dBm
Supply Current (Vcc=+12V)		280	350		280	350	mA
Isolation S12		-65			-65		dB

Weight	6.15 Max.(Including Heat sink)	Impedance	50ohms
Input / Output Connectors	SMA-Female	Material	Aluminum
Finish	Nickel Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Optional)



### Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power (RFIN)	0dBm

### Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

### Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


### Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

### Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

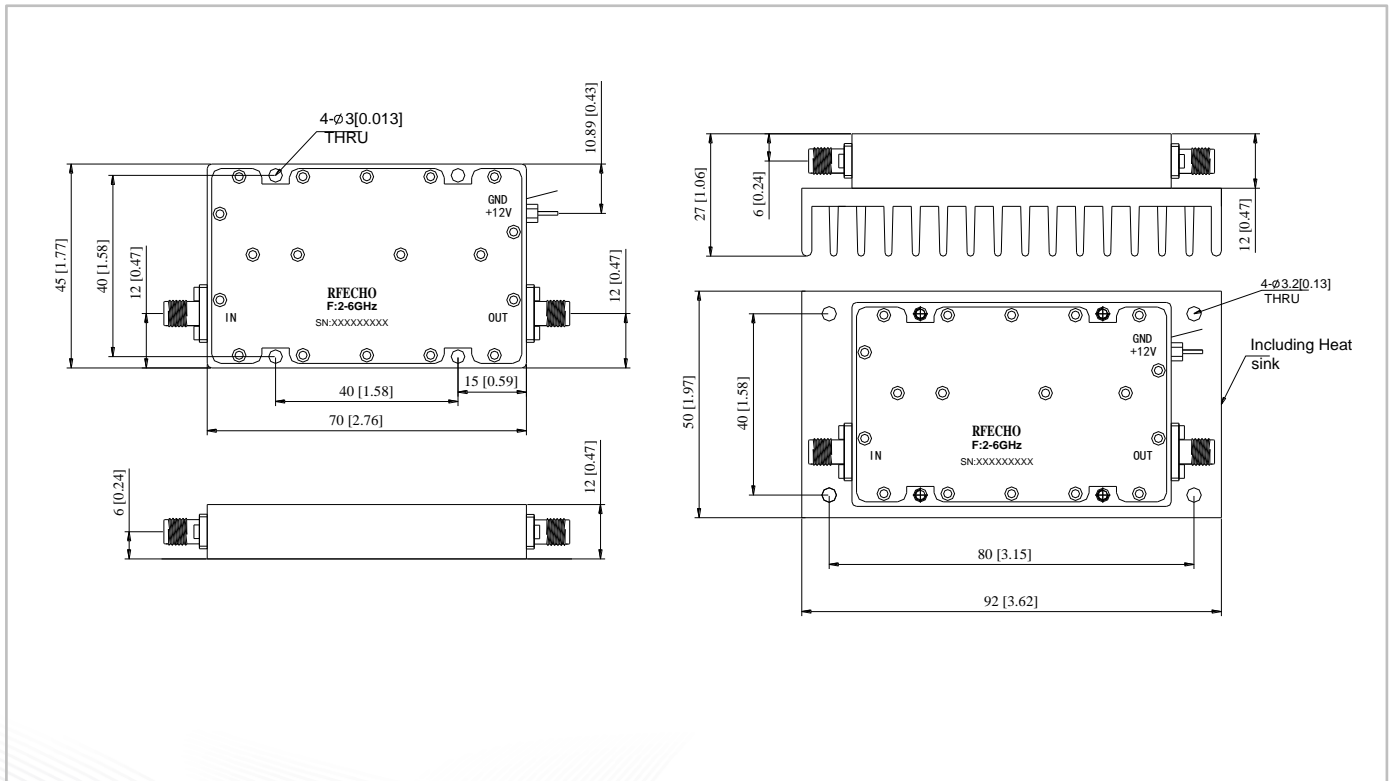





### Gain @+25°C

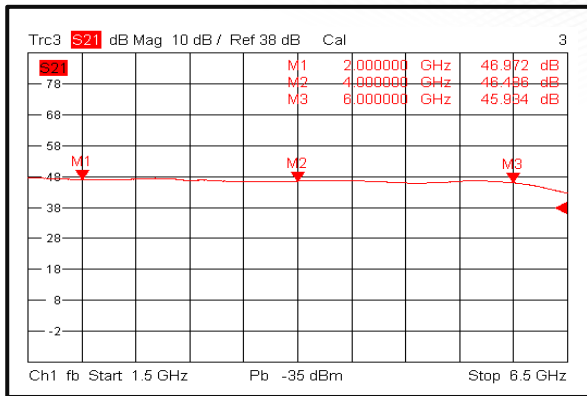


### Input VSWR @+25°C

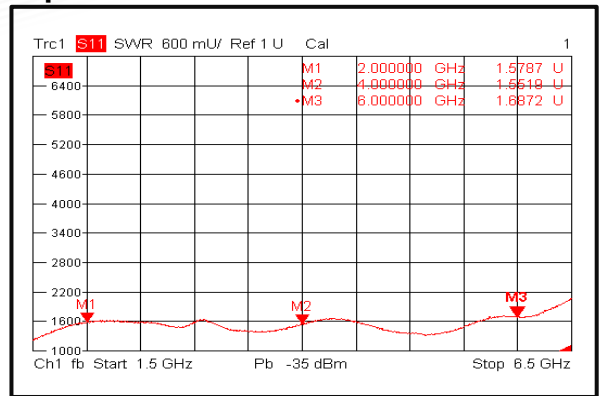


### Output VSWR @+25°C

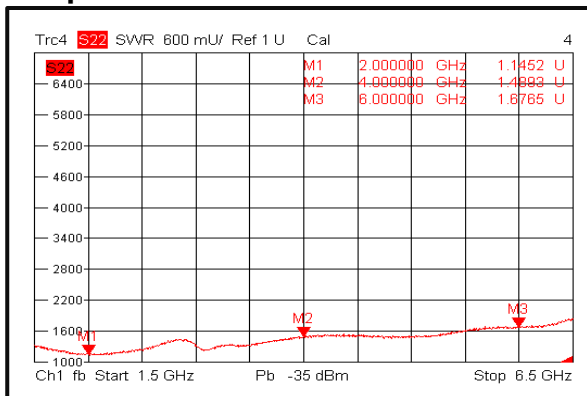


### Isolation @+25°C

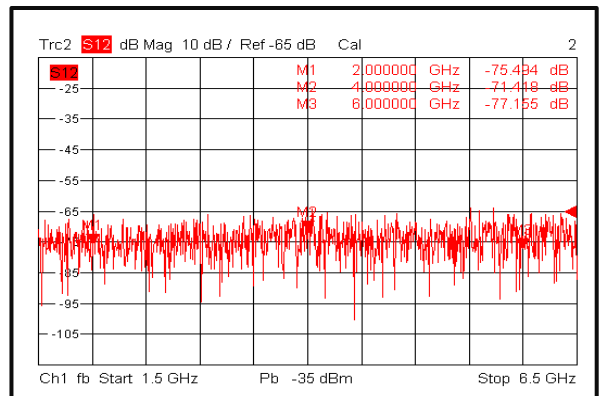


### Gain @-40°C

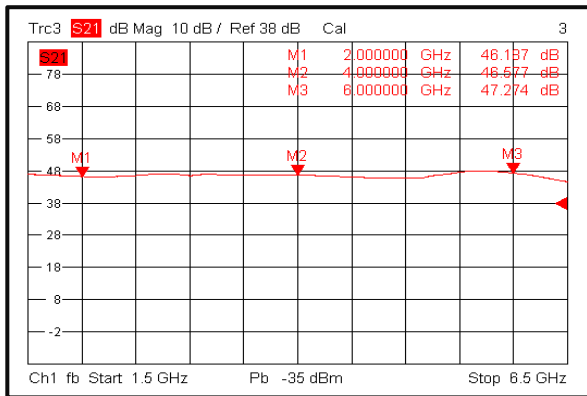


### Input VSWR @-40°C

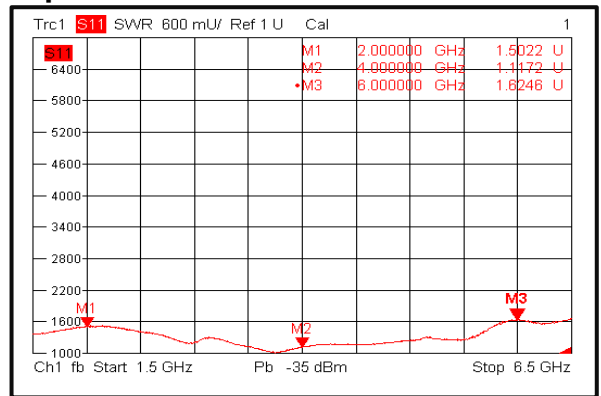

### Output VSWR @-40°C

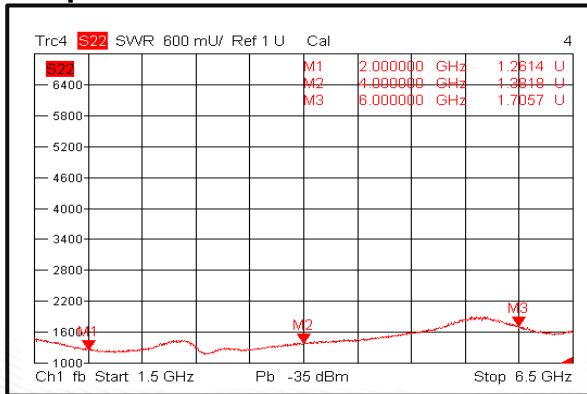


### Isolation @-40°C

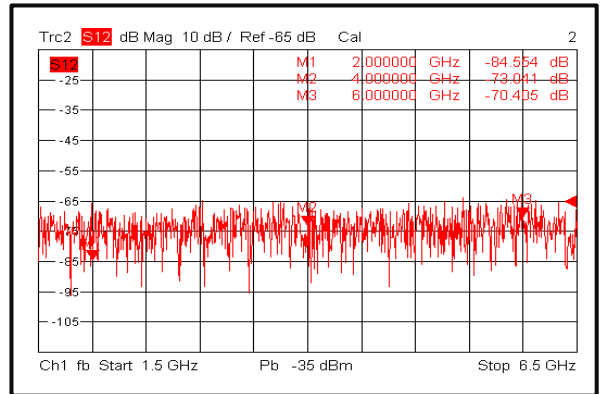





### Gain@+85°C

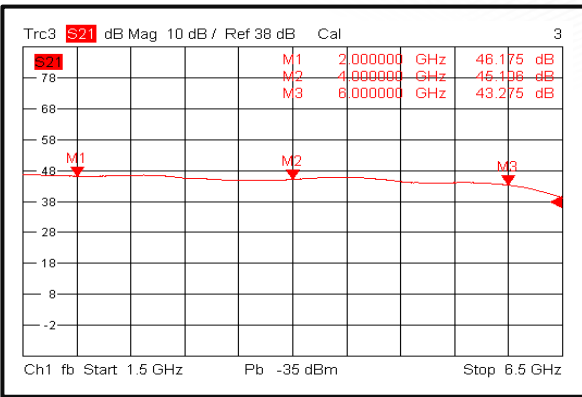


### Input VSWR@+85°C

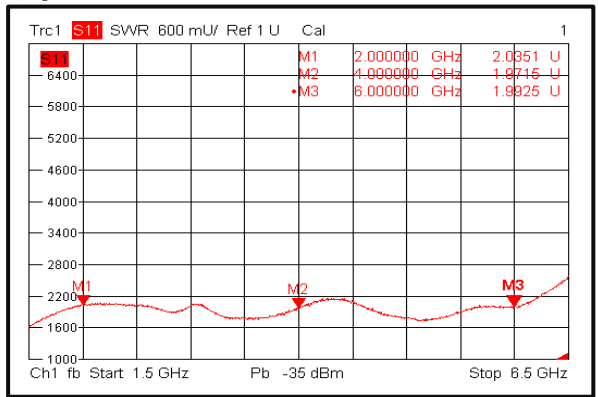


### Output VSWR@+85°C

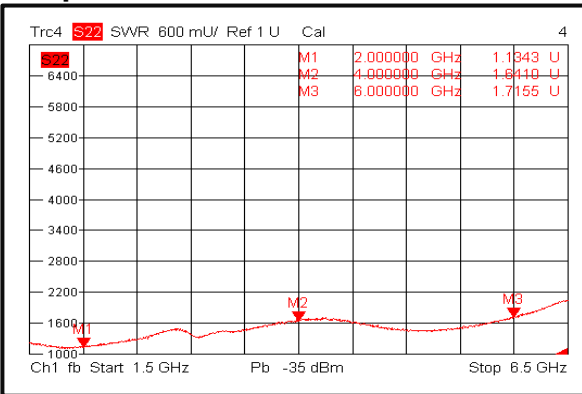


### Isolation@+85°C

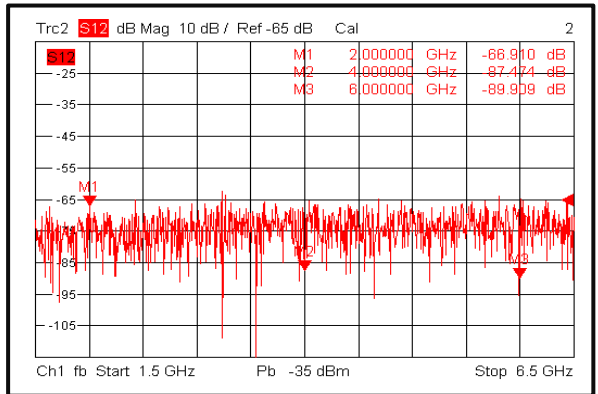


### Gain vs. Output Power

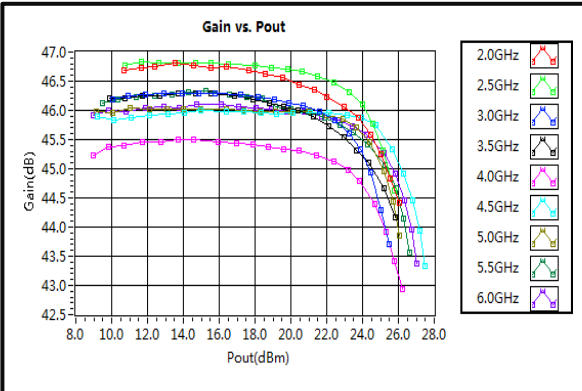


### P1dB vs. Frequency

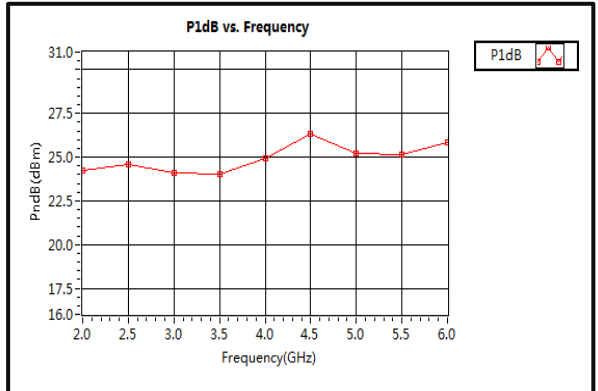

### Saturation Power vs. Frequency

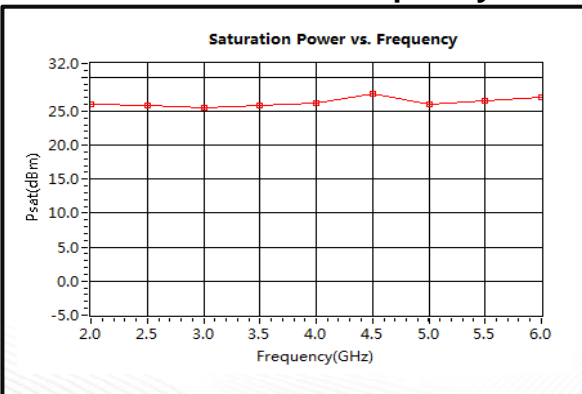


### Output Third Order Intercept (OIP3)

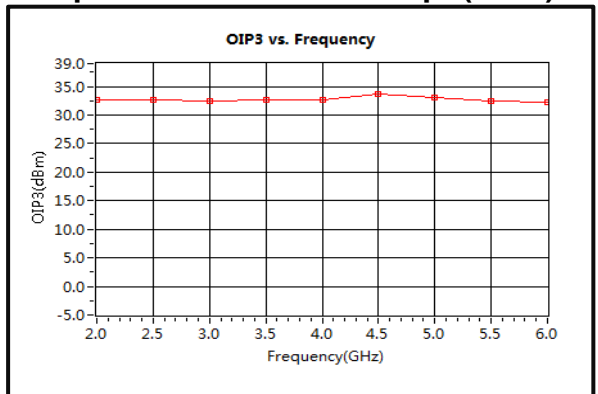





### Noise Figure (2GHz-4GHz)

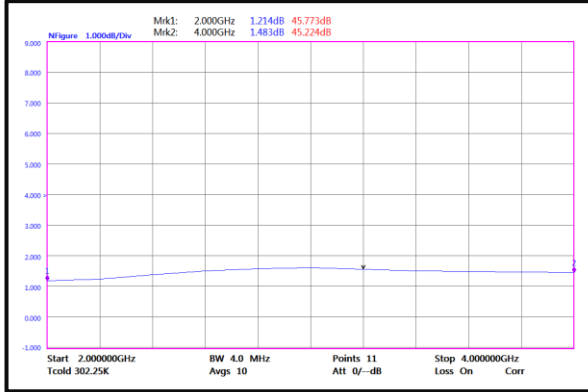


### Noise Figure (4GHz-6GHz)

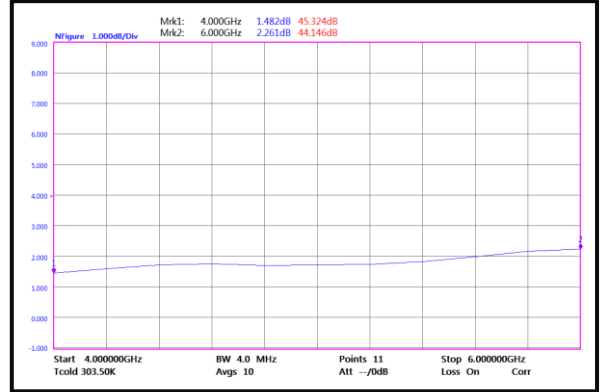

### 2nd Harmonic Wave Output Power

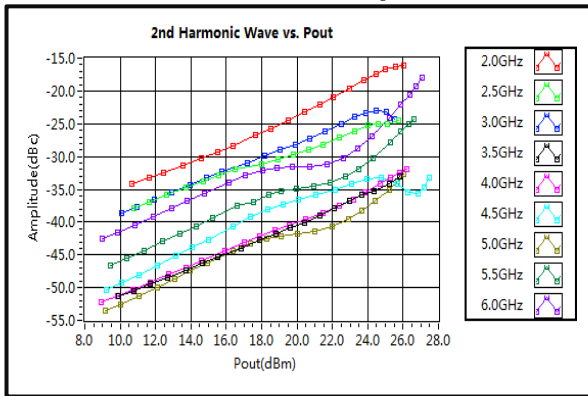

### 3rd Harmonic Wave Output Power

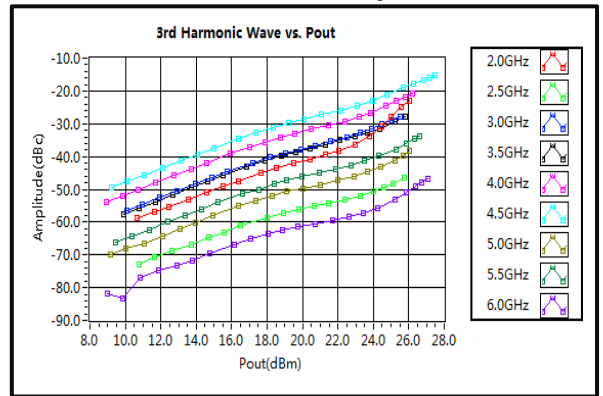

### 4th Harmonic Wave Output Power

