




Wide Band Low Noise Amplifier 0.55GHz~1.2GHz

Features

- Gain: 16dB Typical
- Noise Figure: 0.5dB Typical
- P1dB Output Power: +20dBm Typical
- Supply Voltage: +3v & +5V

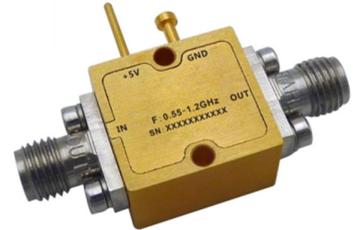

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	+3V			+5V			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range	0.55		1.2	0.55		1.2	GHz
Gain		15		12	16.5		dB
Gain Flatness		±3.0			±3.0	±3.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±0.5			±0.5	±0.8	dB
Noise Figure		0.7			0.8	1.6	dB
Input VSWR		1.5			1.5		: 1
Output VSWR		1.8			1.8		: 1
Output Power for 1 dB Compression (P1dB)		16		16	20		dBm
Saturated Output Power (Psat)		17			21		dBm
Output Third Order Intercept (OIP3)		29			37		dBm
Supply Current (Idd)		40			90	115	mA
Isolation S12		-20			-20		dB

Weight	0.4 Max. ounces	Impedance	50 ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+6V
RF Input Power	+10dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +5V biasing

Power OFF Procedure

Step 1	Turn off +5V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C ~ +85°C (Case Temperature)
Storage Temperature	-50°C ~ +105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation (Sold Separately)

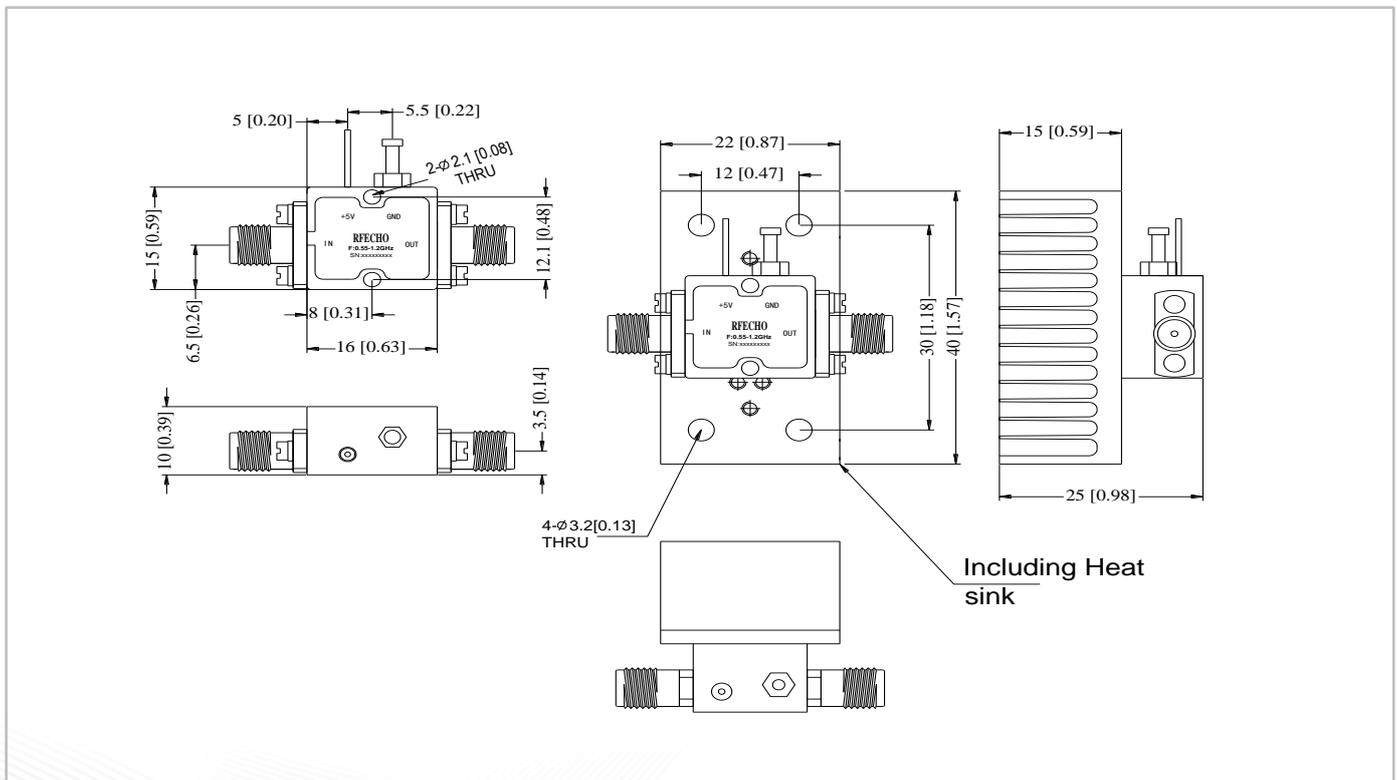





Gain @+25°C(+3V)

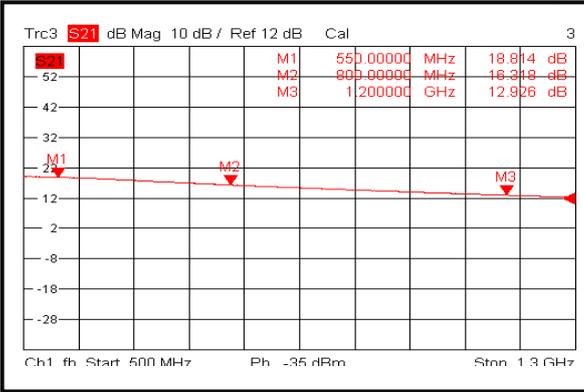


Input VSWR @+25°C(+3V)

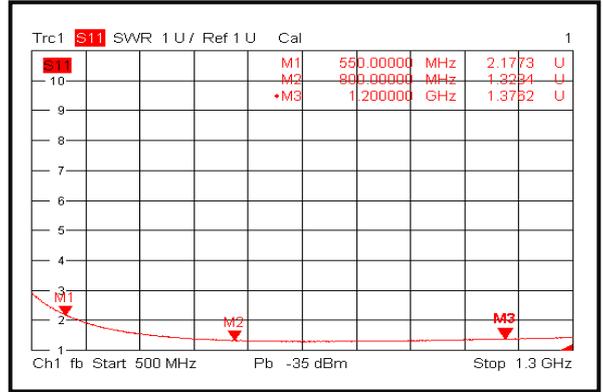


Output VSWR @+25°C(+3V)

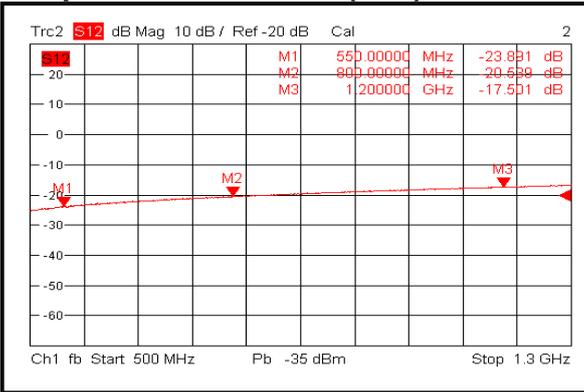


Isolation @+25°C(+3V)

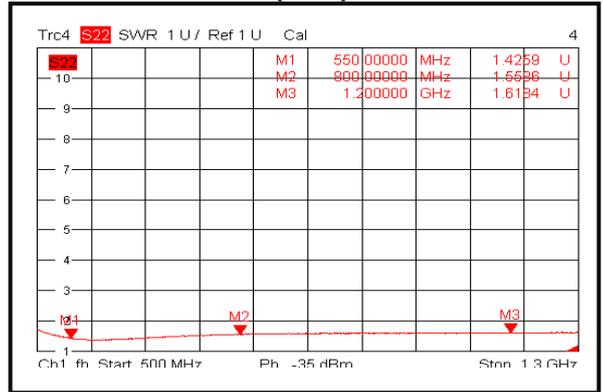

Gain @+25°C(+5V)

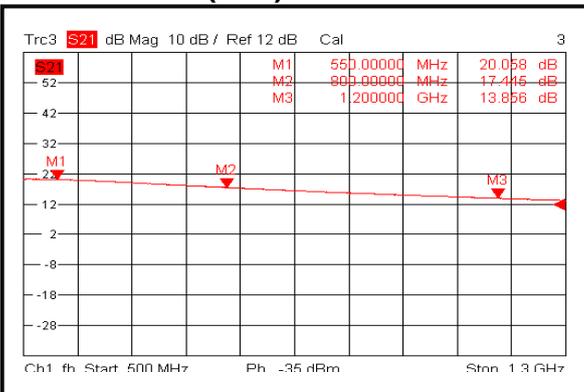


Input VSWR @+25°C(+5V)

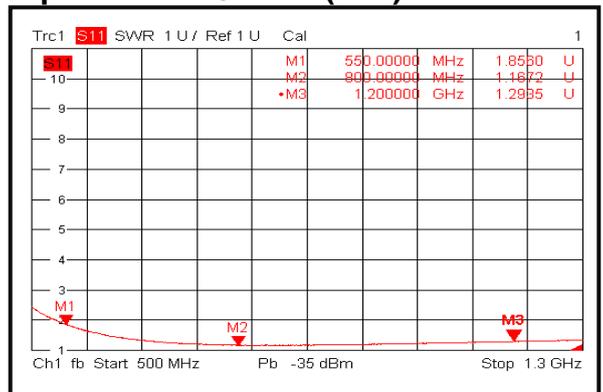





Output VSWR @+25°C(+5V)

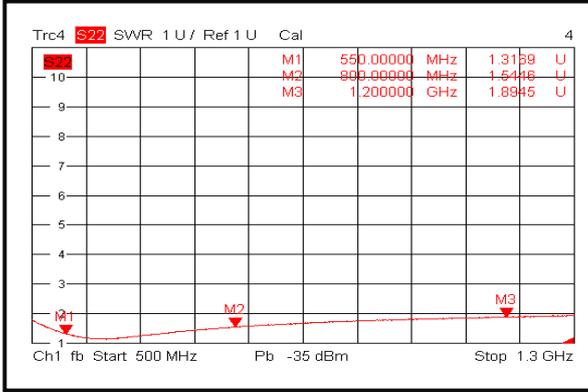


Isolation @+25°C(+5V)

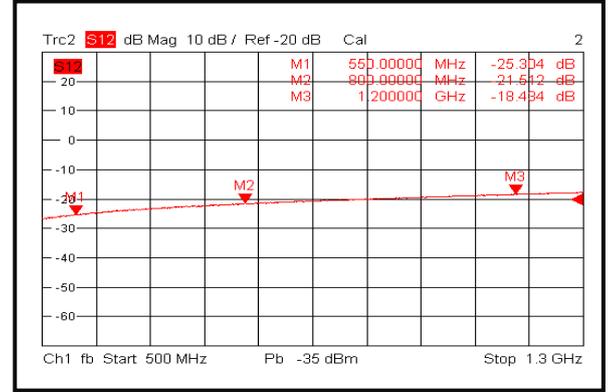


Gain @-40°C(+3V)

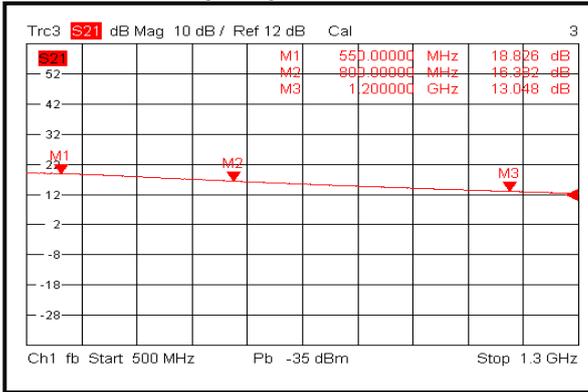


Input VSWR @-40°C(+3V)

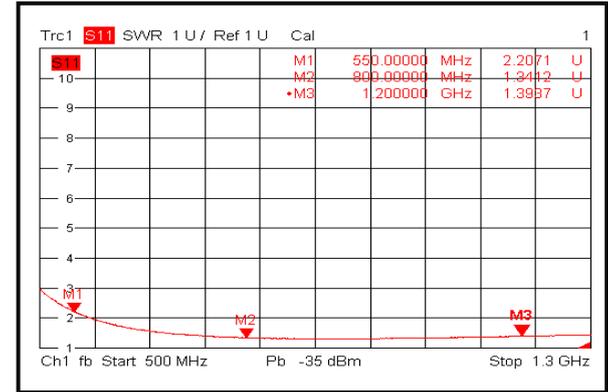

Output VSWR @-40°C(+3V)

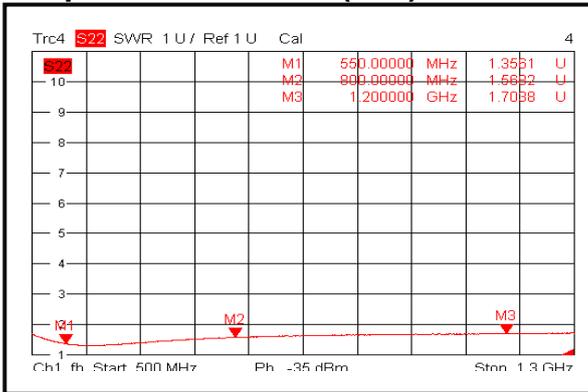


Isolation @-40°C(+3V)

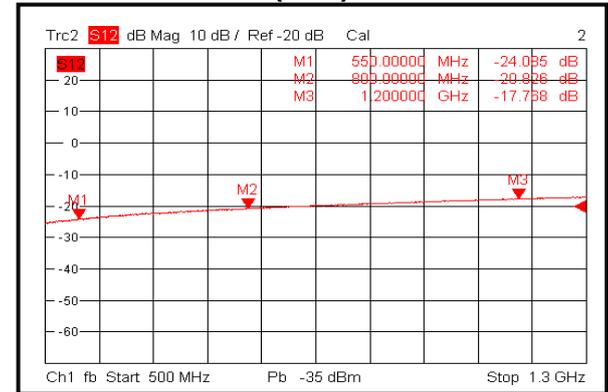





Gain @-40°C(+5V)

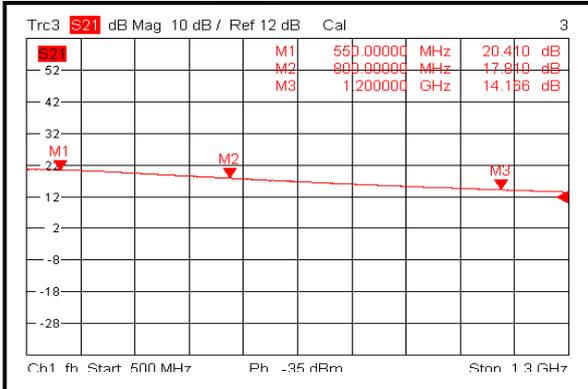


Input VSWR @-40°C(+5V)

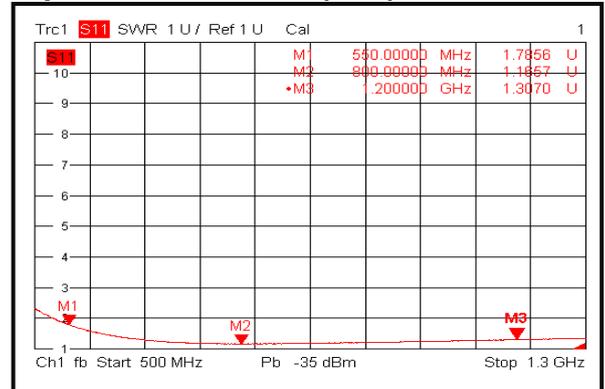


Output VSWR @-40°C(+5V)

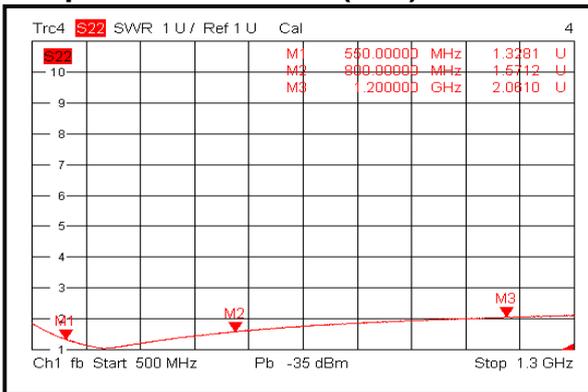


Isolation @-40°C(+5V)

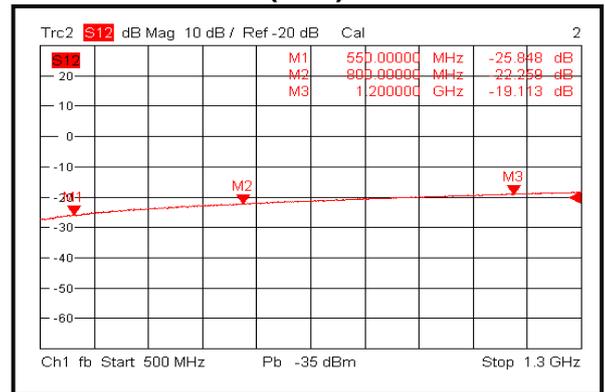

Gain @+85°C(+3V)

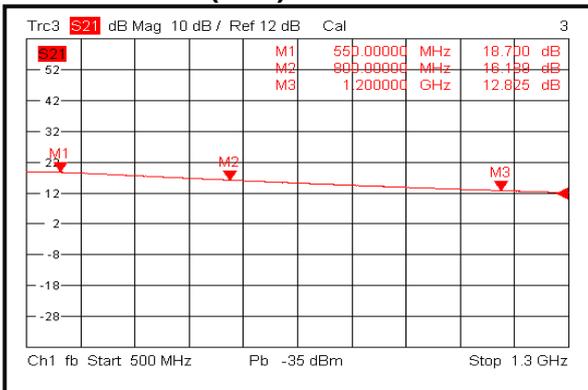


Input VSWR @+85°C(+3V)

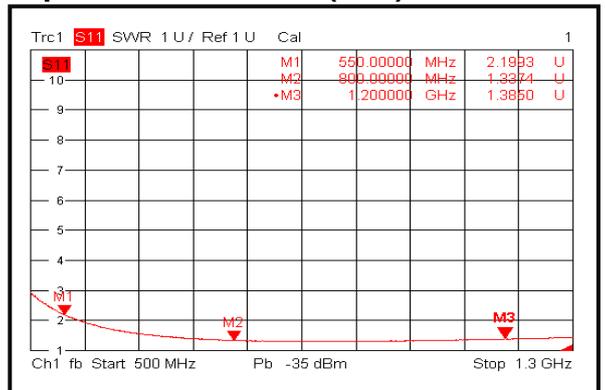





Output VSWR @+85°C(+3V)

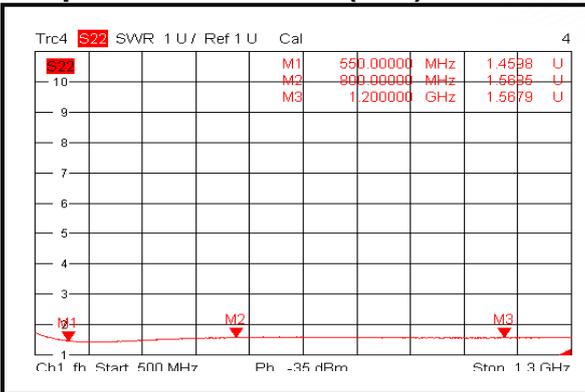


Isolation @+85°C(+3V)

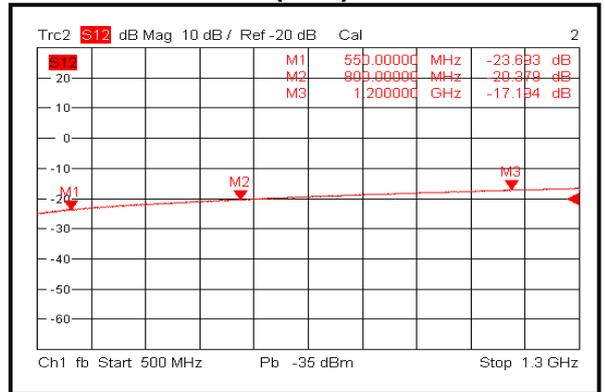


Gain @+85°C(+5V)

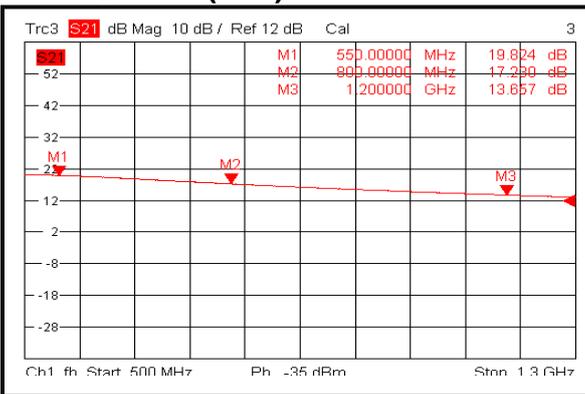


Input VSWR @+85°C(+5V)

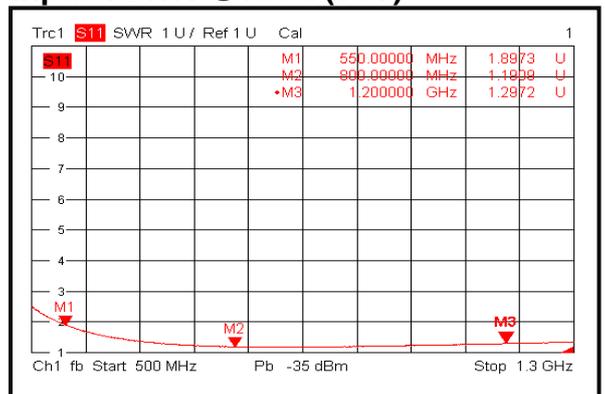

Output VSWR @+85°C(+5V)

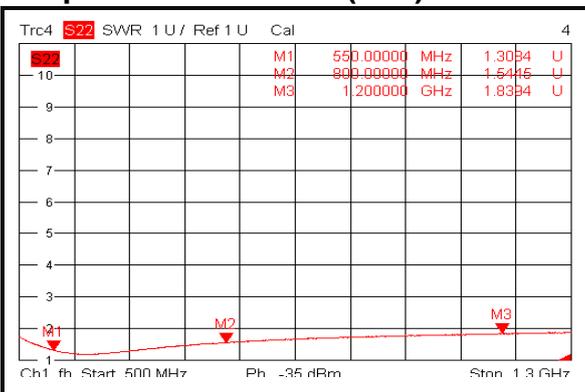


Isolation @+85°C(+5V)

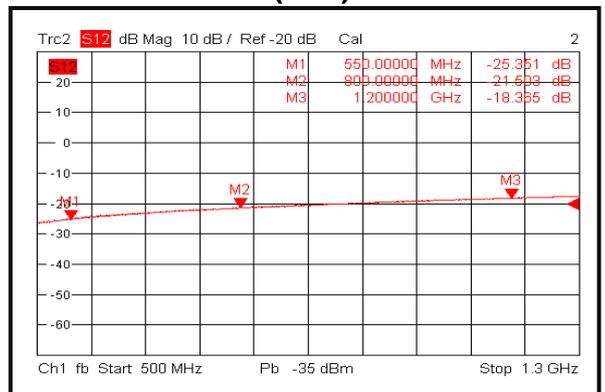





Gain vs. Output Power

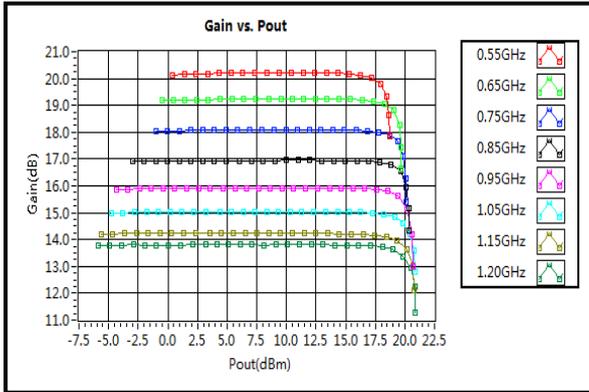


P1dB vs. Frequency

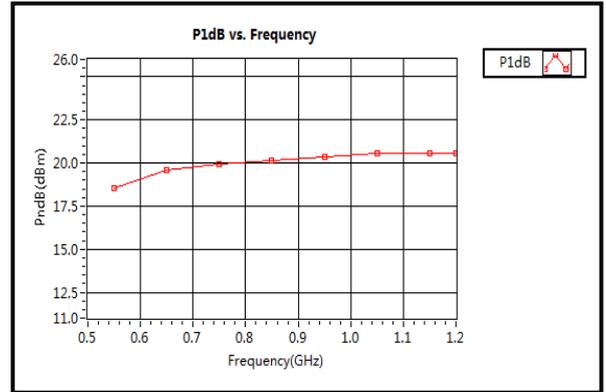


Output Third Order Intercept (OIP3)

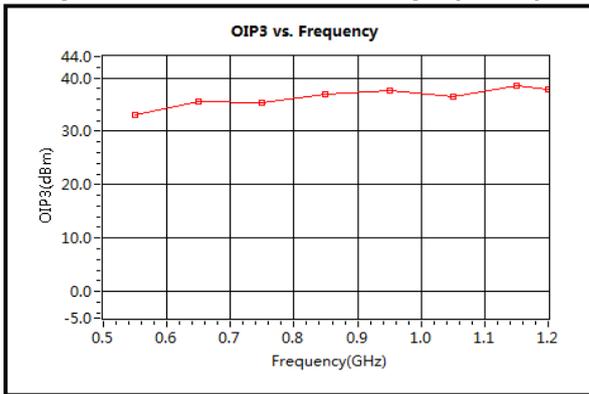


Noise Figure

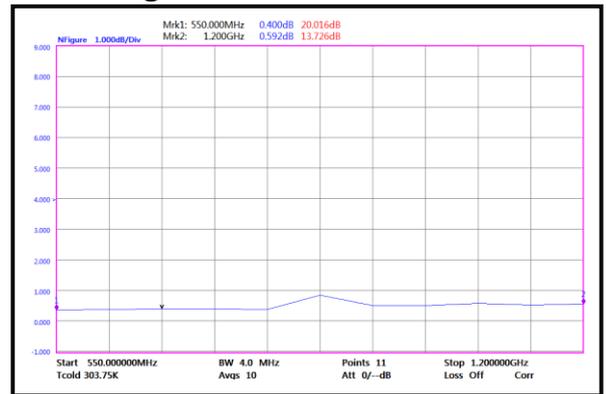

Saturation Power vs. Frequency

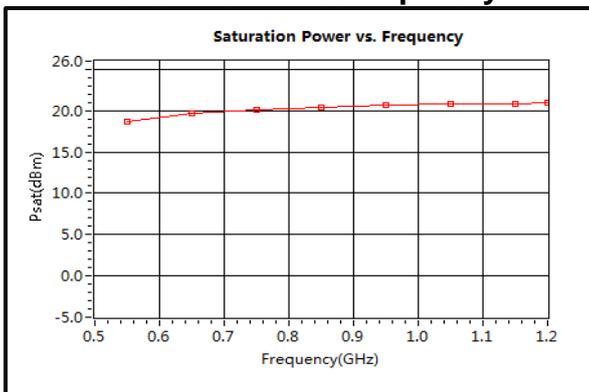


2nd Harmonic Wave Output Power

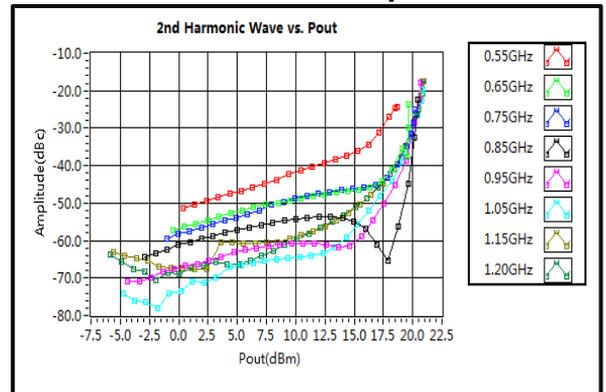



3rd Harmonic Wave Output Power

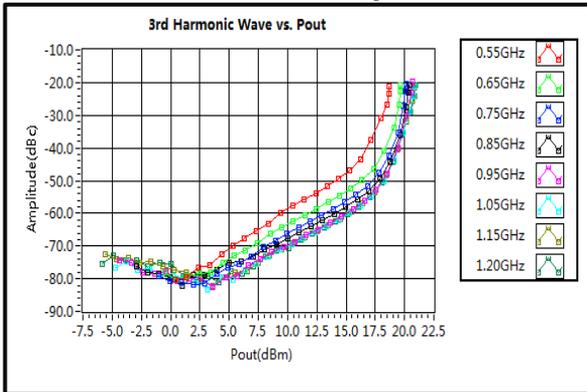

4th Harmonic Wave Output Power

