



Wide Band Low Noise Amplifier 6GHz~18GHz

Features

- Gain: 39 dB Typical
- Noise Figure: 2.2 dB Typical
- P1dB Output Power: +28 dBm Typical
- Supply Voltage: +12 V
- 50 Ohm Matched Input / Output
- Size: 1.57" x 1.18" x0.47"



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Units
Frequency Range	6		18	GHz
Gain	35	39		dB
Gain Flatness		±2.0	±3.0	dB
Gain Variation Over Temperature (-40°C~+85°C)		±1.0		dB
Noise Figure		2.2	3.0	dB
Input VSWR		2.0	2.5	: 1
Output VSWR		1.8	2.2	: 1
Output 1dB Compression Point (P1dB)	26	28		dBm
Saturated Output Power (Psat)	27	30		dBm
Output Third Order Intercept (OIP3)		35		dBm
Supply Current (Idd) (Vcc=+12V)		500	1000	mA
Isolation S12		-60		dB

Weight	3.5 ounces (Max.)	Impedance	50ohms
Input / Output Connectors	SMA-Female	Material	copper
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)

Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power (RFIN)	-3dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

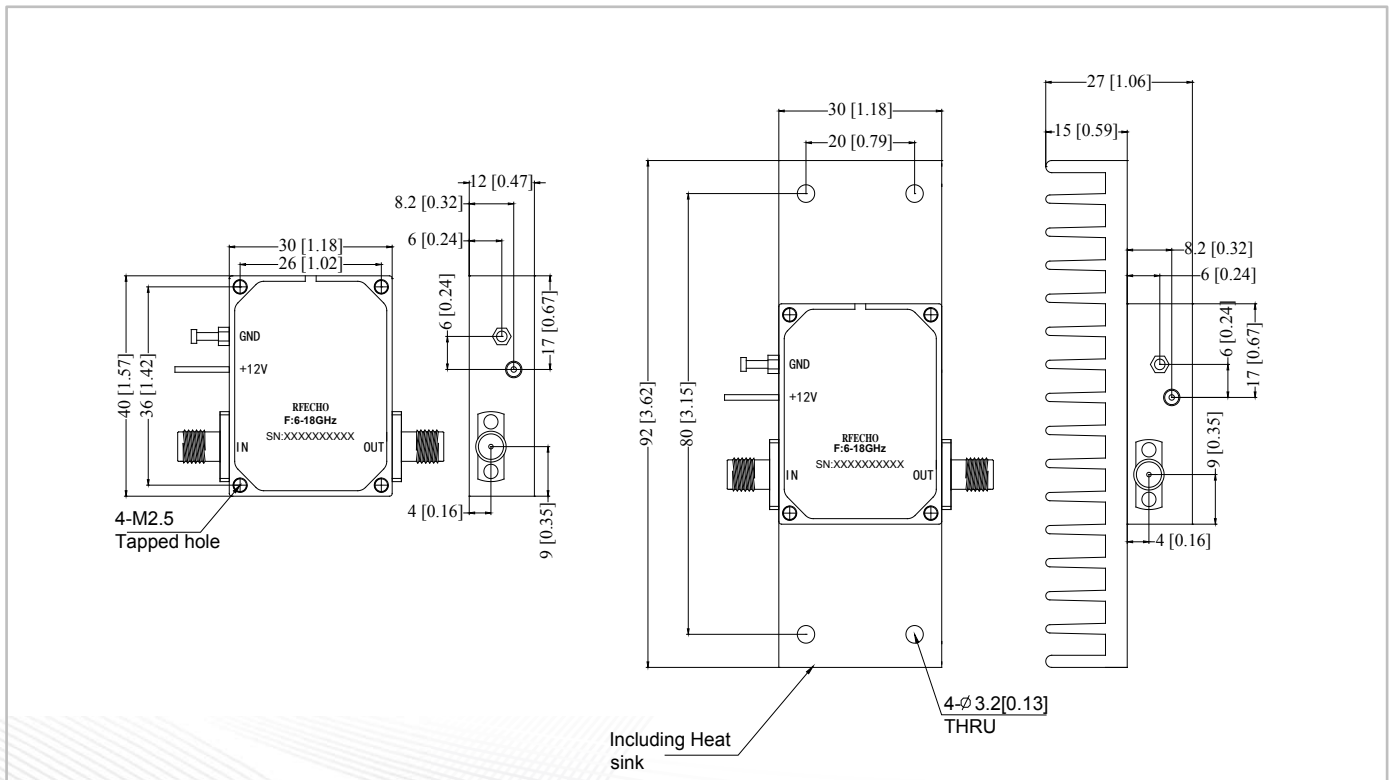





Gain @+85°C

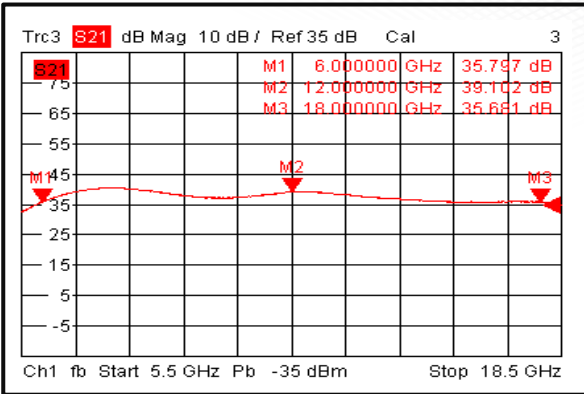


Input VSWR @+85°C

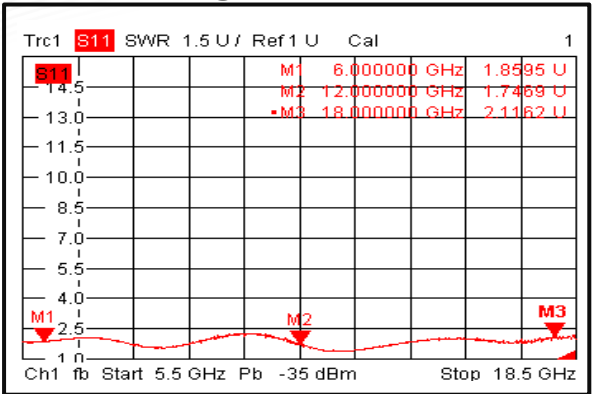


Output VSWR @+85°C

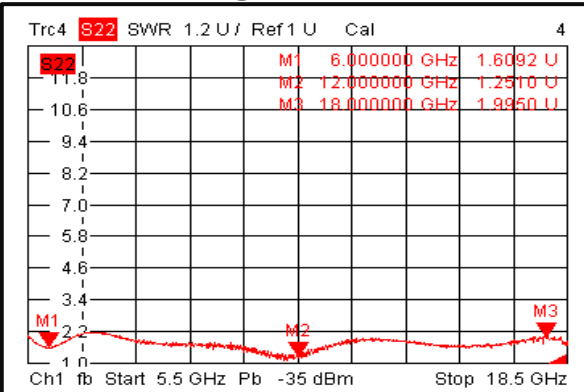


Isolation @+85°C

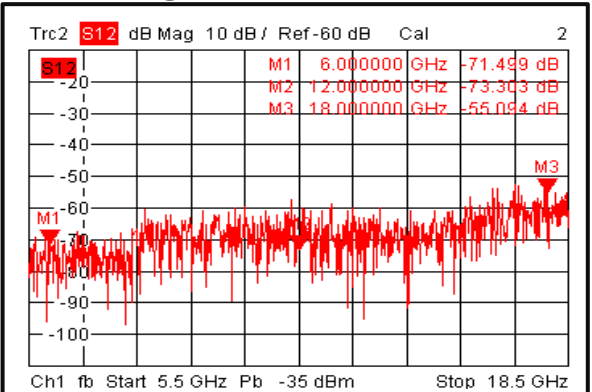


Gain vs. Output Power

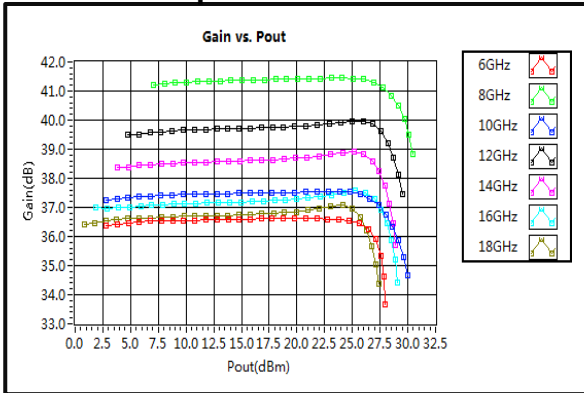


P1dB vs. Frequency

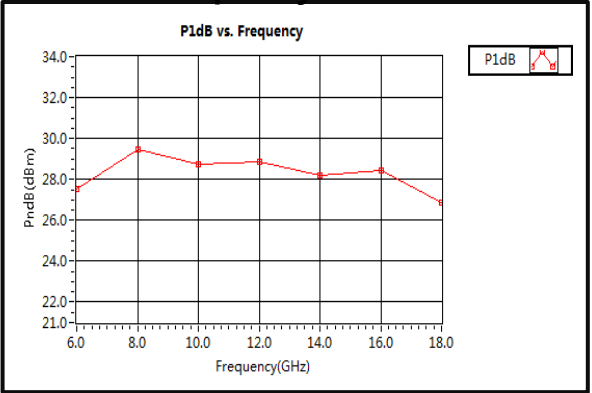

Output Third Order Intercept (OIP3)

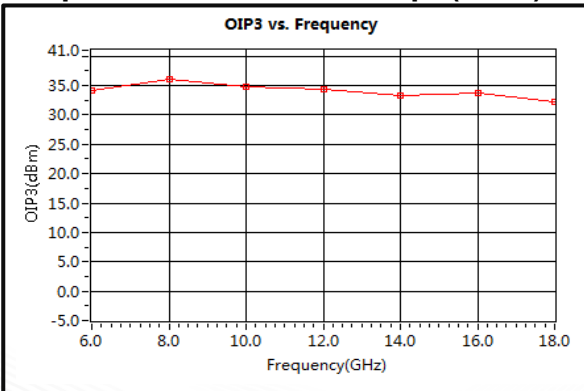


Saturation Power vs. Frequency

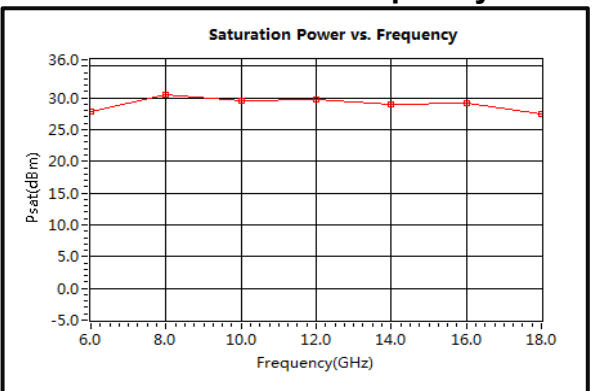





Gain @+85°C

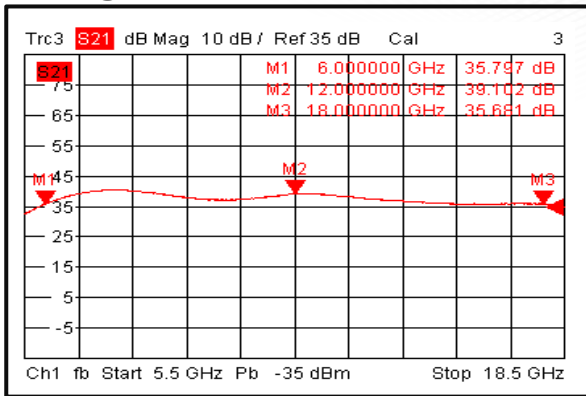


Input VSWR @+85°C

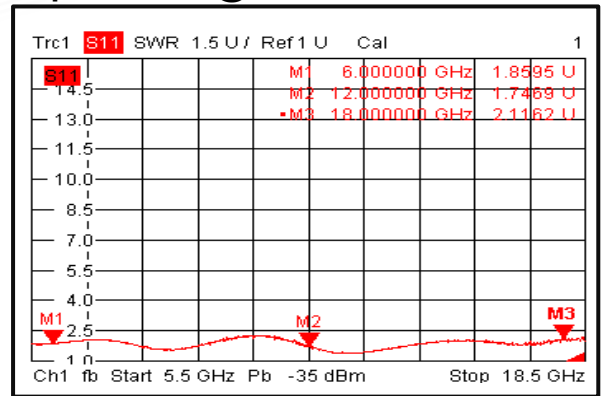


Output VSWR @+85°C

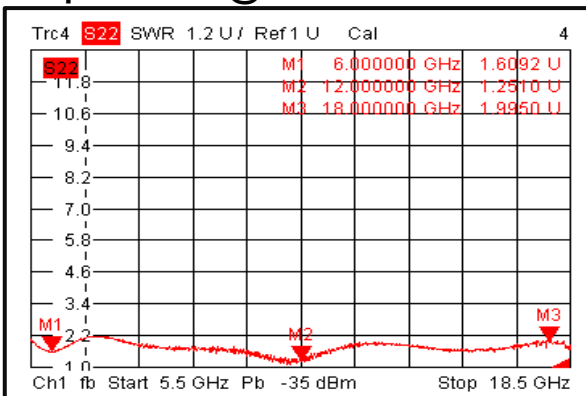


Isolation @+85°C

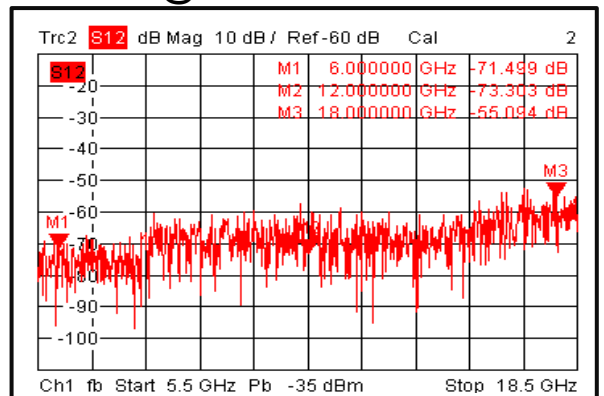


Gain vs. Output Power

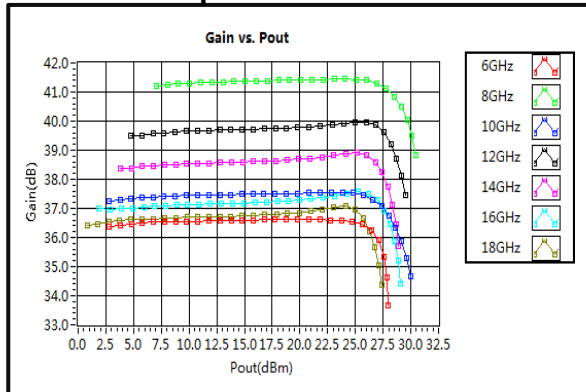


P1dB vs. Frequency

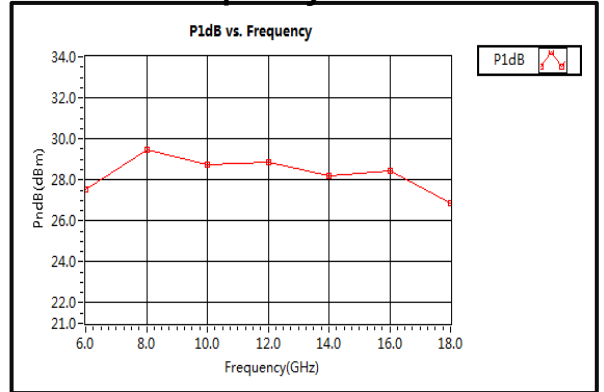

Output Third Order Intercept (OIP3)

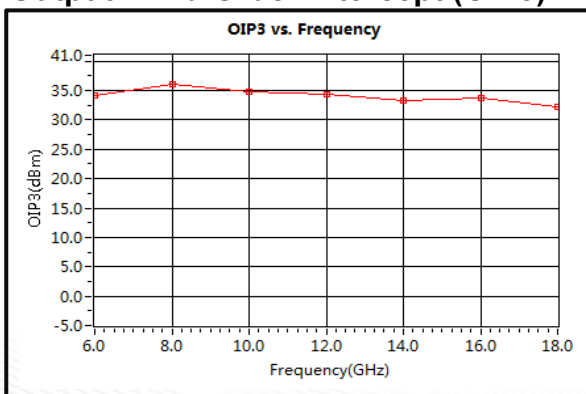

Saturation Power vs. Frequency

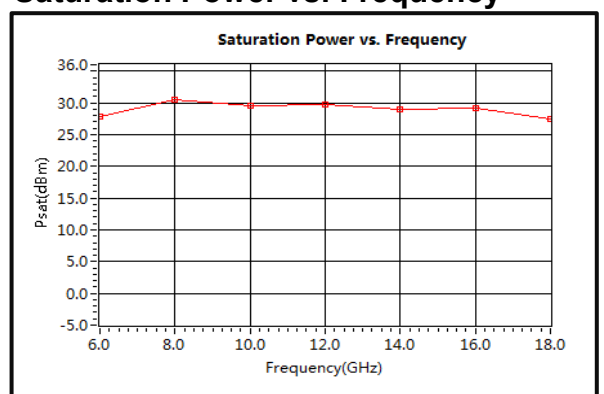





Noise Figure



2nd Harmonic Wave Output Power

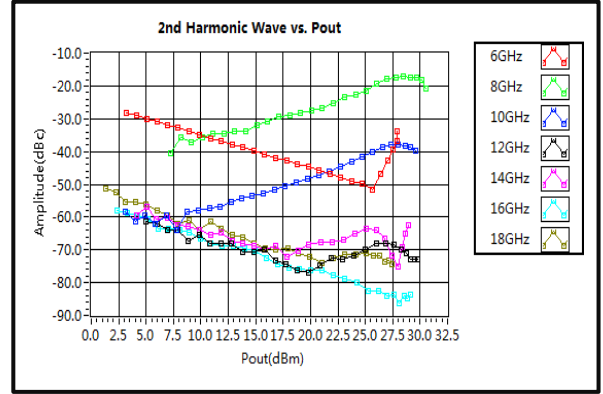

3rd Harmonic Wave Output Power

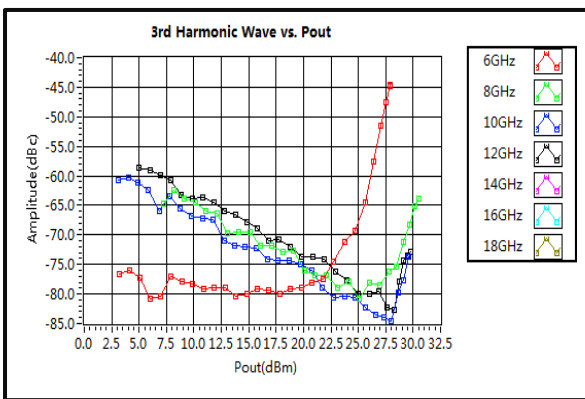

4th Harmonic Wave Output Power

