




Low Noise Amplifier 17.7GHz~26GHz

Features

- Gain: 28dB Typical
- Noise Figure: 2.2dB Typical
- P1dB Output Power: +21dBm Typical
- Supply Voltage: +12V @ 160mA
- 50 Ohm Matched

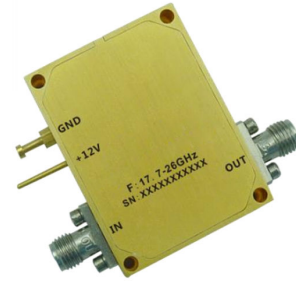

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	17.7		21	21		26	GHz
Gain	26	28		25	27.5		dB
Gain Flatness		±0.5	±1.0		±1.0	±1.5	dB
Gain Variation Over Temperature (-40°C~+85°C)		±0.8			±1.0		dB
Noise Figure		2.2	3.0		2.2	3.0	dB
Input VSWR		1.5	1.8		1.5	1.8	: 1
Output VSWR		1.7	2.0		1.6	1.8	: 1
Output 1dB Compression Point (P1dB)	17	21		19	21		dBm
Saturated Output Power (Psat)		23			23		dBm
Output Third Order Intercept (OIP3)		25			25		dBm
Supply Current (I _{dd}) (V _{cc} =+12V)		160	200		160	200	mA
Isolation S12		-70			-65		dB

Weight	3.53 ounces	Impedance	50ohms
Input / Output Connectors	2.92-Female	Material	Aluminum
Finish	Gold Plated	Package Sealing	Epoxy Sealed (Standard)
			Hermetically Sealed (Option with extra charge)



Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power (RFIN)	-2dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:


All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

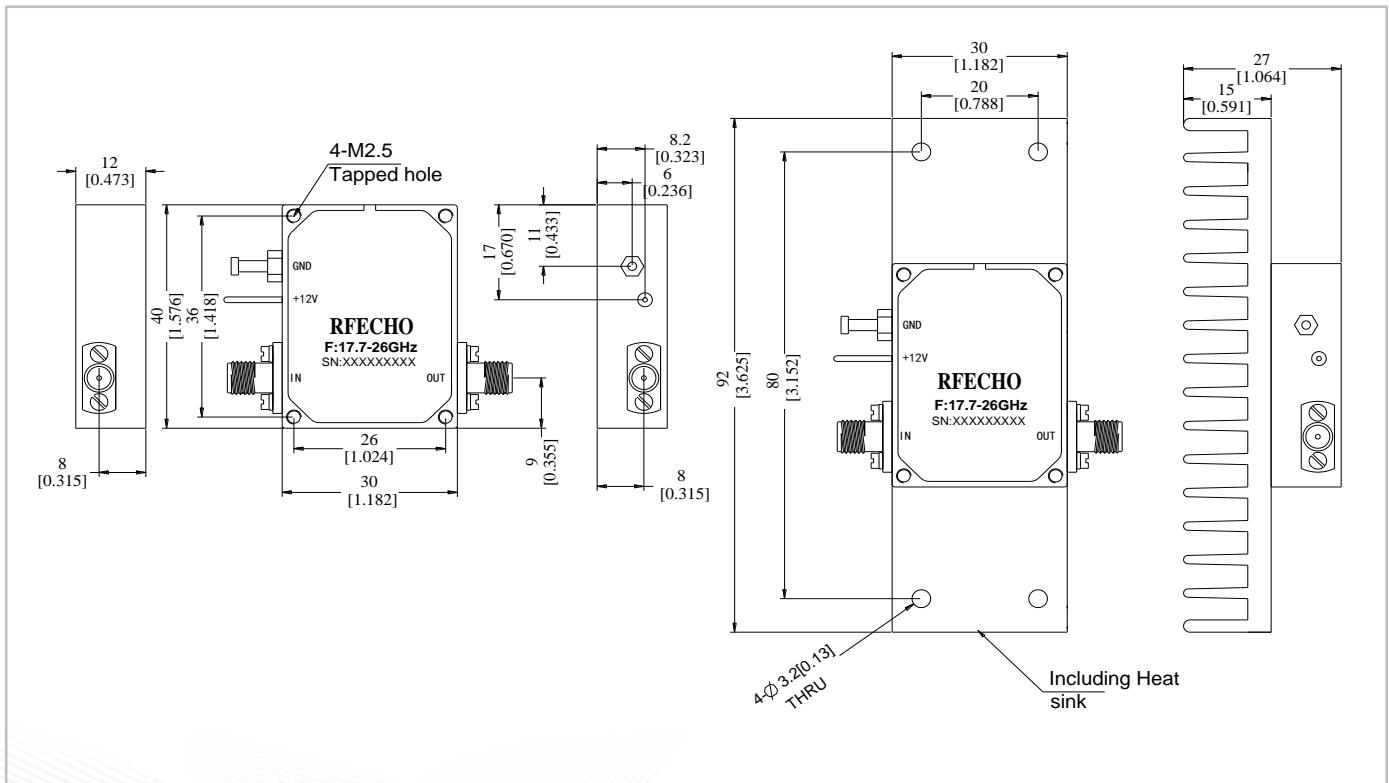





Gain

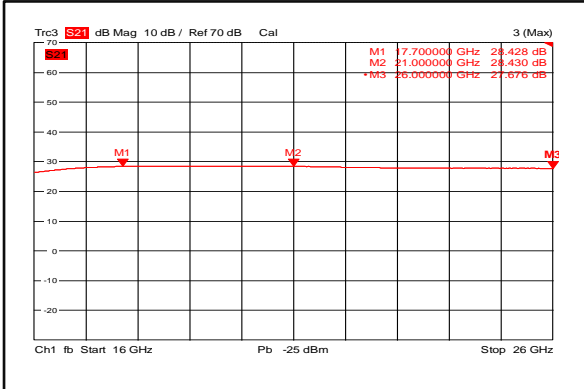


Input VSWR

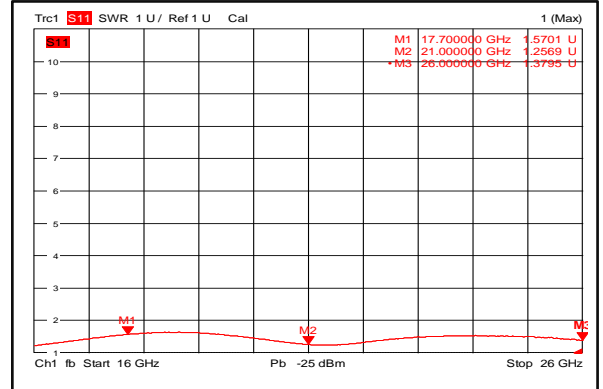


Output VSWR

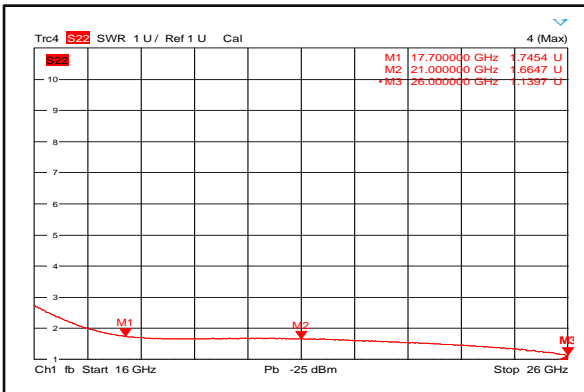


Isolation

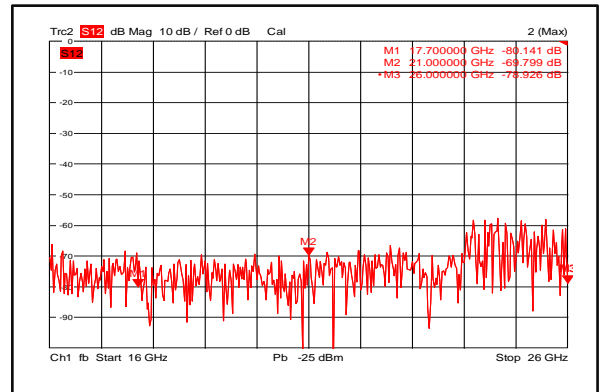

Gain vs. Output Power

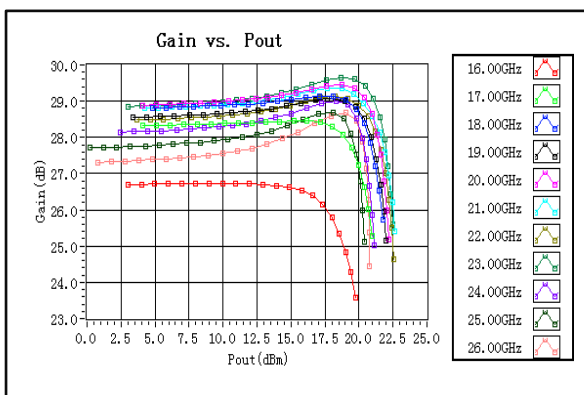


P1dB vs. Frequency

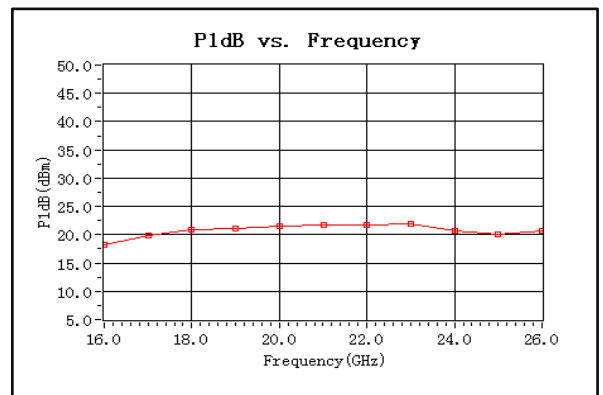




Output Third order Intercept (OIP3)

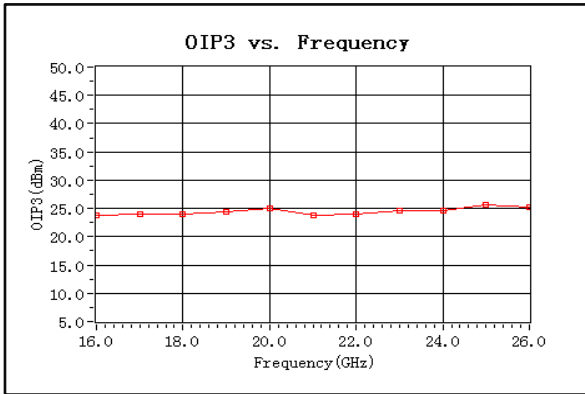

Noise Figure

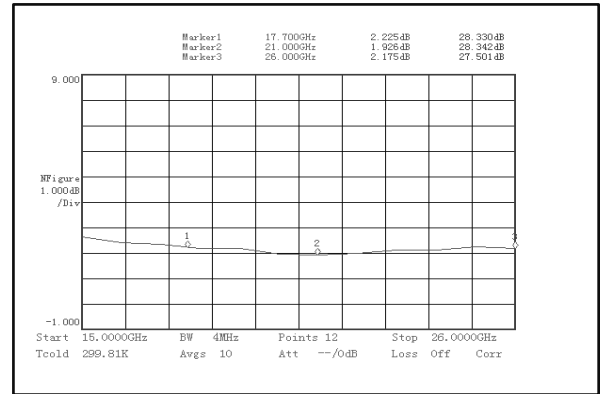

2nd Harmonic Wave Output Power

