



Ultra Wide Band AC-Low Noise Amplifier 1GHz~40GHz

Features

- High Output Power 18dBm Typical.
- High peak to average handling capability.
- High linearity and low noise figure.
- Convenient AC Power Input. (AC 110V/220V)
- Integrated Heat Sink and Fan.



Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameters	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	1		18	18		40	GHz
Gain	40	45	49	39	43	46	dB
Gain Flatness		± 3.0			± 2.5		dB
Gain Variation Over Temperature (-40°C~+85°C)		± 1.5			± 1.5		dB
Noise Figure		4.0			5.0		dB
Input VSWR		1.6	2.5		2.5		: 1
Output VSWR		1.6	2.0		2.0		: 1
Output 1dB Compression Point (P1dB)	18	22		13	18		dBm
Saturated Output Power (Psat)		23			20		dBm
Output Third Order Intercept (OIP3)		27			22		dBm
Isolation S12		-70			-60		dB
Supply Current (Idd) (AC=110~220V)		120			120		mA

Weight	38 ounces (Max.)	Impedance	50ohms
Input /Output Connectors	2.92mm-Female	Material	Aluminum
Finish	Gray Painted		



Absolute Maximum Ratings

Supply Voltage	AC110~220V
RF Input Power(RFIN)	1-6GHz -22dBm 6-26.5GHz -18dBm 26.5-40GHz-15dBm

Environmental Specifications

Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Biasing Up Procedure


Step 1	Connect input and output with 50 Ohm source and load with in band return loss better than 10dB.
Step 2	Connect AC Plug
Step 3	Flip switch to "ON" position

Power OFF Procedure

Step 1	Flip switch to "OFF" position
Step 2	Remove AC Plug
Step 3	Remove RF Connection


Outline Drawing:

All Dimensions in mm (inches)

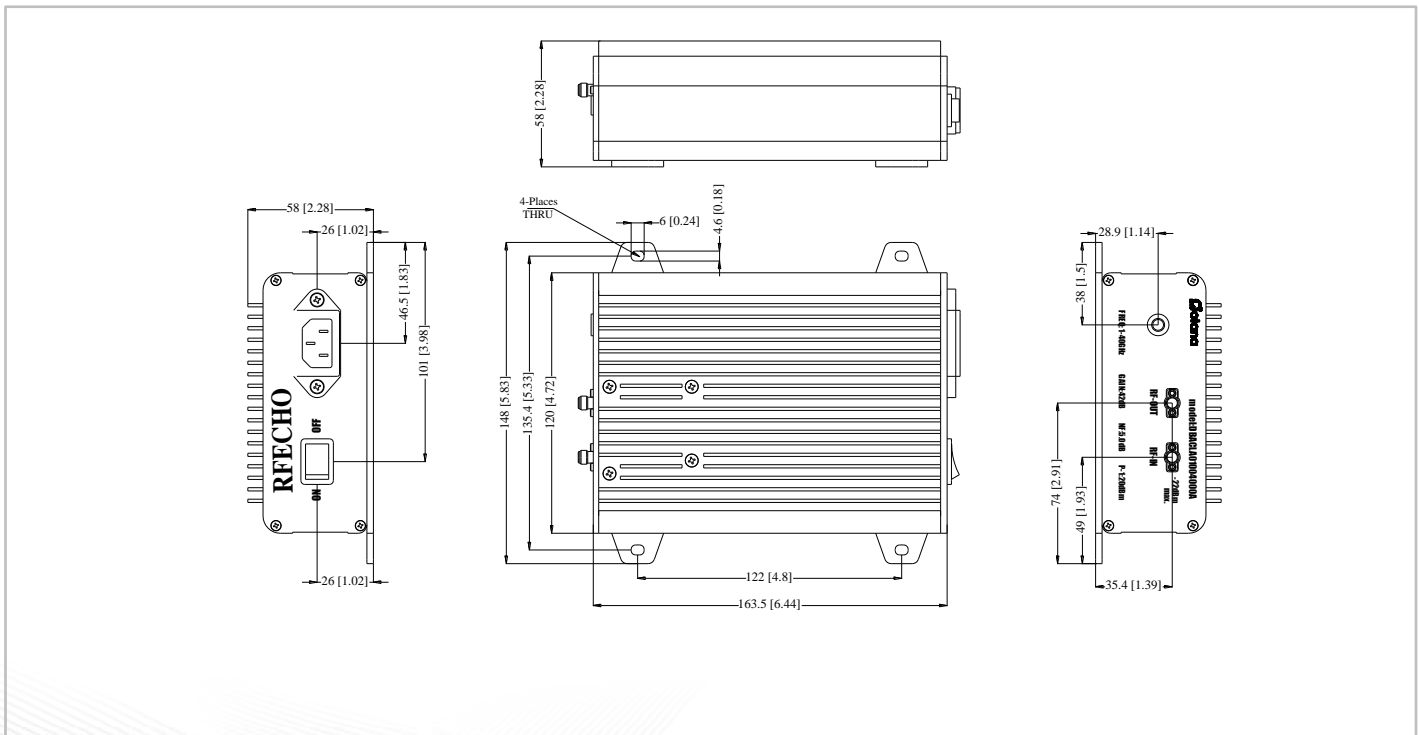





Gain

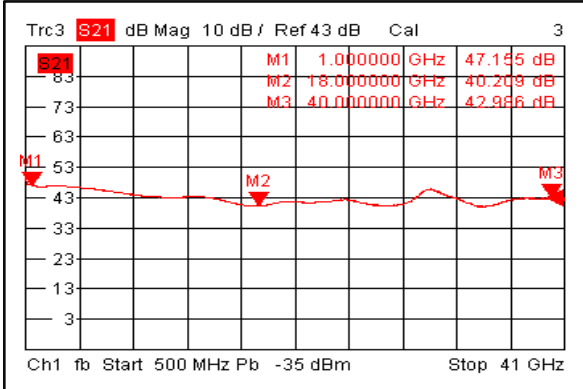


Input VSWR

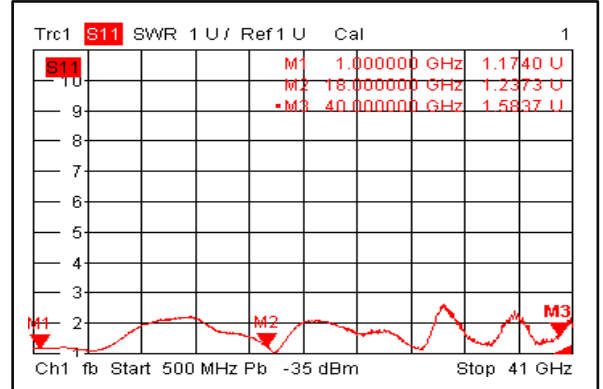


Output VSWR

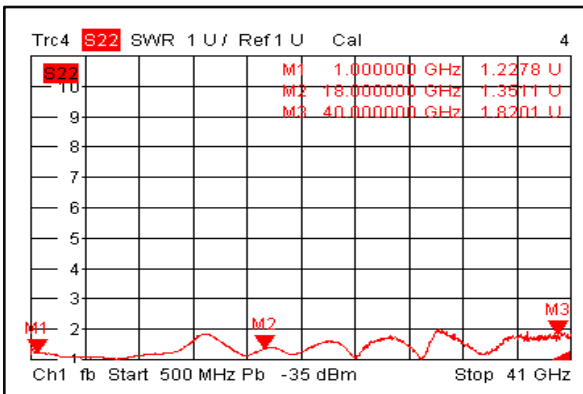


Isolation

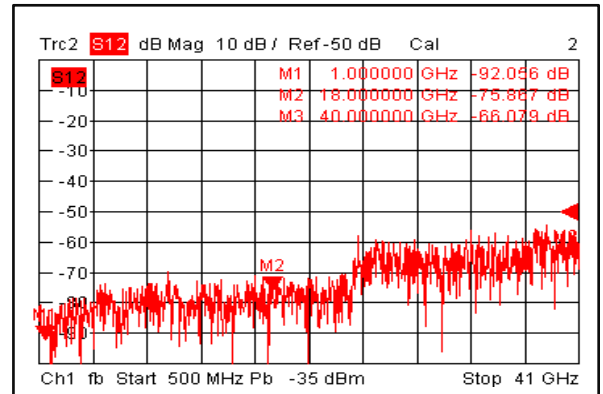

Gain vs. Output Power

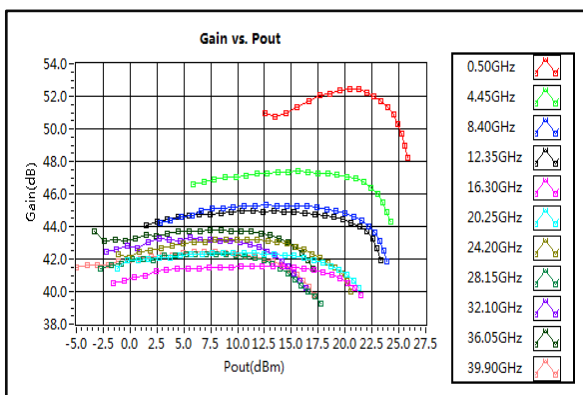


P1dB vs. Frequency

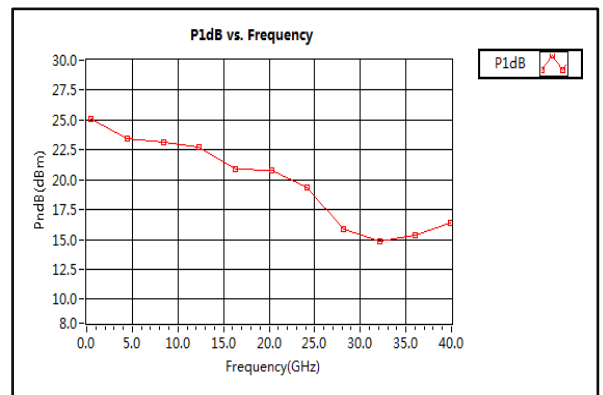





Gain

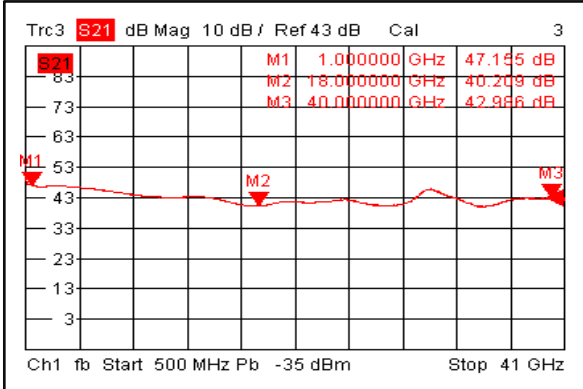


Input VSWR

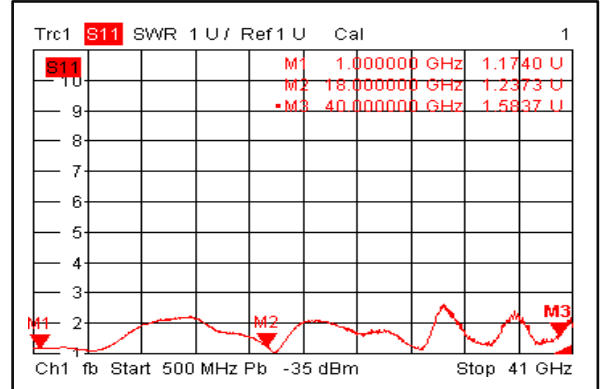


Output VSWR

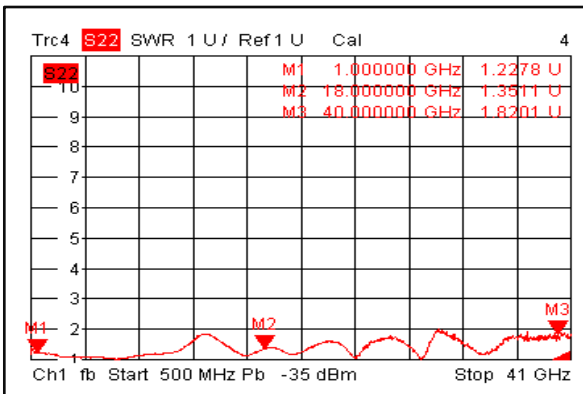

Isolation

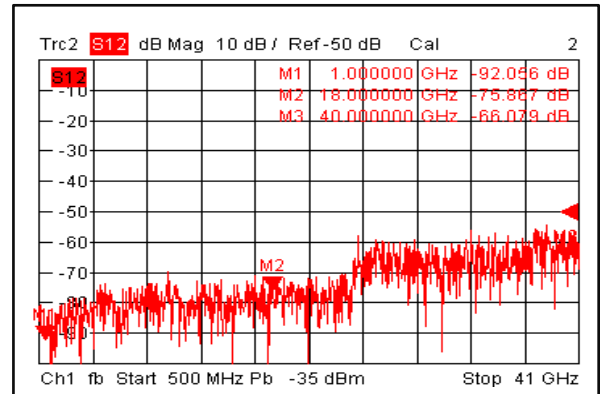

Gain vs. Output Power

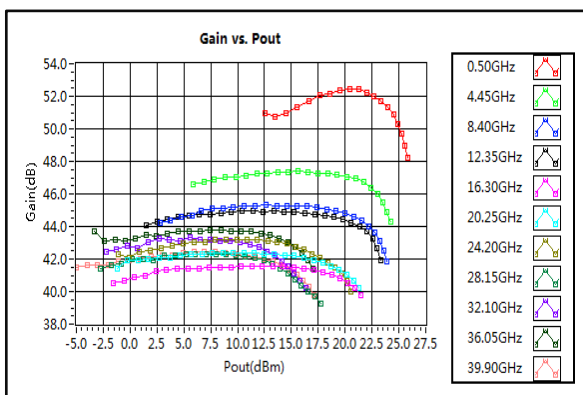

P1dB vs. Frequency

